AFRL-VS-TR-2002-1675

INSTALLATION AND OPERATION OF PARTICLE TRANSPORT SIMULATION PROGRAMS TO MODEL THE DETECTION AND MEASUREMENT OF SPACE RADIATION BY SPACE-BORNE SENSORS

Stanley Woolf

ARCON Corporation
260 Bear Hill Rd.
Waltham, MA 02451-1080

3 January 2002

Scientific Report No. 2

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

AIR FORCE RESEARCH LABORATORY
Space Vehicles Directorate
29 Randolph Rd
AIR FORCE MATERIEL COMMAND
Hanscom AFB, MA 01731-3010

This technical report has been reviewed and is approved for publication.

Contract Manager

Branch Chief

This document has been reviewed by the ESC Public Affairs Office and has been approved for release to the National Technical Information Service.

Qualified requestors may obtain additional copies form the Defense Technical Information Center (DTIC). All others should apply to the National Technical Information Service.

If your address has changed, if you with to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify AFRL/VSIM, 29 Randolph Rd., Hanscom AFB, MA 01731-3010. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document require that it be returned.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1. REPORT DATE *(DD-MM-YYYY)*	2. REPORT TYPE	3. DATES COVERED *(From - To)*
03-01-2002	Scientific Report No. 2	1 Aug 2000 - 31 July 2001

4. TITLE AND SUBTITLE
Installation and Operation of Particle Transport Simulation Programs to Model the Detection and Measurement of Space Radiation by Space-Borne Sensors

5a. CONTRACT NUMBER
F1962899-C-0077

5b. GRANT NUMBER

5c. PROGRAM ELEMENT NUMBER
63401F

6. AUTHOR(S)
Dr. Stanley Woolf

5d. PROJECT NUMBER
2822

5e. TASK NUMBER
GC

5f. WORK UNIT NUMBER
AR

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
ARCON Corporation
260 Bear Hill Road
Waltham, MA 02451-1080

8. PERFORMING ORGANIZATION REPORT NUMBER
UTD-STR-A002-01-630117

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
AFRL/VSBXR (Bronek Dichter)
29 Randolph Road
Hanscom AFB, MA 01731-3010

10. SPONSOR/MONITOR'S ACRONYM(S)

11. SPONSOR/MONITOR'S REPORT NUMBER(S)
AFRL-VS-TR-2002-1675

12. DISTRIBUTION/AVAILABILITY STATEMENT
Distribution Unlimited

13. SUPPLEMENTARY NOTES

14. ABSTRACT
This is a report of technical progress made during 1 Aug 00 to 31 Jul 01 in the areas of: (1) research and evaluation of particle transport simulation programs for modeling the detection and measurement of space radiation by space-borne sensors; (2) construction of realistic flight sensor computer models; (3) performance of particle transport calculation; (4) analysis of transport simulation results, including single particle tracking; (5) addition of new capabilities such as single particle tracking and specialized source geometry to an existing particle transport simulation program; (6) space-borne dosimeter simulation studies; (7) three-dimensional visualization of ITS-ACCEPT and MCNPX were applied to the modeling of the geometry files. The computer programs ITS-ACCEPT and MCNPX were applied to the modeling of the CEASE and HEP sensors. Shown in this report are listings of input files with geometry/materials drawings for the various simulation programs, annotated computer code listings showing program modifications and partial listings of computer code outputs for individual particle tracking and coincidence event identifications.

15. SUBJECT TERMS
Electron and proton transport, Monte Carlo simulation, Particle tracking, Space-borne sensor modeling, ITS-ACCEPT code, MCNPX code, Visualization, Dosimeters

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Bronek Dichter
U.	U	U	U	96	19b. TELEPHONE NUMBER *(include area code)* (781) 377-3991

Table of Contents

	Page
1. Introduction	1
2. Electron Transport Modeling	1
2.1 Electron Energy Deposition Calculations in Silicon Wafers	1
2.2 ITS-ACCEPT Electron/Photon Transport Simulations for the HEP Instrument	8
2.3 ITS-ACCEPT Program Enhancements	9
2.3.1 Disk and Rectangle Source Options	10
2.3.2 Individual Electron Track Option	11
3. Proton Transport Modeling	13
3.1 Energy Deposition Calculation - CEASE Telescope	13
3.2 Coincidence Event Identification - CEASE	15
3.3 Beam Source Subroutine for MCNPX	17
4. Dome Dosimeter Study	17
4.1 CEASE Dosimeter Models - ACCEPT and MCNPX	17
4.2 PASP Dosimeter Models - ACCEPT and MCNPX	20
5. Summary	23
References	24
Appendix 1	
Annotated ITS-ACCEPT Input Data File for the HEP In-Flight Instrument	25
Appendix 2	
Annotated ITS-ACCEPT Program Listings Incorporating Disk and Rectangle Source Geometry and Individual History Tracking Options	45
Appendix 3	
count.F Program Listing	65
Appendix 4	
source.F Program Listing for MCNPX Beam Source Allowing for User-supplied Location, Direction, Energy, Particle Specie	69
Appendix 5	
ITS-ACCEPT Input File for the CEASE-DD1 Dosimeter	71
Appendix 6	
MCNPX Input File for the CEASE-DD2 Dosimeter	73
Appendix 7	
ITS-ACCEPT Subroutine Modifications for Dome Source Option - Code Listings -	75
Appendix 8	
MCNPX Source Subroutine for PASP Dome D3	93

1. Introduction

The effort to be described in this report was performed as partial fulfillment of two primary objectives: (1) perform computer simulations of charged particle transport, energy and charge deposition in satellite-borne instrumentation used in research efforts of the Air Force Research Laboratory/ Space Weather Center of Excellence (AFRL/VSBXR) to detect and characterize (by type, energy, intensity, *etc.*) particles associated with ionizing radiation in space; (2) transfer this simulation capability to AFRL/VSBXR and provide advice to Air Force researchers on its use; and (3) create and install additional capabilities in existing Monte Carlo transport programs to: (a) simulate a number of source geometries encountered in the VSXBR research program; and (b) permit "observation" of individual electron track histories.

During this reporting period we worked with the Monte Carlo simulation programs listed below at ARCON and provided assistance and guidance for their use at AFRL. The Monte Carlo transport simulations programs that were used at both ARCON and AFRL in this effort are:

- "ITS 3.0 – Integrated TIGER Series of Coupled Electron/Photon Monte Carlo Code System" [1] - ACCEPT – General three-dimensional transport code
- "MCNPX, Version 2.1.5 – Monte Carlo transport code for neutrons, photons, electrons, mesons, protons, deuterons, tritons, ^{3}He, alpha" [2]

In addition to the two codes listed above, we also acquired a three dimensional geometry and visualization program, Sabrina[3], that while written primarily for use with the MCNP code series, can also be used for reading and writing geometry files for ITS/ACCEPT.

In the following sections, we briefly discuss the computer programs listed above, some of their interrelationships, and provide descriptions and examples of our application of these codes to the modeling of particle transport and trajectory tracking in the CEASE[4] and HEP[5] instruments.

2. Electron Transport Modeling

2.1 Electron Energy Deposition Calculations in Silicon Wafers

Transport calculations for 4 MeV and 6 MeV electrons incident on rectangular silicon dosimeter wafers (0.05cm × 0.9cm × 0.9cm). Twelve source geometry configurations were assumed for each source energy. Duplicate simulation runs were made with both ITS-ACCEPT[1] and MCNPX[2]. The result of performing these calculations accomplished two objectives: 1) provide a set of input files for both simulation programs that could be modified, if desired, and used by AFRL personnel for performing these and similar simulations; and 2) compare the relative advantages and disadvantages of the ACCEPT and MCNPX codes for electron transport. The input files were also set up to produce electron pulse-height spectra. We provided interpretation of the pulse-height spectra results for both codes, the presentations of which are formatted differently, and showed for all practical purposes, the equivalence of their answers.

For all source configurations and both source energies, the Monte Carlo runs were made using 200,000 case histories. The source geometries consisted of: normally incident electron

beams (or point sources); point isotropic sources; disk sources-normal incidence; disk sources-isotropic incidence. All sources were located on the wafer surfaces, either on the 0.9cm × 0.9cm surface (Fig.1a) or on the 0.05cm × 0.9cm surface (Fig. 1b). The input and output files for all 24 Monte Carlo runs were provided to AFRL. Default values for the electron low energy cut-off were used with both ACCEPT ($0.05E_{source}$) and MCNPX (1.0 keV). Since the default value for the MCNPX cut-off energy was set much lower than the ACCEPT value, the run times for MCNPX (~1 hr) far exceeded those for ACCEPT (~0.5 min) by two orders of magnitude. When the same electron cut-off energy was used in MCNPX, the run time was found to be a factor of 1.5 greater than that required for ACCEPT. With the current version of ACCEPT, the lowest electron cut-off energy allowed by the code is 24.5 keV. When the program was run with this cut-off, the run time for 200000 histories increased to 1.17 minutes with no significant change in the results. To achieve the low energy cut-off value of 1 keV, it would have been necessary to use ACCEPTP and XGENP, the P-code versions of ACCEPT and XGEN, containing low-energy electron physics. ACCEPT energy deposition results are shown in Figs.2-6 for 6 MeV sources. Fig. 2 displays the total energy deposited in the silicon wafer shown in Fig.1a for the eight source configurations described and labeled in Table 1.

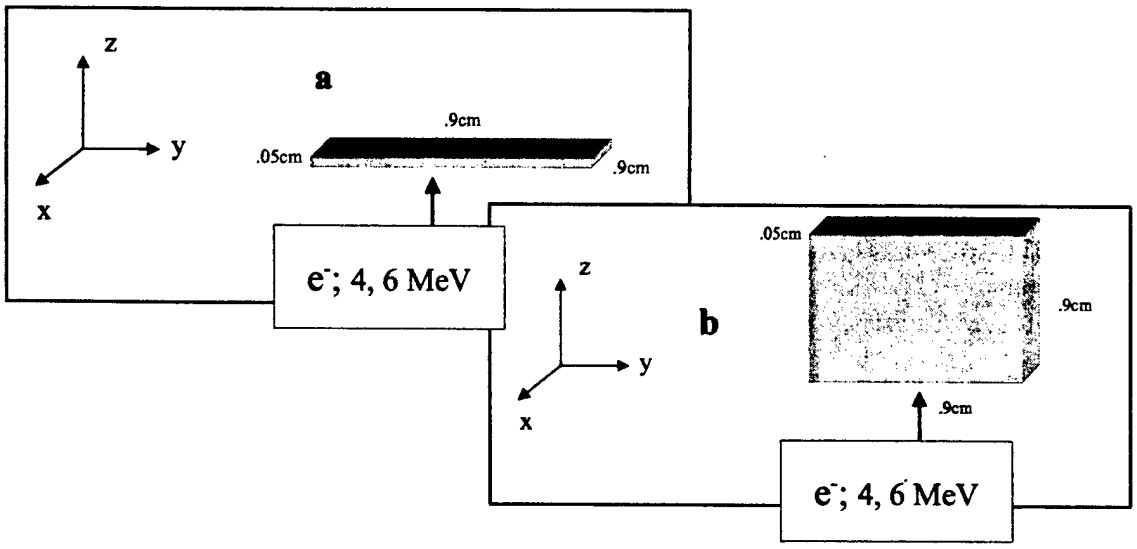

Figure 1. Electron sources incident on silicon dosimeter wafer

Table 1.
Source Configurations for Transport Simulation of 4.0 and 6.0 MeV Electrons in Silicon

Electron Soure Configuration	Source Geometry
(1) Single Beam, Normal Incidence at (.45,.45,0.)	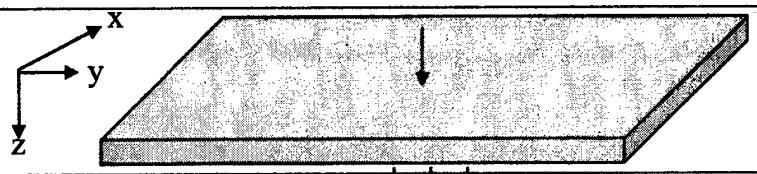
(2) Disk Source, Rad. = 0.1cm, Normal Incidence centered at (.45,.45,0.)	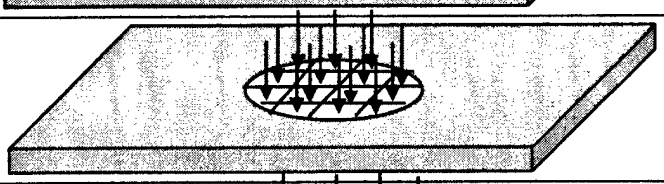
(3) Disk Source, Radius = 0.2cm, Normal Incidence centered at (.45,.45,0.)	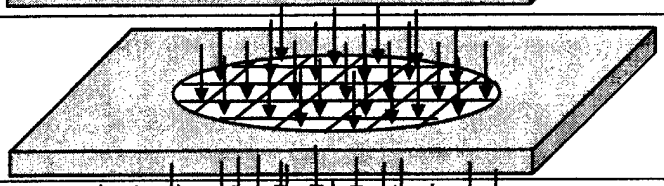
(4) Disk Source, Radius = 0.449cm, Normal Incidence centered at (.45,.45,0.)	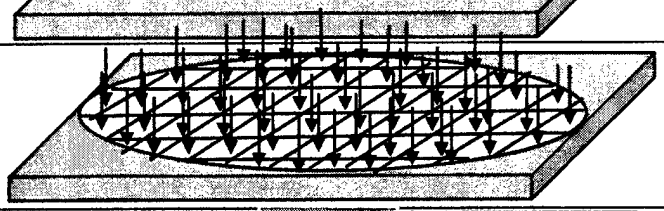
(5) Point Isotropic, 45° cone centered at (.45,.45,0.)	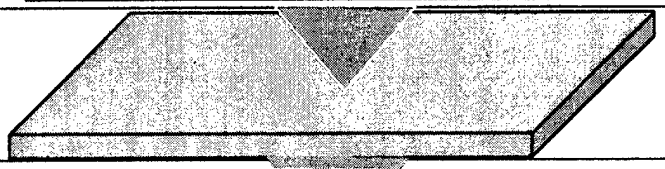
(6) Disk Source, Rad. = 0.1cm, Isotropic 45° cones centered at (.45,.45,0.)	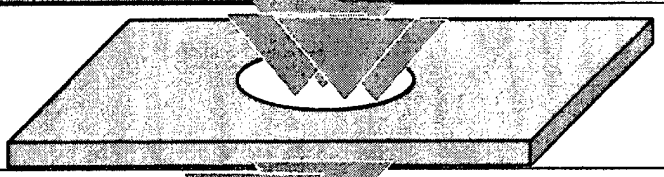
(7) Disk Source, Rad. = 0.2cm, Isotropic 45° cones centered at (.45,.45,0.)	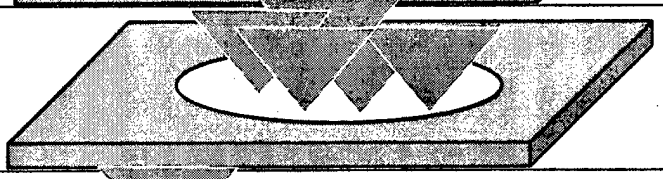
(8) Disk Source, Rad. = 0.449cm, Isotropic 45° cones centered at (.45,.45,0.)	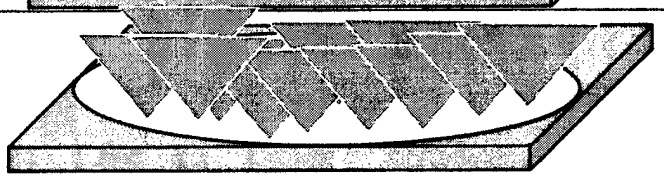

The choice of 200000 histories resulted in poor statistics for the point sources, except in the immediate vicinity of the source point. The statistics were much improved, however, everywhere in the silicon wafer (~1%-5% estimated standard error) with the use of spatially

uniform disk sources. The number of histories (200000) was chosen as an expedient to ensure input file correctness. The run files corresponding to the source configurations shown in Table 1 were turned over to AFRL for production runs.

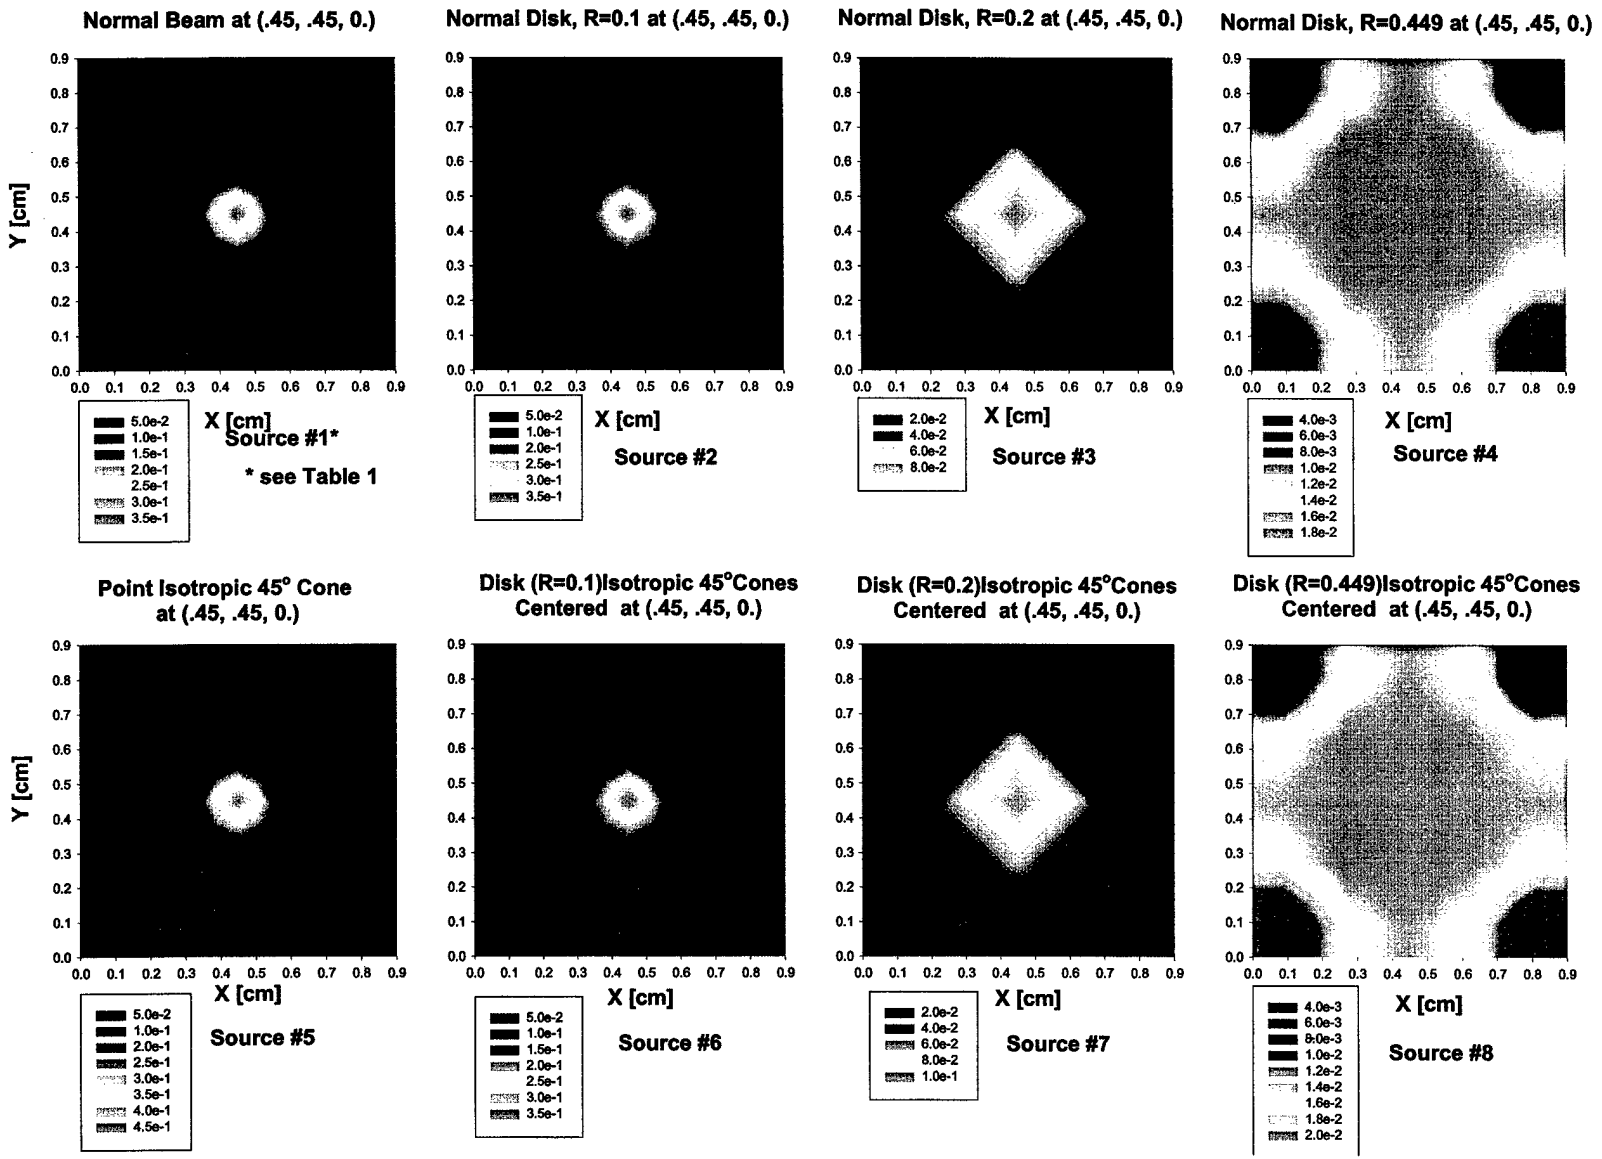

Figure 2. Total energy deposition [MeV] in Si wafer ($0.05\times0.9\times0.9 cm^3$, see Figure 1a) for 8 source geometries; electron source energy = 6 MeV

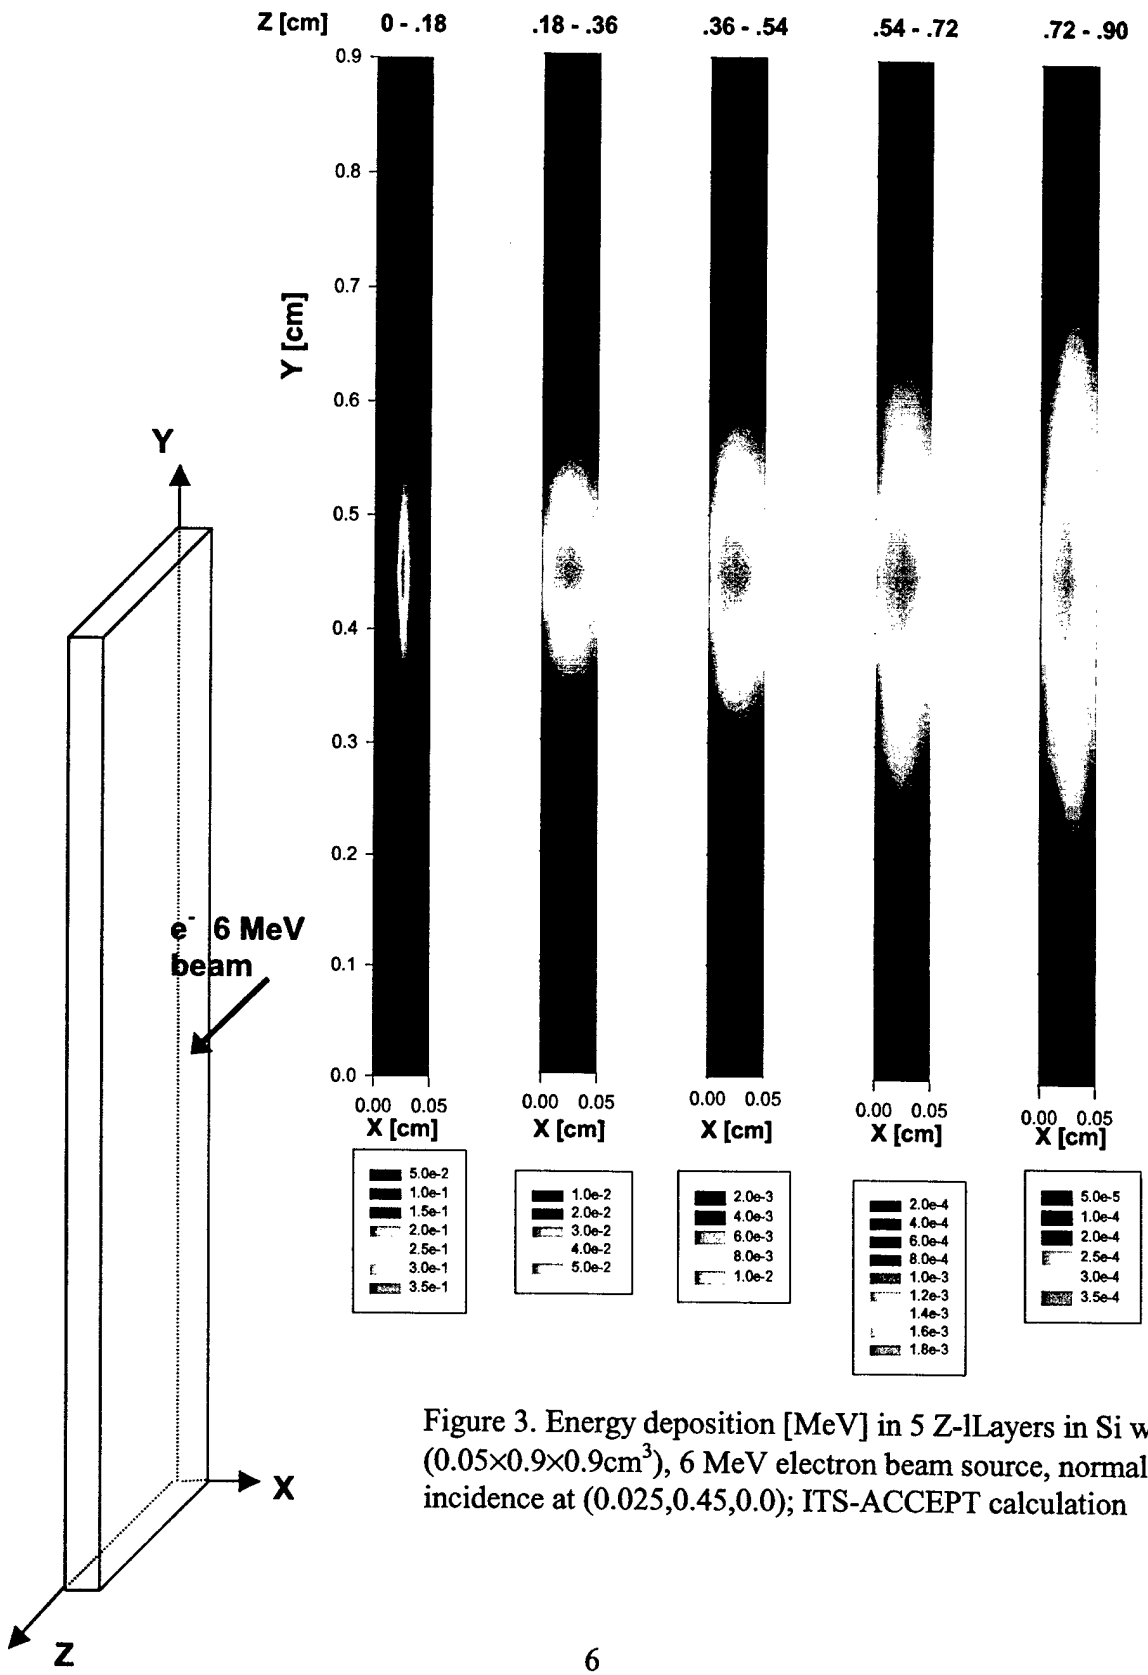

Figure 3. Energy deposition [MeV] in 5 Z-lLayers in Si wafer ($0.05\times0.9\times0.9 cm^3$), 6 MeV electron beam source, normal incidence at (0.025,0.45,0.0); ITS-ACCEPT calculation

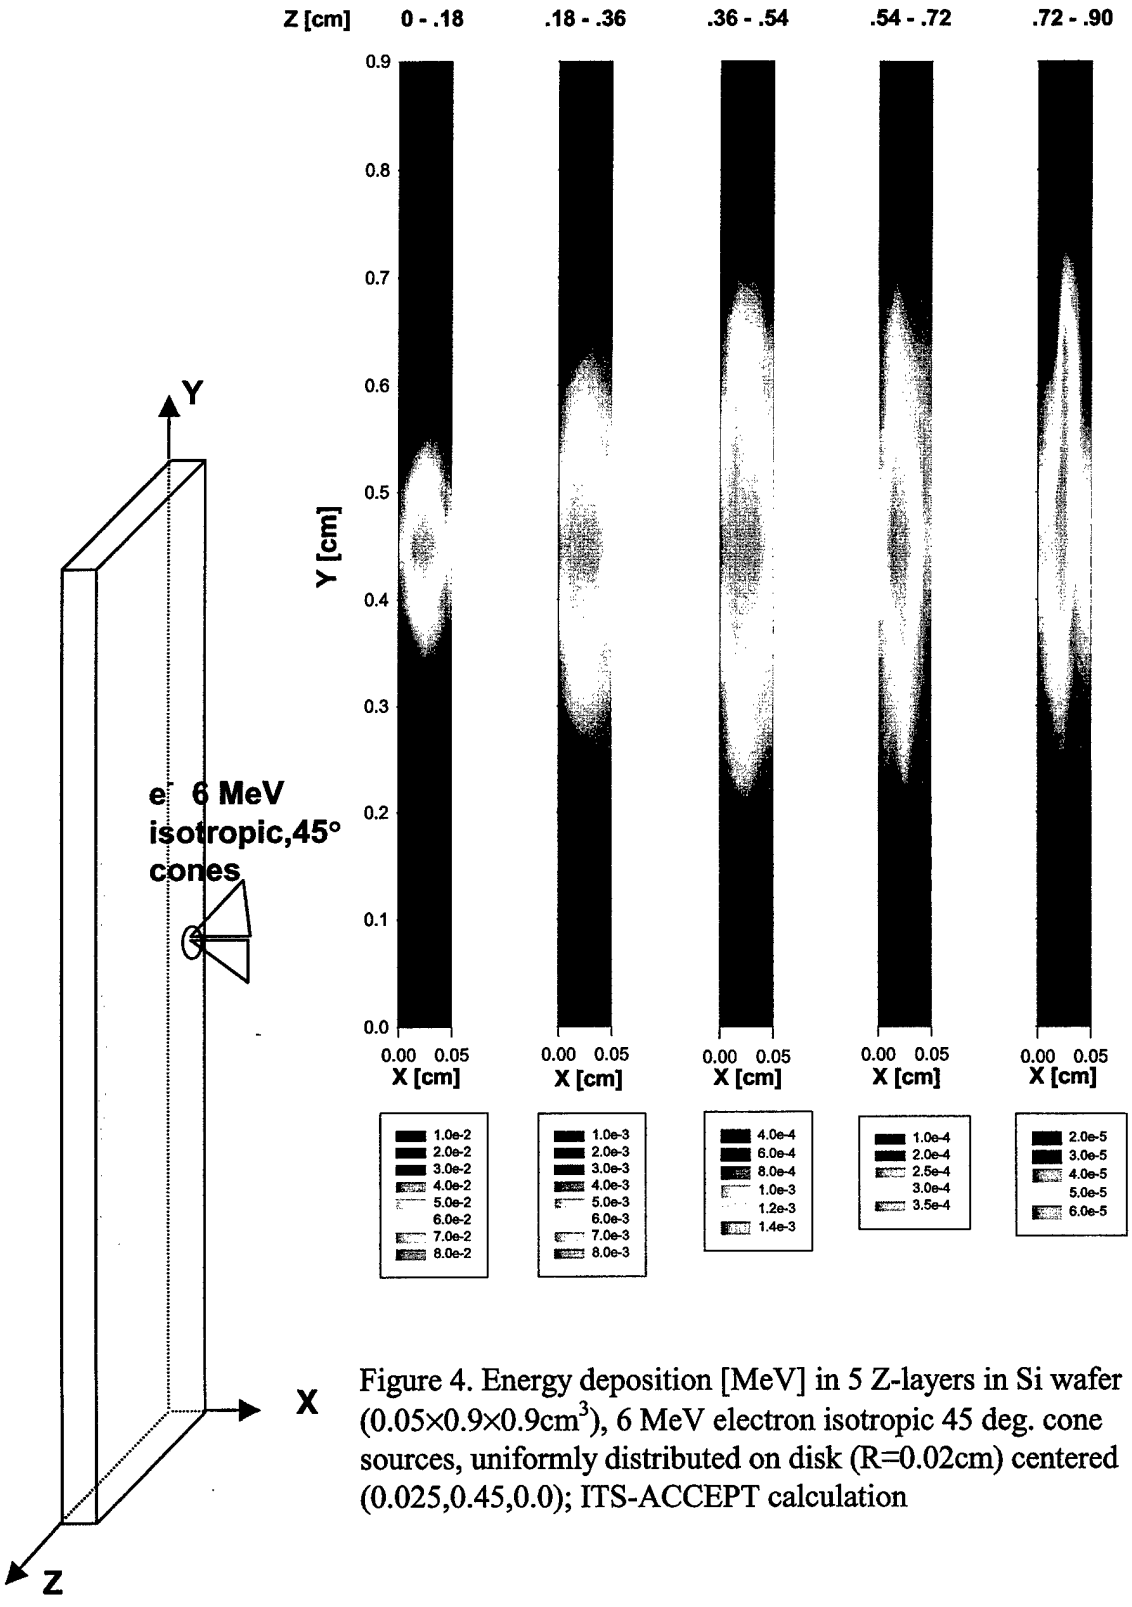

Figure 4. Energy deposition [MeV] in 5 Z-layers in Si wafer ($0.05\times0.9\times0.9cm^3$), 6 MeV electron isotropic 45 deg. cone sources, uniformly distributed on disk (R=0.02cm) centered at (0.025,0.45,0.0); ITS-ACCEPT calculation

2.2 ITS-ACCEPT Electron/Photon Transport Simulations for the HEP Instrument

A new ACCEPT geometry input file for the in-flight version of the HEP instrument was created from a complete set of manufacturing drawings supplied by Amptek, Inc. [5]. This geometry description exactly mimics the geometry description written during the first year of this effort for MCNPX [6]. The ACCEPT geometry description, which contains the same degree of detail as the manufacturing drawings, permits us to: (1) take advantage of the speed and efficiency of the ACCEPT code for performing coupled electron-photon transport calculations in complicated structures; and (2) use the ACCEPT code to confirm the validity of the MCNPX geometry description by comparing electron transport results obtained with the two programs. Unlike ACCEPT, MCNPX can be used to perform transport calculations for protons, neutrons, mesons, and other particle species. It is therefore important to have the ACCEPT version of the HEP geometry to use as an independent verification of the MCNPX geometry description.

Figure 5 shows a cut-away view of the HEP sensor. This illustration was drawn using SABRINA [3] an interactive, three-dimensional geometry visualization and modeling program

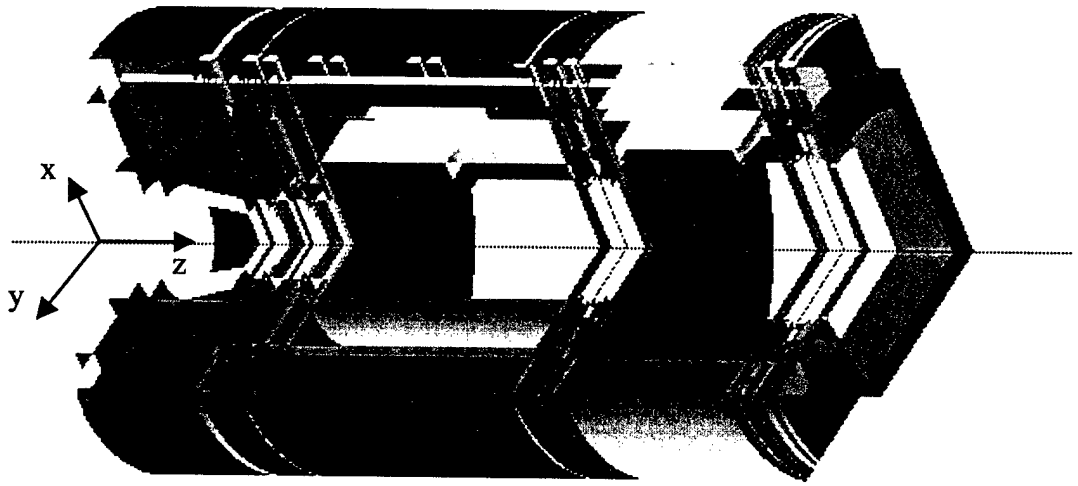

Figure 5. Sabrina [3] rendering of ITS-ACCEPT [1] geometry model of HEP [5] Flight Sensor

that can be used to construct and visualize geometry models for both MCNPX and ACCEPT. Additional useful features of the SABRINA program are: automatic conversion of ACCEPT models to the MCNPX format and particle track ray-tracing.

The ACCEPT input file corresponding to the HEP flight sensor depicted in Figure 5 is listed in Appendix 1. Several ACCEPT runs were made to test the robustness of the geometry file. The purpose was to uncover "holes" (errors) in the geometry specification that are not immediately obvious from the pictures generated with SABRINA. An efficient way to determine which, if any, cells are improperly defined in the input file is to run a large number of case histories for several source configurations and energies. The diagnostic messages that appear in the ACCEPT output when a particle has "lost its way" are of limited value. Because geometry file flaws are usually manifested by abrupt program halts when ten particles have been lost, we have found that the most effective method for constructing highly detailed geometry files is to build up the model in gradual stages of complexity. Test runs of ACCEPT were made using this gradual approach until the model illustrated in Figure 5 passed all tests for robustness. The run file consisting of 318 geometric bodies defining 505 material cells is listed in Appendix 4. This file was used to simulate a 25 MeV electron disk source normally incident on the front face (z = 0 plane) of the instrument.

2.3 ITS-ACCEPT Program Enhancements

The ITS-ACCEPT Monte Carlo program modifications that were made fall into two categories: the addition of new source options; and the addition of code that permits the user to view the energy deposition contributions of individual electron tracks. The primary motivation for the source option enhancement was supplied by the fact that the standard disk source option in ACCEPT does not allow for the specification of electron source beam slant angles without slanting the source plane. Source electrons emanating from a plane with off-normal angles of incidence could not originate at equidistant points from the target. The demonstration of this is given in a set of electron transport runs that were made for the aluminum-void-silicon slab geometry shown in Figure 6. Runs were made for six source disk slant angles (θ = 0, 15, 30, 45, 60, 75°) The electron source energy in all cases was 3.5 MeV. Because of the manner in which the standard disk source option in ACCEPT is implemented, it was necessary to adjust the position of the disk center for each θ value in order to ensure that the source disk not intersect with the target medium. An ACCEPT input data file corresponding to the illustration of Figure 6 with θ = 45° is shown in Figure 7. For the case shown, the radius R of the disk source was set at 1.0 cm. For the 45° slant source it was necessary to place the coordinates of the disk center at X_s = 2.5, Y_s = 2.5, Z_s = -0.7071067 to avoid having source electrons originate inside the target medium. While the ACCEPT code does not permit this source condition, it could be modified to allow sources originating in the interior of a scattering medium.

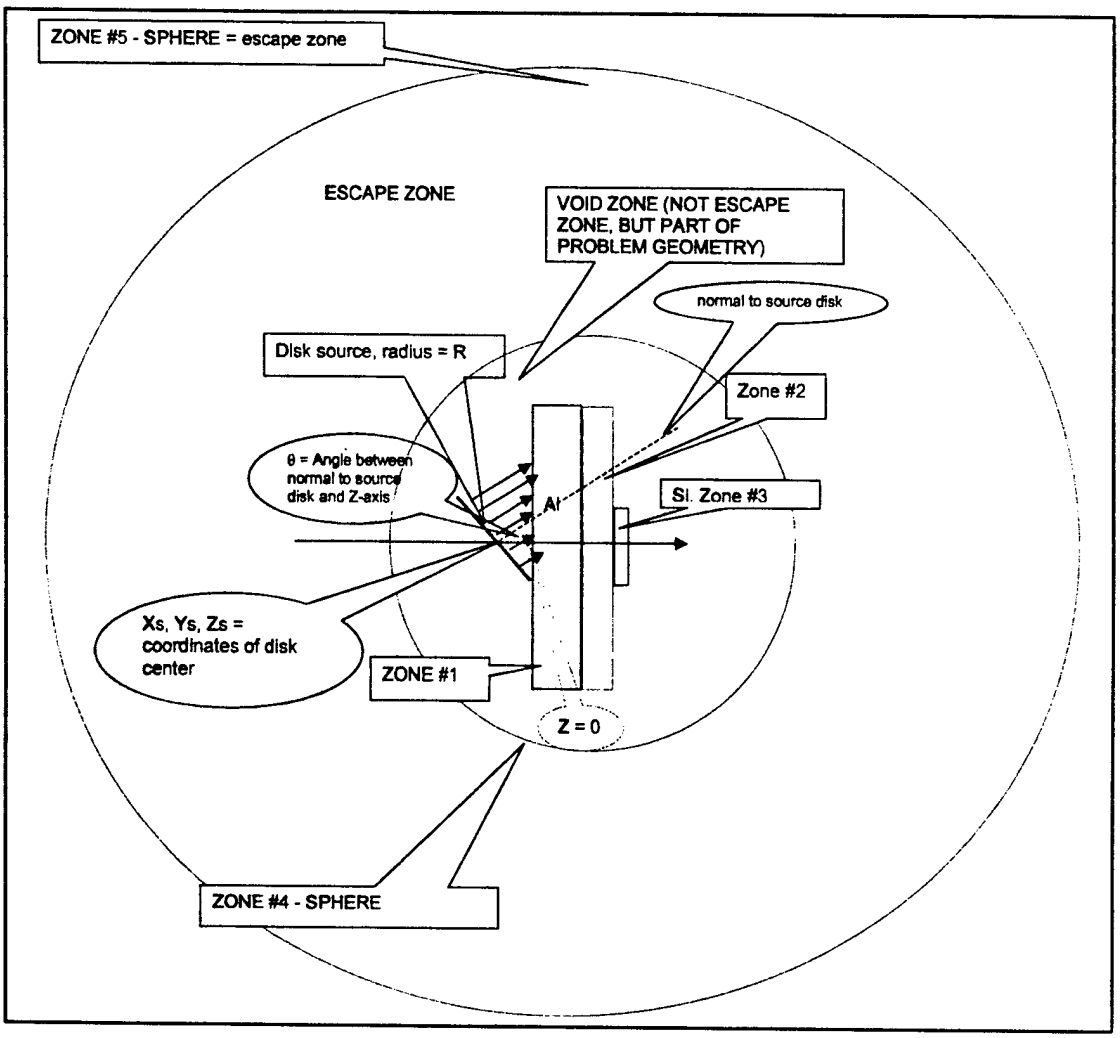

Figure 6. Aluminum / void / silicon ACCEPT problem geometry (not drawn to scale) with slant disk source as described in the input data file shown in Figure 7.

2.3.1 Disk and Rectangle Source Options

A capability was added to the ACCEPT program to allow the use of disk and rectangular spatially uniform distributed sources (electrons or photons) with provision for changing the slant angle of the source beam direction without slanting the source plane itself. These new options are now implemented in the code by the addition of:

(1) a line such as

```
"RECTANGLE-SOURCE  2.05 2.95 2.05 2.95 0.0 0.0"
```

to the ACCEPT input file for the rectangle source case. The 6 numbers (required) are the bounding coordinates of the source rectangle (`XMIN, XMAX, YMIN, YMAX, ZMIN, ZMAX`);

and (2)

```
"CIRCLE-SOURCE  2.5 2.5 0.0 3.5 2.5 0.0"
```

to the ACCEPT input file for the disk source case. The 6 (required) numbers are the `X, Y, Z` coordinates of the disk center and a point on the disk circumference. The program computes the

source disk radius and checks internal consistency by comparing this value with the value entered on the "RADIUS" input line. In both the rectangle and circle source cases, if an error in the input data violates the conditions for geometric validity, informative diagnostics messages are printed in the ACCEPT output file, and the run is aborted. One restriction in the use of these options is that the orientation of the source planes cannot be arbitrarily chosen. Their orientation must be perpendicular to any one of the three Cartesian coordinate axes. Since the choice of orientation of the source beam is allowed to be arbitrary, this restriction, which greatly simplified the re-programming of ACCEPT, does not result in sacrifice of utility.

Test runs were made for both the rectangle and disk source cases. The disk source results were validated by matching the old disk source results for normal incidence.

```
TITLE
  3.5 MEV ON AL/VOID/SI,SLANT DISK SOURCE(THETA=45deg)ZS=-.7071
********************** GEOMETRY ************************
GEOMETRY
*1
  RPP    0.000  5.000  0.000  5.000  0.000  0.635
*2
  RPP    0.000  5.000  0.000  5.000  0.635  0.792
*3
  RPP    2.050  2.950  2.050  2.950  0.792  0.842
*4
  SPH     2.500  2.500  0.421  4.243
*5
  SPH     2.5    2.5    0.421  10.0
  END
*ZONES
  Z01 +1
  Z02 +2
  Z03 +3
  Z04 +4 -1 -2 -3
* ESCAPE ZONE IS A VOID SPHERE OF RADIUS  10 CM ENCLOSING THE SLAB
  Z05 +5  -1 -2 -3 -4
END
*MATERIAL
 1
 0
 2
 0
 0
************************ SOURCE ********************
ELECTRONS
ENERGY  3.5
POSITION    2.5 2.5  -0.7071067
 RADIUS 1.0
DIRECTION 45.0  0.0
```

Figure 7. ACCEPT Input data file for 3.5 MeV 45° slant disk source incident on aluminum / void / silicon configuration shown in Figure 6.

2.3.2 Individual Electron Track Option

The second modification to ACCEPT permits the user to view the energy deposition contributions of individual case histories (electron tracks) in as many as 10 problem geometry cells. To implement this option, a line of the following form

"INDIVIDUAL-HISTS 92 145 93 146"

is added to the ACCEPT input file. The four numbers shown in the above example are the cell numbers corresponding to the electrically active parts (92, 145) of the CEASE front and back silicon detectors, respectively, and their corresponding electrically inactive parts (93, 146). A supplementary output file (EDSHOW.TXT) is produced by this version of ACCEPT and consists of: (a) tables (5 columns), for each cell, of (1) the case history number, energy deposition contributions [MeV] by the (2) primary electron, (3) knock-on electrons, (4) bremsstrahlung produced secondary electrons [see Figure 8], and (5) total energy deposition; and (b) a summary table showing the total energy deposition, for each history, in each cell (for example, 4 columns corresponding to cells 92, 145, 93, 146)[see Figure 9]. This last summary table allows for quick recognition of coincidence events occurring in the front and back detectors.

ENERGY DEPOSITION IN CELL NO. 92

Hist. no.	Primary	Knock-on	Secondary	Total
1	.44027E-01	.00000E+00	.00000E+00	.44027E-01
2	.52327E-01	.00000E+00	.00000E+00	.52327E-01
3	.77735E-01	.00000E+00	.00000E+00	.77735E-01
4	.11630E+00	.00000E+00	.00000E+00	.11630E+00
5	.53479E-01	.00000E+00	.00000E+00	.53479E-01
6	.61459E-01	.00000E+00	.00000E+00	.61459E-01
7	.10316E+00	.00000E+00	.00000E+00	.10316E+00
8	.53607E-01	.00000E+00	.00000E+00	.53607E-01
9	.49054E-01	.00000E+00	.00000E+00	.49054E-01
96	.44499E-01	.00000E+00	.00000E+00	.44499E-01
97	.76406E-01	.00000E+00	.00000E+00	.76406E-01
98	.71468E-01	.00000E+00	.00000E+00	.71468E-01
99	.88710E-01	.00000E+00	.00000E+00	.88710E-01
100	.56262E-01	.00000E+00	.00000E+00	.56262E-01

ENERGY DEPOSITION IN CELL NO. 145

Hist. no.	Primary	Knock-on	Secondary	Total
1	.45224E+00	.00000E+00	.00000E+00	.45224E+00
2	.00000E+00	.00000E+00	.00000E+00	.00000E+00
3	.00000E+00	.00000E+00	.00000E+00	.00000E+00
4	.38100E+00	.00000E+00	.00000E+00	.38100E+00
94	.00000E+00	.00000E+00	.00000E+00	.00000E+00
95	.00000E+00	.00000E+00	.00000E+00	.00000E+00
96	.35406E+00	.00000E+00	.00000E+00	.35406E+00
97	.00000E+00	.00000E+00	.00000E+00	.00000E+00
98	.18983E+00	.00000E+00	.00000E+00	.18983E+00
99	.40809E+00	.00000E+00	.00000E+00	.40809E+00
100	.00000E+00	.00000E+00	.00000E+00	.00000E+00

Figure 8. Portion of EDSHOW.TXT file produced by ACCEPT when the "INDIVIDUAL-HISTS" option is exercised. The table itemizes contributions to energy deposition attributable to primary, knock-on and secondary electrons for every case history.

	TOTAL ENERGY DEPOSITION IN CELLS			
	92	145	93	146
Hist.no.				
1	.44027E-01	.45224E+00	.00000E+00	.00000E+00
2	.52327E-01	.00000E+00	.00000E+00	.00000E+00
3	.77735E-01	.00000E+00	.00000E+00	.00000E+00
4	.11630E+00	.38100E+00	.00000E+00	.00000E+00
5	.53479E-01	.44387E+00	.00000E+00	.00000E+00
6	.61459E-01	.00000E+00	.00000E+00	.00000E+00
7	.10316E+00	.00000E+00	.00000E+00	.00000E+00
8	.53607E-01	.16434E+00	.00000E+00	.00000E+00
9	.49054E-01	.44833E+00	.00000E+00	.00000E+00
			•	
			•	
			•	
			•	
97	.76406E-01	.00000E+00	.00000E+00	.00000E+00
98	.71468E-01	.18983E+00	.00000E+00	.00000E+00
99	.88710E-01	.40809E+00	.00000E+00	.00000E+00
100	.56262E-01	.00000E+00	.00000E+00	.00000E+00

Figure 9. Portion of EDSHOW.TXT file produced by ACCEPT when the "INDIVIDUAL-HISTS" option is exercised. This table lists total energy deposition in all requested cells for every case history.

Program listings of the ACCEPT subroutines that were modified to incorporate the "RECTANGLE-SOURCE", "CIRCLE-SOURCE" and "INDIVIDUAL-HISTS" options are given in Appendix 2.

3. Proton Transport Modeling

3.1 Energy Deposition Calculations - CEASE Telescope

Energy deposition plots (see Figure 10) for electrons and protons were supplied by AFRL [6]. The curves shown in Figure 10 represent calculations for the front (DFT - thickness = 0.015 cm) and back (DBT - thickness = 0.05cm) silicon wafer detectors in the CEASE telescope. This provided an opportunity to test the validity of our CEASE model and the physical realism of MCNPX proton transport calculations. The CEASE model [7] written earlier for MCNPX was used in eight Monte Carlo runs corresponding to proton source energies, 4, 4.5, 5, 7.5, 9.5,15, 30, 100 MeV with normally incident protons (disk sources covering the telescope aperture). The MCNPX simulation results, $Edep_{DBT}$ vs. $Edep_{DFT}$ for the proton sources, are plotted in Figure 11. They appear to closely track the proton energy deposition curves of Figure 10.

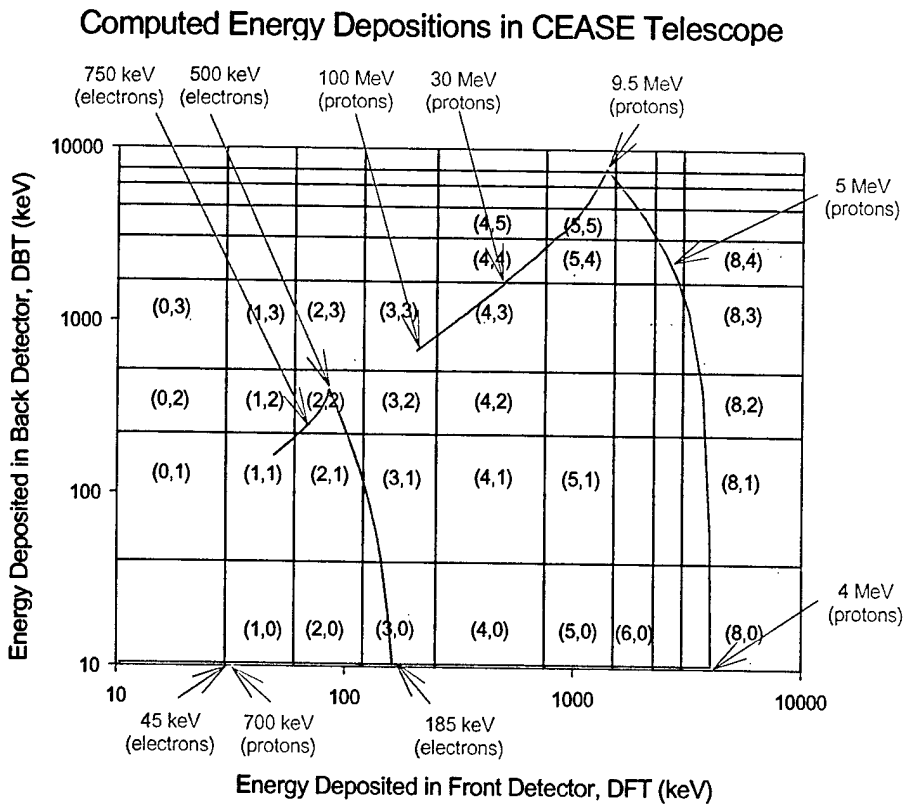

Figure 10. Computed energy depositions due to protons and electrons in DBT vs. DFT for the CEASE telescope[4,6]

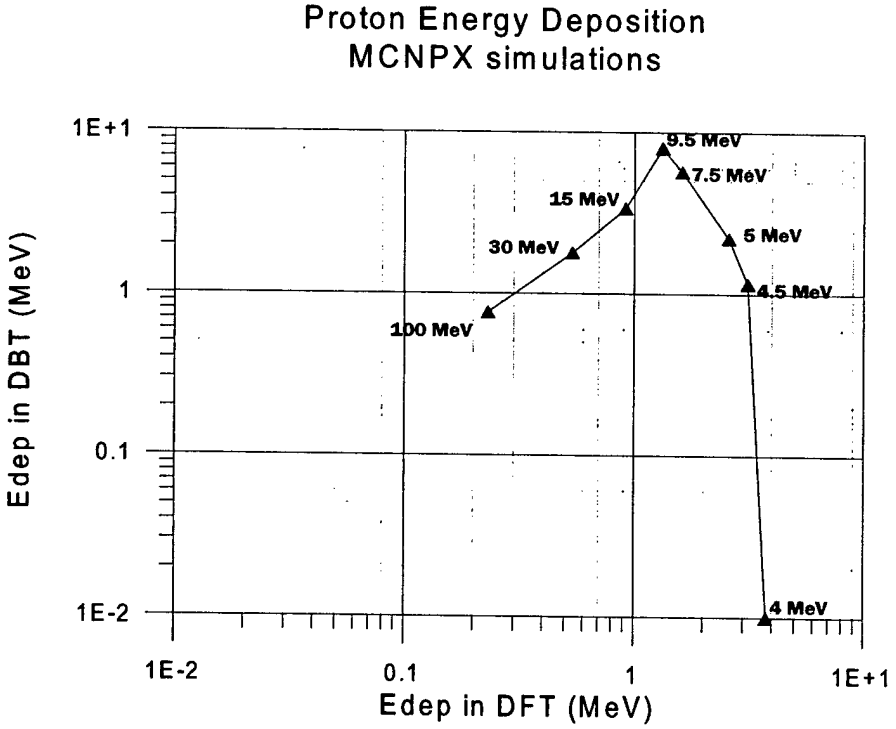

Figure 11. Energy depositions due to protons in DBT vs. DFT for the CEASE telescope as computed with the MCNPX simulation program.

3.2 Coincidence Event Identification - CEASE

A short FORTRAN program, count.F, was written to analyze the track file ("ptrac") produced by MCNPX in order to identify coincidence events in the DFT and DBT detectors. This program lists the energy deposition from protons in each detector for each proton track history and enables the investigator to recognize and evaluate coincidence events. The program is also configured to record the energy deposition in any cell of the CEASE simulation geometry. An annotated sample output file displaying the accounting results for 10000 proton histories (100 MeV proton source in CEASE aperture, normal incidence) in shown in Figure 12. The cell numbers containing the coincidence events listed at the end of the output identify tracks of interest that can be re-examined. The program listing of count.F is given in Appendix 3.

MCNPX - CEASE cell #	Total energy deposition	# of protons in cell	energy deposition due to protons	# of electrons in cell	energy deposition due to electrons	# of neutrons in cell	Energy deposition due to neutrons	# of photons in cell	Energy deposition due to photons
1	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
2	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
3	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
					•				
					•				
24	0.47660E-02	13	0.47660E-02	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
25	0.14176E+00	125	0.14176E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
26	0.31609E+00	246	0.31603E+00	0	0.00000E+00	0	0.00000E+00	1	0.58880E-04
27	0.46626E+00	357	0.46478E+00	0	0.00000E+00	0	0.00000E+00	1	0.14821E-02
28	0.60600E+00	467	0.60600E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
29	0.73127E+00	549	0.73111E+00	0	0.00000E+00	0	0.00000E+00	1	0.16188E-03
30	0.83742E+00	631	0.83742E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
31	0.96039E+00	704	0.95784E+00	0	0.00000E+00	0	0.00000E+00	2	0.25468E-02
32	0.10499E+01	760	0.10499E+01	0	0.00000E+00	0	0.00000E+00	1	0.45840E-04
33	0.11213E+01	807	0.11213E+01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
34	0.12038E+01	874	0.12038E+01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
35	0.12848E+01	906	0.12848E+01	0	0.00000E+00	0	0.00000E+00	1	0.21850E-04
36	0.13170E+01	931	0.13170E+01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
37	0.15761E-01	290	0.15761E-01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
38	0.94740E+00	333	0.94740E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
39	0.12217E-01	705	0.12217E-01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
40	0.28122E+01	700	0.28122E+01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
41	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
42	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
43	0.17045E+00	229	0.17045E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
44	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
45	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
46	0.64099E+00	605	0.64099E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
47	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
48	0.26440E-02	0	0.00000E+00	0	0.00000E+00	1	0.13955E-05	3	0.26426E-02
49	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
50	0.26963E+01	198	0.26587E+01	0	0.00000E+00	6	0.63279E-02	31	0.31316E-01
51	0.75840E+00	228	0.75837E+00	0	0.00000E+00	1	0.12650E-04	1	0.11150E-04
					•				
					•				
61	0.94892E+00	667	0.94866E+00	0	0.00000E+00	0	0.00000E+00	2	0.26012E-03
62	0.20318E+00	684	0.20318E+01	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00
63	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00	0	0.00000E+00

Figure 12. Output file from count.F interpreting particle track, coincidence event and energy deposition data from MCNPX-ptrac file for protons, electrons, neutrons and photons.

```
  68   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  69   0.15190E+00   523   0.15190E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  70   0.18603E+00   209   0.18603E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  71   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  72   0.34538E+00   142   0.34538E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  73   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  74   0.14732E+01   581   0.14732E+01     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  75   0.26610E+01   671   0.26585E+01     0   0.00000E+00     0   0.00000E+00     1   0.25213E-02
  76   0.22022E+01   606   0.22017E+01     0   0.00000E+00     0   0.00000E+00     1   0.45914E-03
  77   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  78   0.79859E+00   657   0.79859E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  79   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
  80   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
                                                    •
                                                    •
 128   0.12088E+01   238   0.12080E+01     0   0.00000E+00     1   0.45992E-05     1   0.80680E-03
 129   0.10351E+01   209   0.10351E+01     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00
 130   0.88508E+00   180   0.88487E+00     0   0.00000E+00     1   0.11277E-04     3   0.20188E-03
 131   0.88338E+00   164   0.88333E+00     0   0.00000E+00     1   0.37793E-04     1   0.87200E-05
                                                    •
                                                    •
 146   0.45599E-02     1   0.45599E-02     0   0.00000E+00     0   0.00000E+00     0   0.00000E+00

                  neutrons   photons                                    protons
no. of escaped particles =    114    140  0  0  0  0  0  0    145  0
 escaped energy =    0.59827E+01
total energy deposited =     0.93343E+02
   from protons =     0.90556E+02
   from photons =     0.69015E-01
   from neutrons =     0.24006E-01
   from electrons =     0.00000E+00
   from inelastic collisions =    0.26944E+01
   number of proton coincidence events =  272
   number of neutron coincidence events =    4
   number of photon coincidence events =    2

history numbers for proton coincidence events
   2    3    4    5    7   14   16   23   27   30   35   40   42   45   48
  51   54   61   64   69   72   73   79   83   86   88   89   93   94   95
  99  103  106  111  114  115  117  121  125  129  134  137  138  147  156
 161  169  172  176  177  181  183  185  188  192  200  201  205  212  217
 219  220  221  222  226  230  232  235  236  240  245  247  255  259  264
 269  271  276  281  282  285  290  295  296  302  306  310  314  316  320
 325  326  328  334  338  341  342  347  348  354  357  358  369  373  374
 375  376  384  388  396  398  400  402  407  408  409  412  418  421  422
 426  427  430  433  436  437  440  446  455  460  467  468  472  475  480
 483  485  489  491  496  498  500  503  505  509  511  512  521  523  524
 533  537  541  542  551  557  558  565  569  571  576  578  582  585  586
 589  591  592  596  601  602  605  614  618  619  629  632  635  642  645
 656  659  662  663  664  669  670  672  676  679  681  684  687  690  693
 697  701  705  707  709  712  717  721  722  729  734  746  753  759  762
 767  768  776  779  786  788  793  796  799  801  804  807  809  813  816
 819  824  828  833  841  843  845  847  850  853  854  859  863  865  867
 869  871  874  876  885  886  888  889  892  901  904  906  913  916  921
 925  931  934  936  937  939  943  946  961  963  964  970  973  979  980
 983  997
```

Figure 12 (cont.). Output file from count.F interpreting particle track, coincidence event and energy deposition data from MCNPX-ptrac file for protons, electrons, neutrons and photons.

3.3 Beam Source Subroutine for MCNPX

A specialized source subroutine that allows the user to run beam sources at arbitrary positions and arbitrary orientations was written for use with MCNPX. MCNPX makes allowance for user-supplied source routines in addition to those supplied in the program. This is accomplished by omission of the source descriptor records in the MCNPX input data file. When this is done, the programs searches for the user-supplied "SUBROUTINE SOURCE". In our version the user enters, as input to screen prompts, the source position (x, y, z), source direction cosines (u, v, w), source particle type (ipt), source particle energy (MeV), geometry surface number on which or cell number in which the source origination point is located. The program listing for source.F is given in Appendix 4.

4. Dome Dosimeter Study

Electron and proton transport calculations were made for the CEASE DD1 and DD2 dosimeters [4] and PASP Dome D2 and D3 dosimeters [8,9] using the ITS/ACCEPT and MCNPX simulation programs. The purpose of these calculations was to provide a means for determining the effects of differences in shield geometry on dose measurements in the same radiation environment. The data sets obtained with the CEASE and PASP dosimeters, normalized to take into account differences in shielding geometry, would then be used to study the solar cycle dependence of the electron dose from the outer radiation belt.

The schematic shown in Figure 13 for the CEASE DD1 and DD2 dosimeter assemblies was provided by AFRL[10]. The dosimeter assembly consists of a flat rectangular silicon diode resting on an aluminum oxide substrate, which in turn is mounted on an aluminum base. The dosimeter is capped with an aluminum plate.

4.1 CEASE Dosimeter Models - ACCEPT and MCNPX

Models for the original CEASE DD1 and DD2 geometries were obtained directly using the "CIRCLE-SOURCE" option as described in Section 2.3.1, above. Isotropic electron sources were assumed uniformly distributed on the disc surface as shown in Figure 14. We then wrote and installed a new source option, "DOME SOURCE", for ITS/ACCEPT in which the isotropic, inward-directed electron source is assumed to be uniformly distributed on the surface of a thin void hemispherical shell with the same radius as the disc shield plates. This source is depicted in the ACCEPT geometry schematic of Figure 15. The ACCEPT input file corresponding to the geometries shown in Figures 14 and 15 is listed in Appendix 5 for the CEASE DD1 dosimeter. Both the "CIRCLE-SOURCE" and "DOME SOURCE" input data (see annotations) are shown in the same file listing to conserve space.

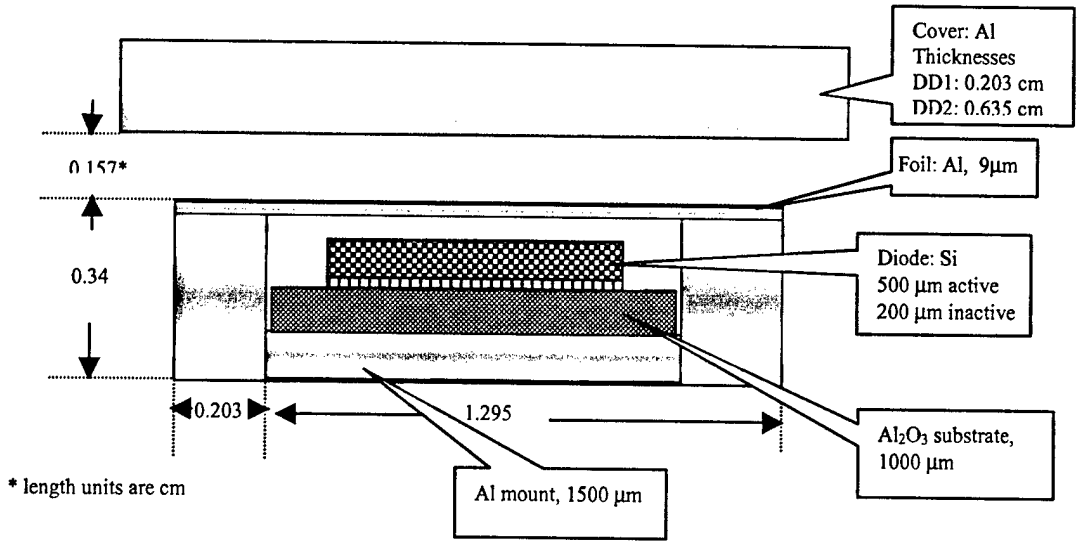

Figure 13. CEASE DD1 and DD2 dosimeter assemblies [10].

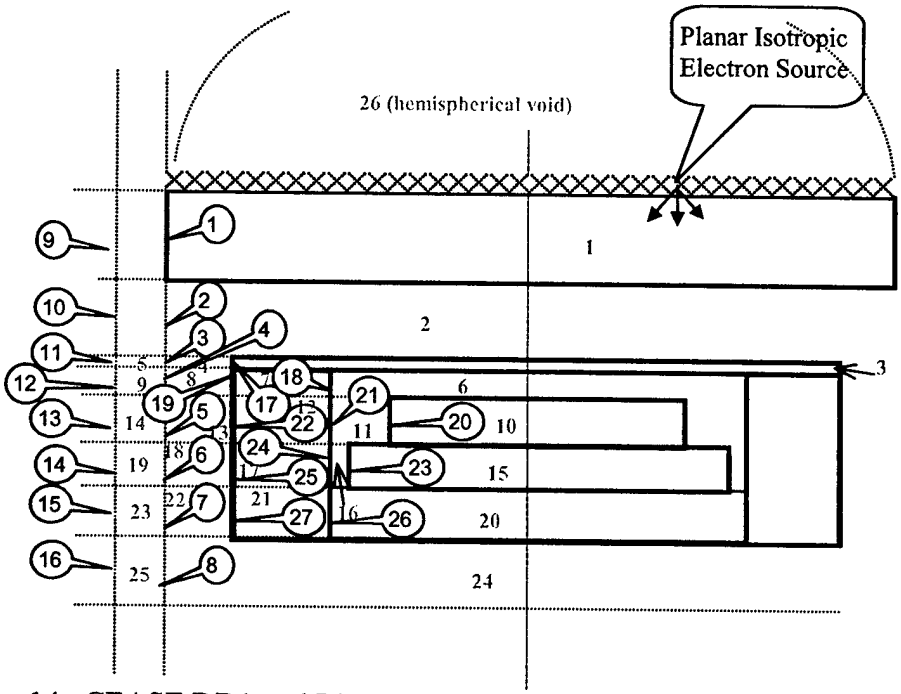

Figure 14. CEASE DD1 and DD2 dosimeter geometry schematic for ACCEPT showing plane isotropic electron source; ◯ = geometry zones; nn = material cells.

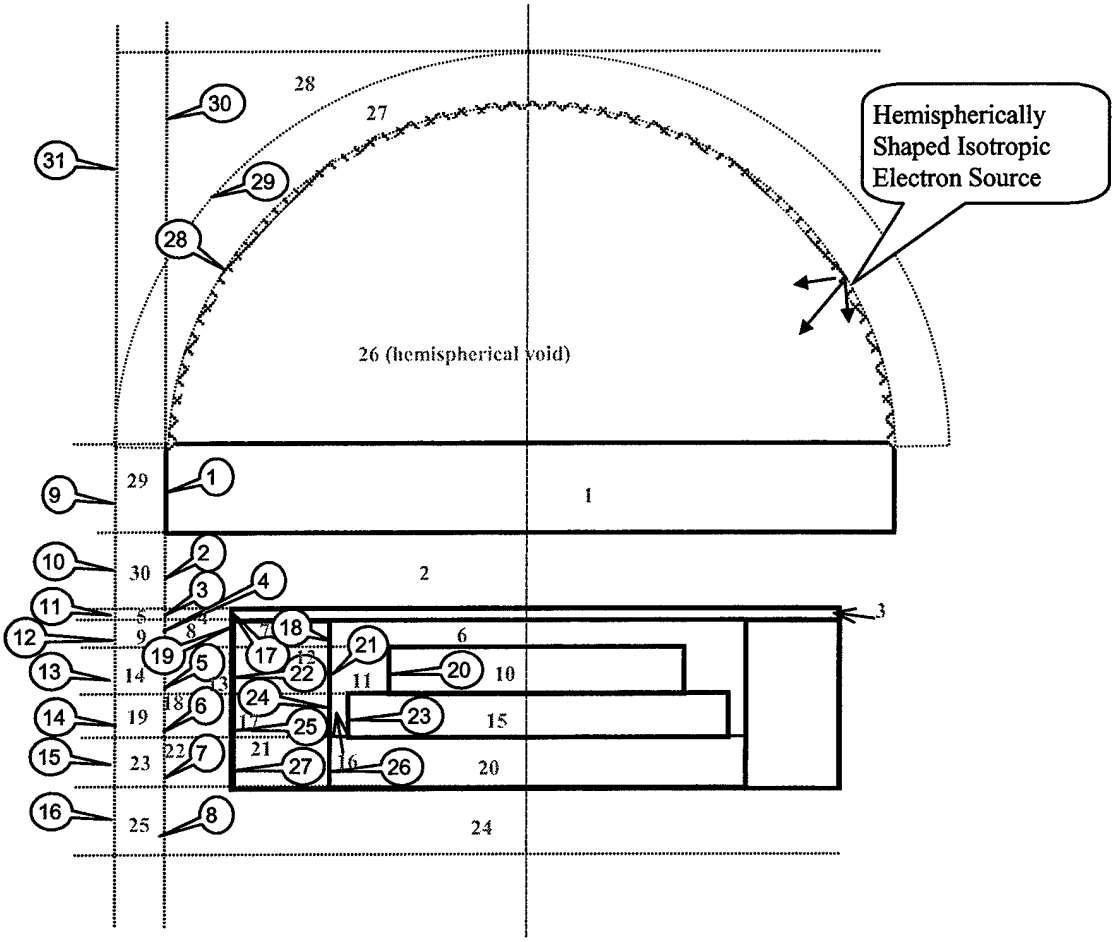

Figure 15. CEASE DD1 and DD2 dosimeter geometry schematic for ACCEPT showing hemispherically shaped isotropic electron source; ◯ = geometry zones; nn = material cells.

The equivalent simulation scenarios were executed using MCNPX. Figure 16 is a surface and cell schematic for the DD1, DD2 MCNPX model corresponding to that shown for ACCEPT in Figure 15. The corresponding MCNPX input file for DD2 is given in Appendix 6. For the case of the flat plate source, the MCNPX-supplied source provided a cosine-isotropic source option that could be implemented using the run input data file. It was necessary to write a source subroutine for MCNPX that allowed isotropy in angle rather than cosine. It was also necessary to write new source subroutines for the hemispherical shell sources. These code modifications provided, along with appropriate geometry factor adjustments, a tool for the AFRL researchers to compare simulated dosimeter responses with different source geometry assumptions.

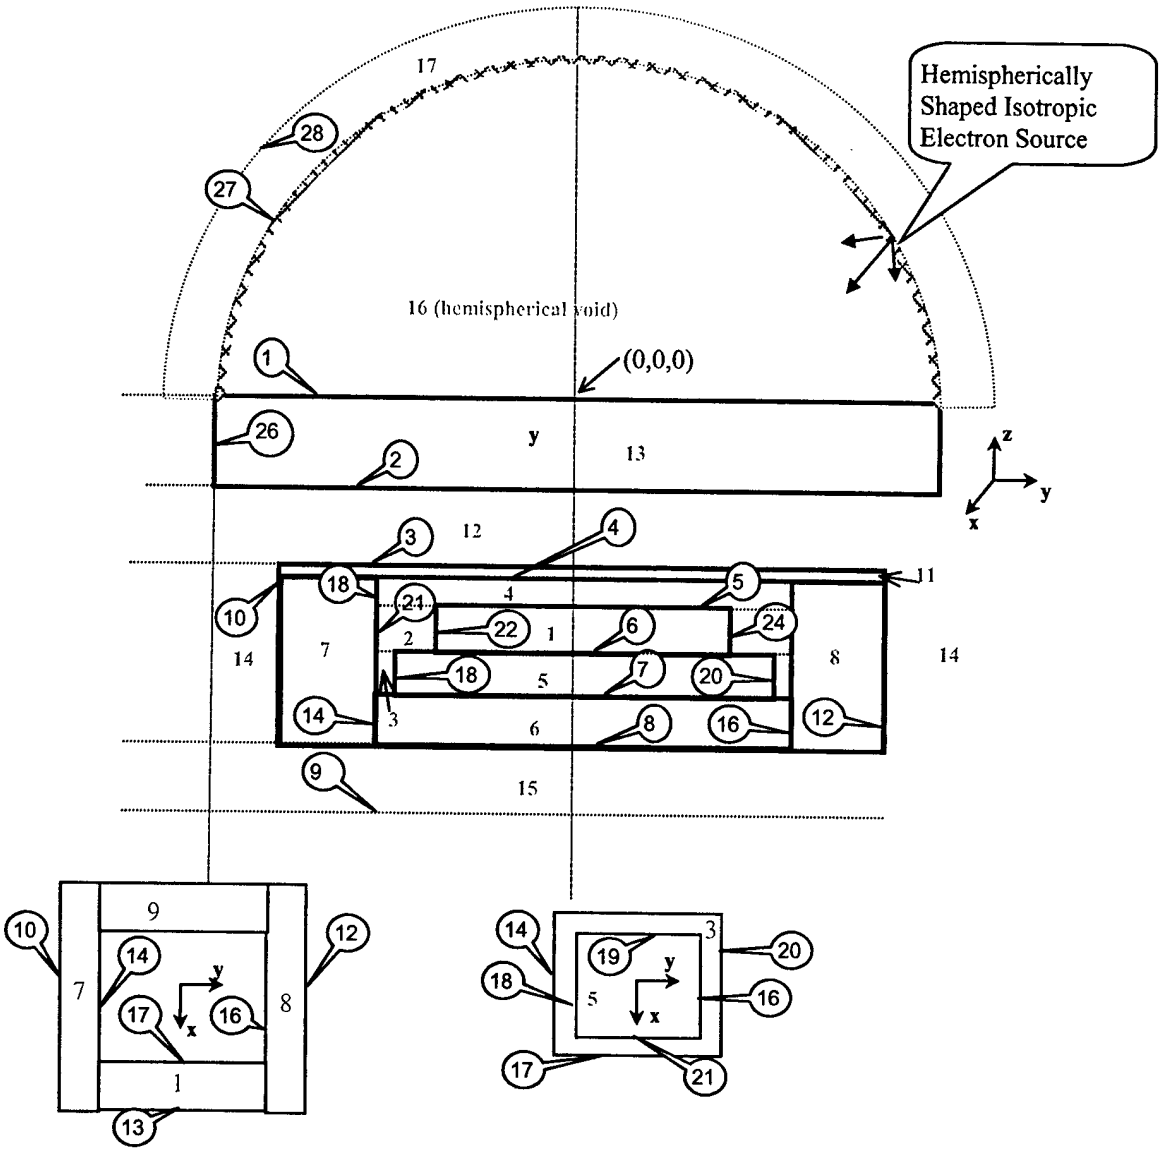

Figure 16. CEASE DD1 and DD2 dosimeter geometry schematic for MCNPX showing hemispherically shaped isotropic electron source; ◯ = surfaces; nn = material cells.

4.2 PASP Dosimeter Models - ACCEPT and MCNPX

The PASP dome dosimeters were modeled using the "HEMISPHERICAL DOME SOURCE" option in ITS/ACCEPT and new source routines for MCNPX. The ACCEPT geometry schematics and source configuration for the PASP Dome 2 and Dome 3 dosimeters are shown in Figures 17a and 17b, respectively. The corresponding geometry schematics for MCNPX are shown in Figures 18a and 18b. The computer code listings for the "DOME SOURCE" option in ACCEPT and the specialized source subroutines for MCNPX are given in Appendices 7 and 8, respectively.

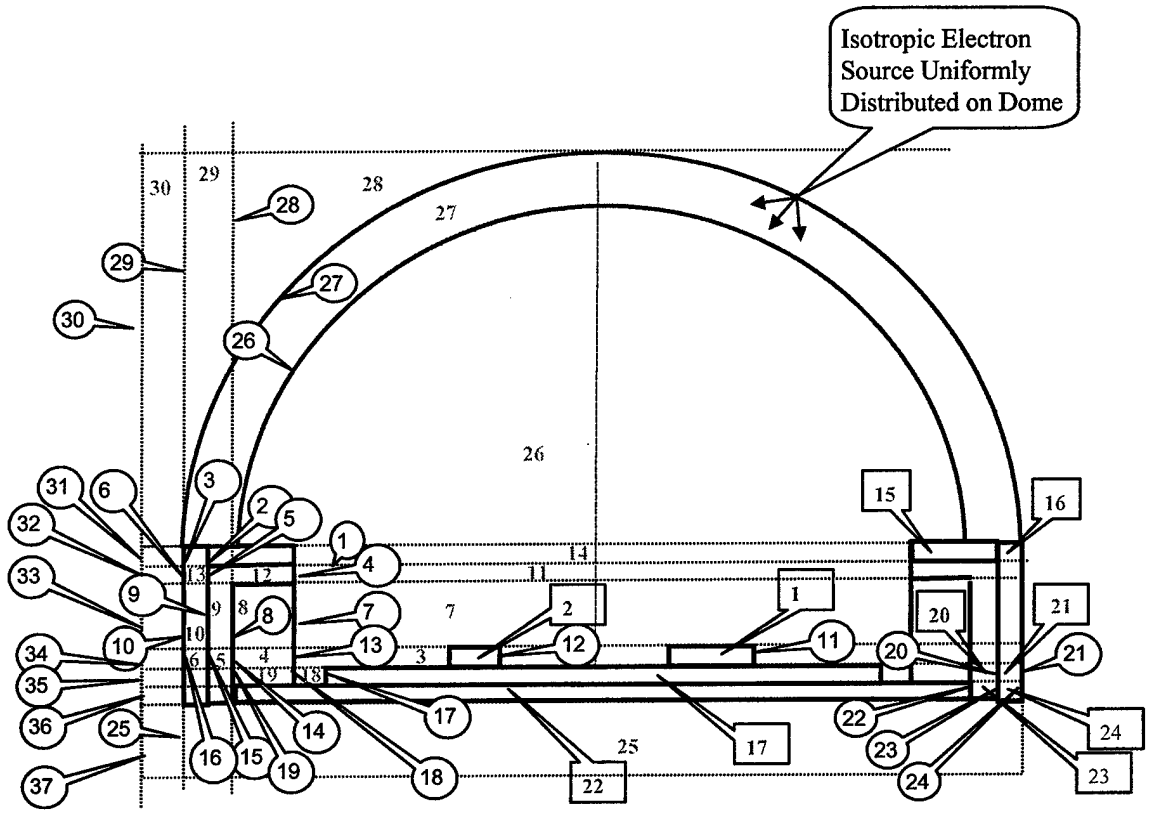

Figure 17a. "PASP Dome 2" dosimeter[8,9] geometry Schematic for ACCEPT showing isotropic electron source incident on surface of Al dome; = geometry zones; nn = material cells.

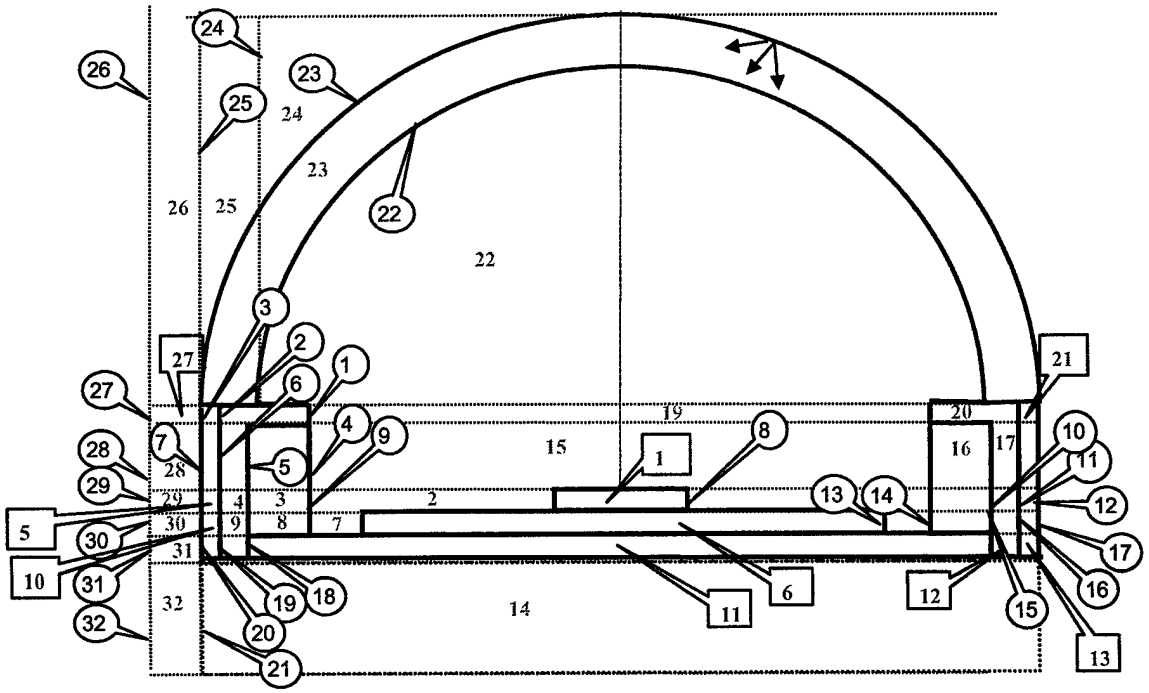

Figure 17b. "PASP Dome 3" dosimeter[8,9] geometry schematic for ACCEPT showing isotropic electron source incident on surface of Al dome; = geometry zones; nn = material cells.

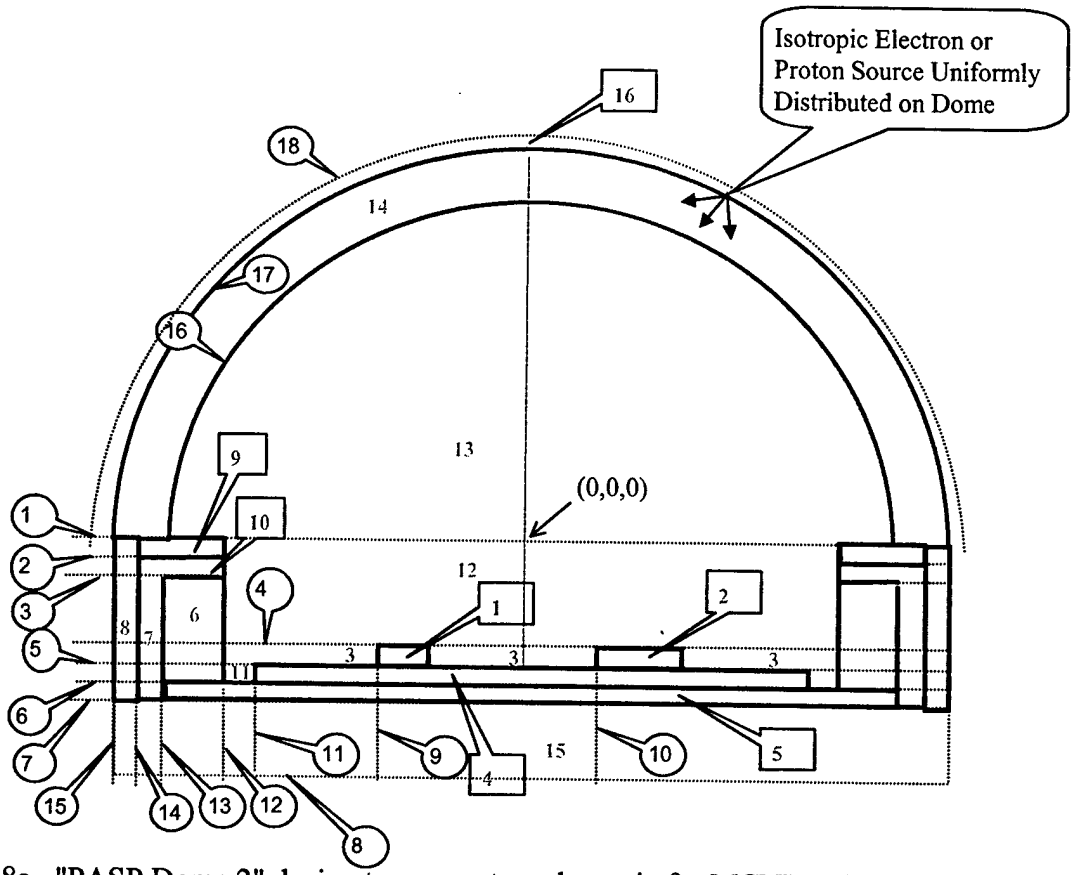

Figure 18a. "PASP Dome 2" dosimeter geometry schematic for MCNPX showing isotropic electron or proton source incident on surface of Al dome; = surfaces; nn = material cells.

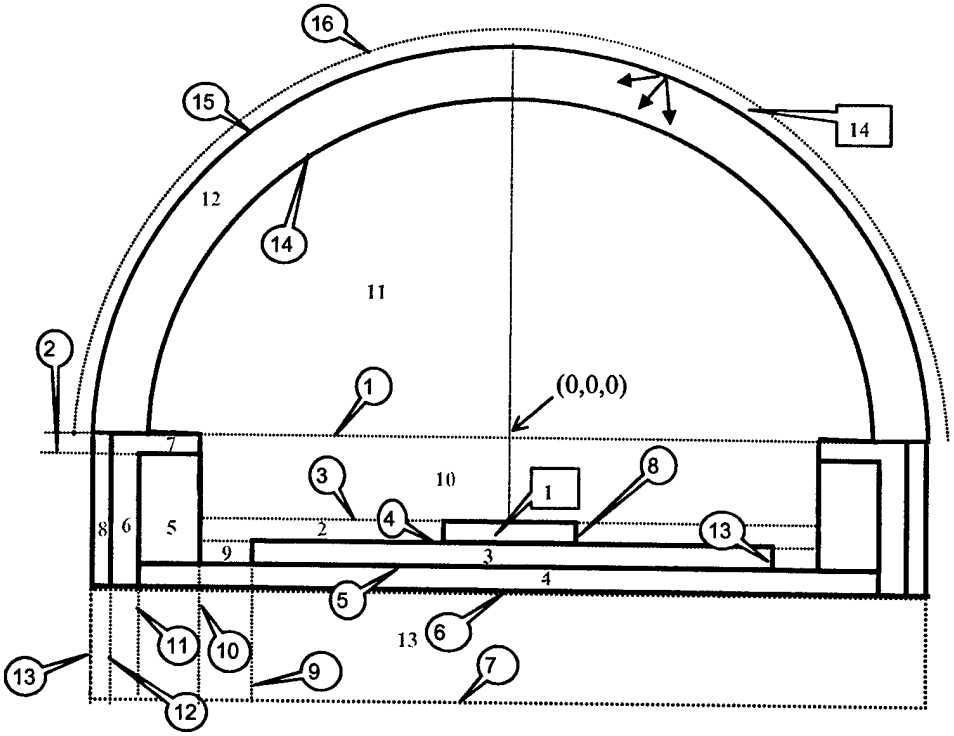

Figure 18b. "PASP Dome 3" dosimeter geometry schematic for MCNPX showing isotropic electron or proton source incident on surface of Al dome; = surfaces; nn = material cells.

In all cases, trial runs were made with small numbers of histories (10000) to check on equivalence of the results obtained with both codes. While the modified version of ITS/ACCEPT was sufficient to accomplish the immediate goals of modeling electron transport, the addition of MCNPX provided: (1) a check on the ITS/ACCEPT results; and (2) a capability for modeling proton transport with the same problem geometries. Electron transport simulations were run at AFRL using the CEASE and PASP dosimeter models described above for several power law electron energy spectra characteristic of the outer belt electron environment. Results are reported in [11].

5. Summary

During the period covered by this report, the technical activity and progress achieved consisted primarily of: (1) modeling of electron transport and calculation of electron energy deposition in silicon dosimeter wafers; (2) construction of a highly detailed ITS-ACCEPT computer model for the HEP sensor, in-flight model; (3) design and installation of enhancements such as expanded source geometry repertoire, single history tracking, and coincidence event recognition capability, to the ITS-ACCEPT transport program; (4) construction of geometry and electron and proton source models for CEASE and PASP dosimeter studies; (5) acquisition and implementation of a three-dimensional geometry construction and visualization program that is compatible with both the ITS and MCNP code series; (6) providing assistance, advice, input data files and computer code enhancements to AFRL for implementation by AFRL research personnel.

We anticipate continuing this and related research efforts by providing simulation calculations and results, computer code enhancements and new geometry models, and by performing in an advisory capacity to the sponsor.

References

1. *ITS - Integrated TIGER Series of Coupled Electron /Photon Monte Carlo Code System*, J. A. Halbleib *et al.* ORNL RSICC Computer Code Package CCC-467.
2. *MCNPX ™ , Version 2.1.5 User's Manual*, L. S. Waters, Ed., Los Alamos Radiation Transport Group(X-6), November 14,1999.
3. *Sabrina 4.15 for Windows*, Copyright 2001, White Rock Science, P.O. Box 4729, White Rock, NM, 87544
4. B. Dichter, *et al.*, Compact Environmental Anomaly Sensor (CEASE): A Novel Spacecraft Instrument for *In Situ* Measurements of Environmental Conditions, *IEEE Trans. Nucl. Sci.* **45(6)**, 2758, Dec. 1998.
5. R. Redus, HEP Flight Model, June 30, 1998, Amptek, Inc., Bedford, MA.
6. D. Brautigam, AFRL/VSBXR, private communication, October 4, 2000.
7. S. Woolf, Installation and Operation of Particle Transport Simulation Programs to Model the Detection and Measurement of Space Radiation by Space-borne Sensors, Air Force Research Laboratory Report AFRL-VS-TR-2001-1605, December 29, 2000.
8. M. S. Gussenhoven, *et al.*, Low altitude orbit edge of the inner radiation belt: Dose models from the APEX satellite, *IEEE Trans. Nucl. Sci.* **42(6)**, 2035, December1995.
9. M. S. Gussenhoven, *et al.*, Low altitude orbit dose as a function of inclination, magnetic activity and solar cycle, *IEEE Trans. Nucl. Sci.* **44(6)**, 2161, December1997.
10. D. Brautigam, AFRL/VSBXR, private communication, May 15, 2001.
11. D. Brautigam *et al.*, Solar cycle variation of outer belt electron dose at low earth orbit, to appear in *IEEE Trans. Nucl. Sci.* **48(6)**, Dec. 2001.

APPENDIX 1

Annotated ITS-ACCEPT Input Data File for the HEP In-Flight Instrument

```
  25 MEV ELECTRON DISK SOURCE - HEP FLIGHT MODEL, FRONT ENTRY, NORMAL INCIDENCE
********************** GEOMETRY ************************
GEOMETRY
*BODIES
*1
  TRC   0.0   0.0   0.0       0.0   0.00000  0.25400       0.6096 0.562396
*2
  RCC   0.0   0.0   0.0       0.0   0.00000  0.25400       0.80010
*3
  RCC   0.0   0.0   0.0       0.0   0.00000  0.25400       1.58877
*4
  RCC   0.0   0.0   0.0       0.0   0.00000  0.25400       2.0955
*5
  TRC   0.0   0.0   0.25400   0.0   0.00000  0.25400       0.562396 0.5151928
*6
  RCC   0.0   0.0   0.25400   0.0   0.00000  0.25400       0.80010
*7
  RCC   0.0   0.0   0.25400   0.0   0.00000  0.25400       2.0955
*8
  TRC   0.0   0.0   0.50800   0.0   0.00000  0.9271        0.5151928 0.3429
*9
  RCC   0.0   0.0   0.50800   0.0   0.00000  0.9271        0.80010
*10
  RCC   0.0   0.0   0.50800   0.0   0.0      0.9271        1.58877
*11
  RCC   0.0   0.0   0.50800   0.0   0.00000  0.9271        2.0955
*12
  RCC   0.0   0.0   1.43510   0.0   0.00000  0.11690       1.58877
*13
  RCC   0.0   0.0   1.43510   0.0   0.00000  0.11690       2.0955
*14
  RCC   0.0   0.0   1.55200   0.0   0.00000  0.05070       1.58877
*15
  RCC   0.0   0.0   1.55200   0.0   0.00000  0.05070       2.0955
*16
  RCC   0.0   0.0   1.60270   0.0   0.00000  0.01274       0.47625
*17
  RCC   0.0   0.0   1.60270   0.0   0.00000  0.01274       1.43510
*18
  RCC   0.0   0.0   1.60270   0.0   0.00000  0.01274       1.58877
*19
  RCC   0.0   0.0   1.60270   0.0   0.00000  0.01274       2.0955
*20
  TRC   0.0   0.0   1.61544   0.0   0.0      0.08128       0.5     0.38000
*21
  RCC   0.0   0.0   1.61544   0.0   0.0      0.08128       0.50000
*22
  RCC   0.0   0.0   1.61544   0.0   0.0      0.08128       0.69850
*23
  RCC   0.0   0.0   1.61544   0.0   0.0      0.08128       1.43510
*24
  RCC   0.0   0.0   1.61544   0.0   0.0      0.08128       1.58877
*25
  RCC   0.0   0.0   1.61544   0.0   0.0      0.08128       2.0955
*26
  TRC   0.0   0.0   1.69672   0.0   0.0      0.06668       0.38000 0.28209
*27
  RCC   0.0   0.0   1.69672   0.0   0.00000  0.06668       0.5
*28
  RCC   0.0   0.0   1.69672   0.0   0.00000  0.06668       0.6350
*29
  RCC   0.0   0.0   1.69672   0.0   0.00000  0.06668       0.6985
*30
  RCC   0.0   0.0   1.69672   0.0   0.00000  0.06668       1.43510
*31
  RCC   0.0   0.0   1.69672   0.0   0.00000  0.06668       1.58877
```

```
*32
  RCC   0.0   0.0   1.69672   0.0   0.00000   0.06668   2.0955
*33
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   0.28209
*34
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   0.30000
*35
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   0.50000
*36
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   0.63500
*37
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   0.69850
*38
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   1.43510
*39
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   1.58877
*40
  RCC   0.0   0.0   1.76340   0.0   0.00000   0.02600   2.09550
*41
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   0.28209
*42
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   0.48200
*43
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   0.50000
*44
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   0.63500
*45
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   0.69850
*46
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   1.43510
*47
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   1.58877
*48
  RCC   0.0   0.0   1.78940   0.0   0.00000   0.00801   2.09550
*49
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   0.48200
*50
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   0.50000
*51
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   0.69850
*52
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   1.43510
*53
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   1.58877
*54
  RCC   0.0   0.0   1.79741   0.0   0.0       0.03400   2.09550
*55
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   0.48200
*56
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   0.50000
*57
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   0.69850
*58
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   1.43510
*59
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   1.58877
*60
  RCC   0.0   0.0   1.83141   0.0   0.0       0.00801   2.09550
*61
  RCC   0.0   0.0   1.83942   0.0   0.0       0.14432   0.50000
*62
  RCC   0.0   0.0   1.83942   0.0   0.0       0.14432   0.69850
*63
  RCC   0.0   0.0   1.83942   0.0   0.0       0.14432   1.43510
*64
  RCC   0.0   0.0   1.83942   0.0   0.0       0.14432   1.58877
*65
  RCC   0.0   0.0   1.83942   0.0   0.0       0.14432   2.09550
*66
  RCC   0.0   0.0   1.98374   0.0   0.0       0.01270   0.47625
*67
```

```
  RCC  0.0     0.0    1.98374    0.0    0.0       0.01270    1.43510
*68
  RCC  0.0     0.0    1.98374    0.0    0.0       0.01270    1.58877
*69
  RCC  0.0     0.0    1.98374    0.0    0.0       0.01270    2.09550
*70
  RCC  0.0     0.0    1.99644    0.0    0.0       0.03810    1.58877
*71
  RCC  0.0     0.0    1.99644    0.0    0.0       0.03810    2.09550
* 72
  RCC      .0     .0    2.03454     .0     .0  .0507000 1.5887700
* 73
  RCC      .0     .0    2.03454     .0     .0  .0507000 2.0955000
* 74
  RCC      .0     .0    2.08524     .0     .0  .0127400  .4762500
* 75
  RCC      .0     .0    2.08524     .0     .0  .0127400 1.4351000
* 76
  RCC      .0     .0    2.08524     .0     .0  .0127400 1.5887700
* 77
  RCC      .0     .0    2.08524     .0     .0  .0127400 2.0955000
* 78
  TRC      .0     .0    2.09798     .0     .0  .0812800  .5000000  .3800000
* 79
  RCC      .0     .0    2.09798     .0     .0  .0812800  .5000000
* 80
  RCC      .0     .0    2.09798     .0     .0  .0812800  .6985000
* 81
  RCC      .0     .0    2.09798     .0     .0  .0812800 1.4351000
* 82
  RCC      .0     .0    2.09798     .0     .0  .0812800 1.5887700
* 83
  RCC      .0     .0    2.09798     .0     .0  .0812800 2.0955000
* 84
  TRC      .0     .0    2.17926     .0     .0  .0666800  .3800000  .2820900
* 85
  RCC      .0     .0    2.17926     .0     .0  .0666800  .5000000
* 86
  RCC      .0     .0    2.17926     .0     .0  .0666800  .6350000
* 87
  RCC      .0     .0    2.17926     .0     .0  .0666800  .6985000
* 88
  RCC      .0     .0    2.17926     .0     .0  .0666800 1.4351000
* 89
  RCC      .0     .0    2.17926     .0     .0  .0666800 1.5887700
* 90
  RCC      .0     .0    2.17926     .0     .0  .0666800 2.0955000
* 91
  RCC      .0     .0    2.24594     .0     .0  .0260000  .2820900
* 92
  RCC      .0     .0    2.24594     .0     .0  .0260000  .3000000
* 93
  RCC      .0     .0    2.24594     .0     .0  .0260000  .5000000
* 94
  RCC      .0     .0    2.24594     .0     .0  .0260000  .6350000
* 95
  RCC      .0     .0    2.24594     .0     .0  .0260000  .6985000
* 96
  RCC      .0     .0    2.24594     .0     .0  .0260000  1.4351000
* 97
  RCC      .0     .0    2.24594     .0     .0  .0260000  1.5887700
* 98
  RCC      .0     .0    2.24594     .0     .0  .0260000  2.0955000
* 99
  RCC      .0     .0    2.27194     .0     .0  .0080100  .2820900
*100
  RCC      .0     .0    2.27194     .0     .0  .0080100  .4820000
*101
  RCC      .0     .0    2.27194     .0     .0  .0080100  .5000000
*102
  RCC      .0     .0    2.27194     .0     .0  .0080100  .6350000
```

```
*103
  RCC     .0    .0    2.27194    .0    .0   .0080100   .6985000
*104
  RCC     .0    .0    2.27194    .0    .0   .0080100   1.4351000
*105
  RCC     .0    .0    2.27194    .0    .0   .0080100   1.5887700
*106
  RCC     .0    .0    2.27194    .0    .0   .0080100   2.0955000
*107
  RCC     .0    .0    2.27995    .0    .0   .0340000   .4820000
*108
  RCC     .0    .0    2.27995    .0    .0   .0340000   .5000000
*109
  RCC     .0    .0    2.27995    .0    .0   .0340000   .6985000
*110
  RCC     .0    .0    2.27995    .0    .0   .0340000   1.4351000
*111
  RCC     .0    .0    2.27995    .0    .0   .0340000   1.5887700
*112
  RCC     .0    .0    2.27995    .0    .0   .0340000   2.0955000
*113
  RCC     .0    .0    2.31395    .0    .0   .0080100   .4820000
*114
  RCC     .0    .0    2.31395    .0    .0   .0080100   .5000000
*115
  RCC     .0    .0    2.31395    .0    .0   .0080100   .6985000
*116
  RCC     .0    .0    2.31395    .0    .0   .0080100   1.4351000
*117
  RCC     .0    .0    2.31395    .0    .0   .0080100   1.5887700
*118
  RCC     .0    .0    2.31395    .0    .0   .0080100   2.0955000
*119
  RCC     .0    .0    2.32196    .0    .0   .1443200   .5000000
*120
  RCC     .0    .0    2.32196    .0    .0   .1443200   .6985000
*121
  RCC     .0    .0    2.32196    .0    .0   .1443200   1.4351000
*122
  RCC     .0    .0    2.32196    .0    .0   .1443200   1.5887700
*123
  RCC     .0    .0    2.32196    .0    .0   .1443200   2.0955000
*124
  RCC     .0    .0    2.46628    .0    .0   .0127000   .4762500
*125
  RCC     .0    .0    2.46628    .0    .0   .0127000   1.4351000
*126
  RCC     .0    .0    2.46628    .0    .0   .0127000   1.5887700
*127
  RCC     .0    .0    2.46628    .0    .0   .0127000   2.0955000
*128
  RCC     .0    .0    2.47898    .0    .0   .0507600   1.5887700
*129
  RCC     .0    .0    2.47898    .0    .0   .0507600   2.0955000
*130
  RCC     .0    .0    2.52974    .0    .0   .0508400   0.75057
*131
  RCC     .0    .0    2.52974    .0    .0   .0508400   0.94615
*132
  RCC     .0    .0    2.52974    .0    .0   .0508400   1.45415
*133
  RCC     .0    .0    2.52974    .0    .0   .0508400   1.58877
*134
  RCC     .0    .0    2.52974    .0    .0   .0508400   2.0955
*135
  RCC     .0    .0    2.58058    .0    .0   3.0        0.75057
*136
  RCC     .0    .0    2.58058    .0    .0   3.0        0.94615
*137
  RCC     .0    .0    2.58058    .0    .0   3.0        1.45415
*138
```

```
  RCC     .0    .0    2.58058    .0    .0  3.0         1.58877
*139
  RCC     .0    .0    2.58058    .0    .0  3.0         2.0955
*140
  RCC     .0    .0    5.58058    .0    .0  0.05060     0.75057
*141
  RCC     .0    .0    5.58058    .0    .0  0.05060     0.94615
*142
  RCC     .0    .0    5.58058    .0    .0  0.05060     1.45415
*143
  RCC     .0    .0    5.58058    .0    .0  0.05060     1.58877
*144
  RCC     .0    .0    5.58058    .0    .0  0.05060     2.0955
*145
  RCC     .0    .0    5.63118    .0    .0  0.05080     1.58877
*146
  RCC     .0    .0    5.63118    .0    .0  0.05080     2.0955
*147
  RCC     .0    .0    5.68198    .0    .0  0.01270     1.4351
*148
  RCC     .0    .0    5.68198    .0    .0  0.01270     1.58877
*149
  RCC     .0    .0    5.68198    .0    .0  0.01270     2.0955
*150
  TRC     .0    .0    5.69468    .0    .0  0.02742     0.71664  0.690
*151
  RCC     .0    .0    5.69468    .0    .0  0.02742     1.1050
*152
  RCC     .0    .0    5.69468    .0    .0  0.02742     1.4351
*153
  RCC     .0    .0    5.69468    .0    .0  0.02742     1.58877
*154
  RCC     .0    .0    5.69468    .0    .0  0.02742     2.0955
*155
  RCC     .0    .0    5.72210    .0    .0  0.02740     0.690
*156
  RCC     .0    .0    5.72210    .0    .0  0.02740     1.1050
*157
  RCC     .0    .0    5.72210    .0    .0  0.02740     1.4351
*158
  RCC     .0    .0    5.72210    .0    .0  0.02740     1.58877
*159
  RCC     .0    .0    5.72210    .0    .0  0.02740     2.0955
*160
  RCC     .0    .0    5.74950    .0    .0  0.081830    0.74334
*161
  RCC     .0    .0    5.74950    .0    .0  0.081830    0.82335
*162
  RCC     .0    .0    5.74950    .0    .0  0.081830    1.1050
*163
  RCC     .0    .0    5.74950    .0    .0  0.081830    1.4351
*164
  RCC     .0    .0    5.74950    .0    .0  0.081830    1.58877
*165
  RCC     .0    .0    5.74950    .0    .0  0.081830    2.0955
*166
  RCC     .0    .0    5.83133    .0    .0  0.070610    0.82335
*167
  RCC     .0    .0    5.83133    .0    .0  0.070610    1.0
*168
  RCC     .0    .0    5.83133    .0    .0  0.070610    1.1050
*169
  RCC     .0    .0    5.83133    .0    .0  0.070610    1.4351
*170
  RCC     .0    .0    5.83133    .0    .0  0.070610    1.58877
*171
  RCC     .0    .0    5.83133    .0    .0  0.070610    2.0955
*172
  RCC     .0    .0    5.90194    .0    .0  0.017560    0.74334
*173
  RCC     .0    .0    5.90194    .0    .0  0.017560    0.82335
```

```
*174
  RCC     .0    .0    5.90194    .0    .0   0.017560  1.0
*175
  RCC     .0    .0    5.90194    .0    .0   0.017560  1.1050
*176
  RCC     .0    .0    5.90194    .0    .0   0.017560  1.4351
*177
  RCC     .0    .0    5.90194    .0    .0   0.017560  1.58877
*178
  RCC     .0    .0    5.90194    .0    .0   0.017560  2.0955
*179
  RCC     .0    .0    5.91950    .0    .0   0.061620  0.74334
*180
  RCC     .0    .0    5.91950    .0    .0   0.061620  0.82335
*181
  RCC     .0    .0    5.91950    .0    .0   0.061620  1.0
*182
  RCC     .0    .0    5.91950    .0    .0   0.061620  1.1050
*183
  RCC     .0    .0    5.91950    .0    .0   0.061620  1.4351
*184
  RCC     .0    .0    5.91950    .0    .0   0.061620  1.58877
*185
  RCC     .0    .0    5.91950    .0    .0   0.061620  2.0955
*186
  RCC     .0    .0    5.98112    .0    .0   0.048870  0.690
*187
  RCC     .0    .0    5.98112    .0    .0   0.048870  1.0
*188
  RCC     .0    .0    5.98112    .0    .0   0.048870  1.1050
*189
  RCC     .0    .0    5.98112    .0    .0   0.048870  1.4351
*190
  RCC     .0    .0    5.98112    .0    .0   0.048870  1.58877
*191
  RCC     .0    .0    5.98112    .0    .0   0.048870  2.0955
*192
  TRC     .0    .0    6.02999    .0    .0   0.08865    0.69    .74334
*193
  RCC     .0    .0    6.02999    .0    .0   0.088650  1.0
*194
  RCC     .0    .0    6.02999    .0    .0   0.088650  1.1050
*195
  RCC     .0    .0    6.02999    .0    .0   0.088650  1.4351
*196
  RCC     .0    .0    6.02999    .0    .0   0.088650  1.58877
*197
  RCC     .0    .0    6.02999    .0    .0   0.088650  2.0955
*198
  RCC     .0    .0    6.11864    .0    .0   0.01270   1.4351
*199
  RCC     .0    .0    6.11864    .0    .0   0.01270   1.58877
*200
  RCC     .0    .0    6.11864    .0    .0   0.01270   2.0955
*201
  RCC     .0    .0    6.13134    .0    .0   0.05088   1.58877
*202
  RCC     .0    .0    6.13134    .0    .0   0.05088   2.0955
*203
  RCC     .0    .0    6.18222    .0    .0   0.05072   1.0
*204
  RCC     .0    .0    6.18222    .0    .0   0.05072   1.58877
*205
  RCC     .0    .0    6.18222    .0    .0   0.05072   2.0955
*206
  RCC     .0    .0    6.23294    .0    .0   2.0       1.0
*207
  RCC     .0    .0    6.23294    .0    .0   2.0       1.58877
*208
  RCC     .0    .0    6.23294    .0    .0   2.0       2.0955
*209
```

```
  RCC     .0    .0    8.23294     .0    .0  0.05080   1.0
*210
  RCC     .0    .0    8.23294     .0    .0  0.05080   1.58877
*211
  RCC     .0    .0    8.23294     .0    .0  0.05080   2.0955
*212
  RCC     .0    .0    8.28374     .0    .0  0.05080   1.58877
*213
  RCC     .0    .0    8.28374     .0    .0  0.05080   2.0955
*214
  RCC     .0    .0    8.33454     .0    .0  0.01270   1.4351
*215
  RCC     .0    .0    8.33454     .0    .0  0.01270   1.58877
*216
  RCC     .0    .0    8.33454     .0    .0  0.01270   2.0955
*217
  TRC     .0    .0    8.34724     .0    .0  0.02743   1.0      0.975
*218
  RCC     .0    .0    8.34724     .0    .0  0.02743   1.4351
*219
  RCC     .0    .0    8.34724     .0    .0  0.02743   1.58877
*220
  RCC     .0    .0    8.34724     .0    .0  0.02743   2.0955
*221
  RCC     .0    .0    8.37467     .0    .0  0.02743   0.975
*222
  RCC     .0    .0    8.37467     .0    .0  0.02743   1.4351
*223
  RCC     .0    .0    8.37467     .0    .0  0.02743   1.58877
*224
  RCC     .0    .0    8.37467     .0    .0  0.02743   2.0955
*225
  RCC     .0    .0    8.40210     .0    .0  0.08179   1.02834
*226
  RCC     .0    .0    8.40210     .0    .0  0.08179   1.10835
*227
  RCC     .0    .0    8.40210     .0    .0  0.08179   1.4351
*228
  RCC     .0    .0    8.40210     .0    .0  0.08179   1.58877
*229
  RCC     .0    .0    8.40210     .0    .0  0.08179   2.0955
*230
  RCC     .0    .0    8.48389     .0    .0  0.07061   1.10835
*231
  RCC     .0    .0    8.48389     .0    .0  0.07061   1.32319
*232
  RCC     .0    .0    8.48389     .0    .0  0.07061   1.4351
*233
  RCC     .0    .0    8.48389     .0    .0  0.07061   1.58877
*234
  RCC     .0    .0    8.48389     .0    .0  0.07061   2.0955
*235
  RCC     .0    .0    8.55450     .0    .0  0.01753   1.02834
*236
  RCC     .0    .0    8.55450     .0    .0  0.01753   1.10835
*237
  RCC     .0    .0    8.55450     .0    .0  0.01753   1.32319
*238
  RCC     .0    .0    8.55450     .0    .0  0.01753   1.4351
*239
  RCC     .0    .0    8.55450     .0    .0  0.01753   1.58877
*240
  RCC     .0    .0    8.55450     .0    .0  0.01753   2.0955
*241
  RCC     .0    .0    8.57203     .0    .0  0.05309   1.02834
*242
  RCC     .0    .0    8.57203     .0    .0  0.05309   1.10835
*243
  RCC     .0    .0    8.57203     .0    .0  0.05309   1.32319
*244
  RCC     .0    .0    8.57203     .0    .0  0.05309   1.4351
```

```
*245
  RCC     .0     .0    8.57203     .0     .0  0.05309    1.58877
*246
  RCC     .0     .0    8.57203     .0     .0  0.05309    2.0955
*247
  RCC     .0     .0    8.62512     .0     .0  0.03987    0.975
*248
  RCC     .0     .0    8.62512     .0     .0  0.03987    1.32319
*249
  RCC     .0     .0    8.62512     .0     .0  0.03987    1.4351
*250
  RCC     .0     .0    8.62512     .0     .0  0.03987    1.58877
*251
  RCC     .0     .0    8.62512     .0     .0  0.03987    2.0955
*252
  TRC     .0     .0    8.66499     .0     .0  0.08865    0.975  1.02834
*253
  RCC     .0     .0    8.66499     .0     .0  0.08865    1.32319
*254
  RCC     .0     .0    8.66499     .0     .0  0.08865    1.4351
*255
  RCC     .0     .0    8.66499     .0     .0  0.08865    1.58877
*256
  RCC     .0     .0    8.66499     .0     .0  0.08865    2.0955
*257
  RCC     .0     .0    8.75364     .0     .0  0.01270    1.4351
*258
  RCC     .0     .0    8.75364     .0     .0  0.01270    1.58877
*259
  RCC     .0     .0    8.75364     .0     .0  0.01270    2.0955
*260
  RCC     .0     .0    8.76634     .0     .0  0.05080    1.58877
*261
  RCC     .0     .0    8.76634     .0     .0  0.05080    2.0955
*262
  RCC     .0     .0    8.81414     .0     .0  0.06604    0.9525
*263
  RCC     .0     .0    8.81414     .0     .0  0.06604    1.58877
*264
  RCC     .0     .0    8.81414     .0     .0  0.06604    2.0955
*265
  RCC     .0     .0    8.88018     .0     .0  0.33180    1.270
*266
  RCC     .0     .0    8.88018     .0     .0  0.33180    1.58877
*267
  RCC     .0     .0    8.88018     .0     .0  0.33180    2.0955
*268
  RCC     .0     .0    9.21198     .0     .0  0.69402    2.0955
*269
  RPP  0.4788   0.6574       -0.5780189      0.5780189  2.61874  4.0665
*270
  RPP  0.4788   0.75057      -0.5780189      0.5780189 2.58058   4.1064
*271
  RPP  0.75057  0.94615      -0.5780189      0.5780189  2.58058  4.1064
*272
  RPP  1.18237  1.36097      -.635   .635    3.380564   4.82854
*273
  RPP  1.18237  1.45415      -.635   .635    3.342464   4.86664
*27
  RPP  1.45415  1.58877      -.635   .635    3.342464   4.86664
*275
  RPP  0.94615  1.0          -.635   .635    6.25348    7.70128
*276
  RPP  0.94615  1.0          -.635   .635    6.23294    6.25348
*277
  RPP  0.94615  1.0          -.635   .635    7.70128    7.73938
*278
  RPP  1.0      1.12475      -.635   .635    6.25348    7.70128
*279
  RPP  1.0      1.12475      -.635   .635    6.23294    6.25348
*280
```

```
  RPP  1.0       1.12475  -.635    .635         6.25348  7.73938
*281
  RPP  1.12475   1.456353 -.635    .635         6.23294  7.73938
*282
  RPP  1.456353  1.58877  -.635    .635         6.23294  7.73938
*283
  RPP  1.584653  1.58877  -.1143   .1143        0.5080   8.88018
*28
  RPP  1.58877   1.8415    -.1143   .1143        0.5080   8.88018
*285
  RCC  .0        .0       10.16    .0       .0   0.3175   2.921
 *286
  RPP  -2.794    4.064    -3.9624  3.9624       10.16     10.4775
*287
  RPP   -2.921  -2.667   -1.191365 1.191365     10.16     10.4775
*288
  RPP   -2.159   4.064   -3.9624   3.9624       9.906     10.16
*289
  RPP  -2.159    4.064    -3.9624   3.9624       0.0       0.254
*290
  RPP   4.064    4.318    -3.9624   3.9624       0.0       10.16
*291
  RPP  -2.794   -2.159    -3.9624   3.9624       0.0       10.16
*292
  RPP  -2.159    4.064     -3.7084   3.9624       0.254     9.906
*293
  RPP  -2.159    4.064     -3.9624  -3.7084       0.254     9.906
*294
  RPP  -2.159    4.064     -3.7084   3.70840      0.254     9.906
*295
  RCC   0.       0.         9.906    0.           0.        0.254        2.0955
*296
  RPP  4.318     5.318    -3.9624   3.9624       0.0      10.4775
*297
  RPP  -3.794   -2.794     -3.9624   3.9624   0.0 10.4775
*298
  RPP  -3.794    5.318     -3.9624   3.9624  -1.0          0.0
*299
  RPP  -3.794    5.318     -3.9624   3.9624   10.4775      11.4775
*300
  RPP  -3.794    5.318     -4.9624  -3.9624   -1.0         11.4775
*301
  RPP  -3.794    5.318      3.9624   4.9624   -1.0         11.4775
*302
  RPP   -1.524   -0.016     3.7084   3.9624    1.508125    8.611575
*303
  RPP   -1.5748 -0.9398  -3.9624  -3.7084   3.889375     6.270625
*304
  RCC  1.8415           0.0      1.6764           0.260   0. 0. 0.08
*305
  RCC  1.8415           0.0      1.6764           0.260   0. 0. 0.08
*306
  RCC  1.8415           0.0      2.21488          0.260   0. 0. 0.08
*307
  RCC  1.8415           0.0      2.46888          0.260   0. 0. 0.08
*308
  RCC  1.8415           0.0      3.01752          0.260   0. 0. 0.08
*309
  RCC  1.8415           0.0      3.27152          0.260   0. 0. 0.08
*310
  RCC  1.8415           0.0      4.21986          0.260   0. 0. 0.08
*311
  RCC  1.8415           0.0      4.46786          0.260   0. 0. 0.08
*312
  RCC  1.8415           0.0      5.88010          0.260   0. 0. 0.08
*313
  RCC  1.8415           0.0      6.13410          0.260   0. 0. 0.08
*314
  RCC  1.8415           0.0      7.01294          0.260   0. 0. 0.08
*315
  RCC  1.8415           0.0      7.26694          0.260   0. 0. 0.08
```

```
*316
  RCC  1.8415          0.0     8.54456         0.260  0. 0. 0.08
*317
  RCC  1.8415          0.0     8.79956         0.260  0. 0. 0.08
*318
  SPH  0.0             0.0     5.0             15.0
  END
*\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\

*ZONES
*collimator aperture
  Z01 +1
*Tungsten P17
  Z02 +2 -1
*Tungsten P17
  Z03 +3 -1 -2
*Void
  Z04 +4 -1 -2 -3
* collimator aperture
  Z05 +5
*Tungsten P17
  Z06 +6 -5
*Copper P16
  Z07 +7 -6 -5
*    collimator aperture
  Z08 +8
*Tungsten P17
  Z09 +9 -8
*Copper P16
  Z10 +10 -8 -9 -283
*Copper case cylinder
  Z11 +11 -10 -9 -8 -283 -284
*Copper P16
  Z12 +12  -283
*Copper case cylinder
  Z13 +13 -12 -283 -284
*Plastic  Kel-F  P4
  Z14 +14  -283
*Copper case cylinder
  Z15 +15 -14  -283 -284
*
*D1 Assembly starts here
*
*Void  P9
  Z16 +16
*Phosphor Bronze P9
  Z17 +17 -16
*Plastic  Kel-F  P4
  Z18 +18 -17 -16  -283
*Copper case cylinder
  Z19 +19 -18 -17 -16 -283 -284
*Void
  Z20 +20
*PCB Ring mount
  Z21 +21 -20
  Z22 +22 -21 -20
*Plastic  Kel-F  P8
  Z23 +23 -22 -21 -20
*Plastic  Kel-F  P4
  Z24 +24 -23 -22 -21 -20 -283
*Copper case cylinder
  Z25 +25 -24 -23 -22 -21 -20 -283 -284
*void
  Z26 +26
*PCB Ring mount
  Z27 +27 -26
  Z28 +28 -27 -26
  Z29 +29 -28 -27 -26
*
*
*Plastic  Kel-F  P8
```

Two-column format used on this and the following five pages to conserve space. Actual file format is single-column.

```
  Z30 +30 -29 -28 -27 -26
*Plastic  Kel-F  P4
  Z31 +31 -30 -29 -28 -27 -26 -283
*Copper case cylinder
  Z32 +32 -31 -30 -29 -28 -27 -26 -283 -284
*void
  Z33 +33
*Rubber wafer mount
  Z34 +34 -33
*void
  Z35 +35 -34 -33
*PCB Ring mount
  Z36 +36 -35 -34 -33
  Z37 +37 -36 -35 -34 -33
*Plastic  Kel-F  P8
  Z38 +38 -37 -36 -35 -34 -33
*
*Plastic  Kel-F  P4
  Z39 +39 -38 -37 -36 -35 -34 -33 -283
*Copper case cylinder
  Z40 +40 -39 -38 -37 -36 -35 -34 -33 -283 -
284
*Aluminum coating on Si wafer
  Z41 +41
*Oxide ring
  Z42 +42 -41
```

```
*void
  Z43 +43 -42 -41
*PCB Ring mount
  Z44 +44 -43 -42 -41
  Z45 +45 -44 -43 -42 -41
*Plastic  Kel-F  P8
  Z46 +46 -45 -44 -43 -42 -41
*Plastic  Kel-F  P4
  Z47 +47 -46 -45 -44 -43 -42 -41 -283
*Copper case cylinder
  Z48 +48 -47 -46 -45 -44 -43 -42 -41 -283 -284
*    Silicon wafer
  Z49 +49
*    void
  Z50 +50 -49
*PCB Ring mount
  Z51 +51 -50 -49
*Plastic  Kel-F  P8
  Z52 +52 -51 -50 -49
*Plastic  Kel-F  P4
  Z53 +53 -52 -51 -50 -49 -283
*Copper case cylinder
  Z54 +54 -53 -52 -51 -50 -49  -283 -284
*Aluminum coating on Si wafer
  Z55 +55
*void
  Z56 +56 -55
*PCB Ring mount
  Z57 +57 -56 -55
*Plastic  Kel-F  P8
  Z58 +58 -57 -56 -55
*Plastic  Kel-F  P4
  Z59 +59 -58 -57 -56 -55 -283
*Copper case cylinder
  Z60 +60 -59 -58 -57 -56 -55  -283  -284
*void
  Z61 +61
*PCB Ring mount
  Z62 +62 -61
*Plastic  Kel-F  P8
  Z63 +63 -62 -61
*Plastic  Kel-F  P4
  Z64 +64 -63 -62 -61 -283
*Copper case cylinder
  Z65 +65 -64 -63 -62 -61 -283 -284
*void
  Z66 +66
*
*End of D1 Assembly
*
*Phosphor Bronze P9
  Z67 +67 -66
*Plastic  Kel-F  P4
  Z68 +68 -67 -66 -283
*Copper case cylinder
  Z69 +69 -68 -67 -66  -283 -284
*    Plastic  Kel-F  P6
  Z70 +70 -283
*Copper case cylinder
  Z71 +71 -70  -283 -284
*
*Start of D2 Assembly
*
*Plastic  Kel-F  P4
  Z72   +72   -283
*Copper case cylinder
  Z73   +73  -72 -283 -284
*Void  P9
  Z74   +74
*Phosphor Bronze P9
  Z75   +75  -74
*Plastic  Kel-F  P4
  Z76   +76  -75  -74 -283
*Copper case cylinder
  Z77   +77  -76  -75  -74 -283 -284
*Void
  Z78   +78
*PCB Ring mount
  Z79   +79  -78
  Z80   +80  -79  -78
*Plastic  Kel-F  P8
  Z81   +81  -80  -79  -78
*Plastic  Kel-F  P4
  Z82   +82  -81  -80  -79  -78 -283
*Copper case cylinder
  Z83   +83  -82  -81  -80  -79  -78 -283 -284
*void
  Z84   +84
*PCB Ring mount
  Z85   +85  -84
  Z86   +86  -85  -84
  Z87   +87  -86  -85  -84
*Plastic  Kel-F  P8
  Z88   +88  -87  -86  -85  -84
*Plastic  Kel-F  P4
  Z89   +89  -88  -87  -86  -85  -84  -283
*Copper case cylinder
  Z90   +90  -89  -88  -87  -86  -85  -84  -
283  -284
*void
  Z91   +91
*Rubber wafer mount
  Z92   +92  -91
*void
  Z93   +93  -92  -91
*PCB Ring mount
  Z94   +94  -93  -92  -91
  Z95   +95  -94  -93  -92  -91
*Plastic  Kel-F  P8
  Z96   +96  -95  -94  -93  -92  -91
*Plastic  Kel-F  P4
  Z97   +97  -96  -95  -94  -93  -92  -91 -283
*Copper case cylinder
  Z98   +98  -97  -96  -95  -94  -93  -92  -91
-283 -284
*Aluminum coating on Si wafer
  Z99   +99
*Oxide ring
  Z100  +100  -99
*void
  Z101  +101 -100  -99
*PCB Ring mount
  Z102  +102 -101 -100  -99
  Z103  +103 -102 -101 -100  -99
*Plastic  Kel-F  P8
  Z104  +104 -103 -102 -101 -100  -99
*Plastic  Kel-F  P4
  Z105  +105 -104 -103 -102 -101 -100  -99   -
283
*Copper case cylinder
  Z106  +106 -105 -104 -103 -102 -101 -100  -
99 -283 -284
*    Silicon wafer
  Z107  +107
*    void
  Z108  +108 -107
*PCB Ring mount
  Z109  +109 -108 -107
*Plastic  Kel-F  P8
  Z110  +110 -109 -108 -107
*Plastic  Kel-F  P4
  Z111  +111 -110 -109 -108 -107  -283
```

```
*Copper case cylinder
  Z112  +112 -111 -110 -109 -108 -107  -283 -
284
*Aluminum coating on Si wafer
  Z113  +113
*void
  Z114  +114 -113
*PCB Ring mount
  Z115  +115 -114 -113
*Plastic  Kel-F  P8
  Z116  +116 -115 -114 -113
*Plastic  Kel-F  P4
  Z117  +117 -116 -115 -114 -113 -283
*Copper case cylinder
  Z118  +118 -117 -116 -115 -114 -113 -283 -284
*void
  Z119  +119
*PCB Ring mount
  Z120  +120 -119
*Plastic  Kel-F  P8
  Z121  +121 -120 -119
*Plastic  Kel-F  P4
  Z122  +122 -121 -120 -119  -283
*Copper case cylinder
  Z123  +123 -122 -121 -120 -119  -283 -284
*void
  Z124  +124
*Phosphor Bronze P9
  Z125  +125 -124
*
*    end of D2 assembly
*
*    start of S1, S3 assembly
*
*Plastic  Kel-F  P4
  Z126  +126 -125 -124  -283
*Copper case cylinder
  Z127  +127 -126 -125 -124 -283 -284
*    Plastic  Kel-F  P6
  Z128  +128  -283
*Copper case cylinder
  Z129  +129 -128 -283  -284
*    Plastic  Kel-F  P5
  Z130  +130
* Spectralon P13, P14
  Z131  +131 -130
*    Plastic  Kel-F  P5
  Z132  +132 -131 -130
* Spectralon P13, P14
  Z133  +133 -132 -131 -130  -283
*Copper case cylinder
  Z134  +134 -133 -132 -131 -130 -283   -284
* GSO S1 (will add pin diode later)
  Z135 +135 -269  -270
* Spectralon P13, P14
  Z136  +136 -135  -269 -270 -271
*Plastic Scintillator S3 with pin diode hole
  Z137  +137 -136 -135 -272 -273 -274
* Spectralon P13, P14 with pin diode hole
  Z138  +138 -137 -136 -135 -272 -273 -274 -283
*Copper case cylinder
  Z139  +139 -138 -137 -136 -135 -283 -284
*    Plastic  Kel-F  P5
  Z140  +140
* Spectralon P13, P14
  Z141  +141 -140
*    Plastic  Kel-F  P5
  Z142  +142 -141 -140
* Spectralon P13, P14
  Z143  +143 -142 -141 -140 -283
*Copper case cylinder
  Z144  +144 -143 -142 -141 -140 -283 -284
*    Plastic  Kel-F  P5
  Z145  +145   -283
*Copper case cylinder
  Z146  +146 -145  -283  -284
*
*End of S3, S1 Assembly
*
*Start D3 Assembly
*
* Phosphor Bronze  P9B
  Z147  +147
*Plastic  Kel-F  P5
  Z148  +148 -147  -283
*Copper case cylinder
  Z149  +149 -148 -147  -283 -284
*Void
  Z150  +150
*PCB annulus
  Z151  +151 -150
*Plastic  Kel-F  P7
  Z152  +152 -151 -150
*Plastic  Kel-F  P5,P6
  Z153  +153 -152 -151 -150  -283
*Copper case cylinder
  Z154  +154 -153 -152 -151 -150  -283  -284
*Void
  Z155  +155
*PCB annulus
  Z156  +156 -155
*Plastic  Kel-F  P7
  Z157  +157 -156 -155
*Plastic  Kel-F  P5,P6
  Z158  +158 -157 -156 -155 -283
*Copper case cylinder
  Z159  +159 -158 -157 -156 -155 -283  -284
*Void
  Z160  +160

*Rubber mounting spacer
  Z161  +161 -160
*PMMA
  Z162  +162 -161 -160
*Plastic  Kel-F  P7
  Z163  +163 -162 -161 -160
*Plastic  Kel-F  P5,P6
  Z164  +164 -163 -162 -161 -160  -283
*Copper case cylinder
  Z165  +165 -164 -163 -162 -161 -160 -283 -
284
*Si wafer - electrically active part
  Z166 +166
*Si wafer - electrically inactive part
  Z167 +167 -166
*PMMA
  Z168  +168 -167 -166
*Plastic  Kel-F  P7
  Z169  +169 -168 -167 -166
*Plastic  Kel-F  P5,P6
  Z170  +170 -169 -168 -167 -166 -283
*Copper case cylinder
  Z171  +171 -170 -169 -168 -167 -166  -283 -
284
*Void
  Z172  +172
*Rubber mounting spacer
  Z173  +173 -172
*Void
  Z174  +174 -173 -172
*PMMA
  Z175  +175 -174 -173 -172
```

```
*Plastic  Kel-F  P7
  Z176  +176 -175 -174 -173 -172
*Plastic  Kel-F  P5,P6
  Z177  +177 -176 -175 -174 -173 -172 -283
*Copper case cylinder
  Z178  +178 -177 -176 -175 -174 -173 -172 -283
-284
*Void
  Z179  +179
*Rubber mounting spacer
  Z180  +180 -179
*PMMA
  Z181  +181 -180 -179
*PMMA
  Z182  +182 -181 -180 -179
*Plastic  Kel-F  P7
  Z183  +183 -182 -181 -180 -179
*Plastic  Kel-F  P5,P6
  Z184  +184 -183 -182 -181 -180 -179   -283
*Copper case cylinder
  Z185  +185 -184 -183 -182 -181 -180 -179 -283
-284
*Void
  Z186  +186
*PCB annulus
  Z187  +187 -186
*PMMA
  Z188  +188 -187 -186
*Plastic  Kel-F  P7
  Z189  +189 -188 -187 -186
*Plastic  Kel-F  P5,P6
  Z190  +190 -189 -188 -187 -186  -283
*Copper case cylinder
  Z191  +191 -190 -189 -188 -187 -186 -283 -284
*Void
  Z192  +192
*PCB annulus
  Z193  +193 -192
*PMMA
  Z194  +194 -193 -192
*Plastic  Kel-F  P7
  Z195  +195 -194 -193 -192
*Plastic  Kel-F  P5,P6
  Z196  +196 -195 -194 -193 -192 -283
*Copper case cylinder
  Z197  +197 -196 -195 -194 -193 -192 -283 -284
*Phosphor bronze  P9B
  Z198  +198
*Plastic  Kel-F  P5,P6
  Z199  +199 -198  -283
*Copper case cylinder
  Z200  +200 -199 -198  -283  -284
*Plastic  Kel-F  P6
  Z201  +201  -283
*Copper case cylinder
  Z202  +202 -201 -283 -284
*
*End D3 Assembly
*
*Begin S2 Assembly
*
*Plastic  Kel-F  P4
  Z203  +203
*Spectralon P12
  Z204  +204 -203 -283
*Copper case cylinder
  Z205  +205 -204 -203 -283  -284
*GSO S2
  Z206  +206  -275 -276 -277
*Spectralon P12
  Z207  +207 -206 -275 -276 -277 -278 -279 -
280 -281 -282  -283
*Copper case cylinder
  Z208  +208 -207 -206 -283 -284
*Plastic  Kel-F  P6
  Z209  +209
*Spectralon P12
  Z210  +210 -209  -283
*Copper case cylinder
  Z211  +211 -210 -209 -283 -284
*
*end S2 assembly
*begin D4 assembly
*
*Plastic  Kel-F  P6
  Z212  +212   -283
*Copper case cylinder
  Z213  +213 -212  -283
*Phosphor bronze  P9B
  Z214  +214
*Plastic  Kel-F     P6
  Z215  +215 -214  -283
*Copper case cylinder
  Z216  +216 -215 -214 -283 -284
*Void
  Z217  +217
*PCB annulus
  Z218  +218 -217
*Plastic  Kel-F     P6
  Z219  +219 -218 -217 -283
*Copper case cylinder
  Z220  +220 -219 -218 -217 -283 -284
*Void
  Z221  +221
*PCB annulus
  Z222  +222 -221
*Plastic  Kel-F     P6
  Z223  +223 -222 -221 -283
*Copper case cylinder
  Z224  +224 -223 -222 -221 -283  -284
*Void
  Z225  +225
*Rubber mounting spacer
  Z226  +226 -225
*PMMA
  Z227  +227 -226 -225
*Plastic  Kel-F     P6
  Z228  +228 -227 -226 -225 -283
*Copper case cylinder
  Z229  +229 -228 -227 -226 -225 -283 -284
*Si wafer - electrically active part
  Z230 +230
*Si wafer - electrically inactive part
  Z231 +231 -230
*PMMA
  Z232  +232 -231 -230
*Plastic  Kel-F     P6
  Z233  +233 -232 -231 -230  -283
*Copper case cylinder
  Z234  +234 -233 -232 -231 -230 -283  -284
*Void
  Z235  +235
*Rubber mounting spacer
  Z236  +236 -235
*Void
  Z237  +237 -236 -235
*PMMA
  Z238  +238 -237 -236 -235
*Plastic  Kel-F     P6
  Z239  +239 -238 -237 -236 -235  -283
*Copper case cylinder
```

```
  Z240  +240 -239 -238 -237 -236 -235 -283  -
284
*Void
  Z241  +241
*Rubber mounting spacer
  Z242  +242 -241
*PCB annulus
  Z243  +243 -242 -241
*PMMA
  Z244  +244 -243 -242 -241
*Plastic  Kel-F     P6
  Z245  +245 -244 -243 -242 -241 -283
*Copper case cylinder
  Z246  +246 -245 -244 -243 -242 -241 -283  -
284
*Void
  Z247  +247
*PCB annulus
  Z248  +248 -247
*PMMA
  Z249  +249 -248 -247
*Plastic  Kel-F     P6
  Z250  +250 -249 -248 -247 -283
*Copper case cylinder
  Z251  +251 -250 -249 -248 -247 -283  -284
*Void
  Z252  +252
*PCB annulus
  Z253  +253 -252
*PMMA
  Z254  +254 -253 -252
*Plastic  Kel-F     P6
  Z255  +255 -254 -253 -252  -283
*Copper case cylinder
  Z256  +256 -255 -254 -253 -252  -283 -284
*Phosphor bronze  P9B
  Z257  +257
*PMMA
  Z258  +258 -257   -283
*Copper case cylinder
  Z259  +259 -258 -257 -283 -284
*Plastic  Kel-F     P4
  Z260  +260   -283
*
*end D4 assembly
*Copper case cylinder
  Z261  +261 -260  -283  -284
*Void
  Z262  +262
*Aluminum  p18
  Z263  +263 -262 -283
*Copper case cylinder
  Z264  +264 -263 -262 -283  -284
*Copper base
  Z265  +265
*Aluminum  p18
  Z266  +266 -265
*Copper case cylinder
  Z267  +267 -266 -265
*Copper base
  Z268  +268  OR +295
*Pin Diode Mounted on S1 flat
  Z269  +135  +269
  Z270  +136  +269
*void flat slot for pin diode
*   carved out of S1
  Z271  +135  +270  -269
*carved out of Spectralon
  Z272  +136  +270  -269
*carved out of Spectralon
  Z273  +136  +271
*Pin diode mounted on S3 flat
  Z274  +137  +272
  Z275  +138  +272
*void flat slot for pin diode
*   carved out of S3
  Z276  +273  +137  -272
*carved out of Spectralon
  Z277  +273  +138  -272
*carved out of Spectralon
  Z278  +274  +138
*Void in front of pin diode on S2
  Z279  +206 +276
*Pin diode on S2
  Z280  +206 +275
*Void behind pin diode on S2
  Z281  +206 +277
*Void in front of pin diode on S2
  Z282  +207 +276
*Pin diode on S2
  Z283  +207 +275
*Void behind pin diode on S2
  Z284  +207 +277
*Void in front of pin diode on S2
  Z285  +207 +279
*Pin diode on S2
  Z286  +207 +278
*Void behind pin diode on S2
  Z287  +207 +280
*Void above Pin diode on S2 cut out from
Spectralon
  Z288  +207 +281
  Z289  +207 +282
*Long void slot in copper case to accommodate
pin diode connections
  Z290  +283  +11
  Z291  +283  +13
  Z292  +283  +15
  Z293  +283  +19
  Z294  +283  +25
  Z295  +283  +32
  Z296  +283  +40
  Z297  +283  +48
  Z298  +283  +54
  Z299  +283  +60
  Z300  +283  +65
  Z301  +283  +69
  Z302  +283  +71
  Z303  +283  +73
  Z304  +283  +77
  Z305  +283  +83
  Z306  +283  +90
  Z307  +283  +98
  Z308  +283  +106
  Z309  +283  +112
  Z310  +283  +118
  Z311  +283  +123
  Z312  +283  +127
  Z313  +283  +129
  Z314  +283  +134
  Z315  +283  +139
  Z316  +283  +144
  Z317  +283  +146
  Z318  +283  +149
  Z319  +283  +154
  Z320  +283  +159
  Z321  +283  +165
  Z322  +283  +171
  Z323  +283  +178
  Z324  +283  +185
  Z325  +283  +191
  Z326  +283  +197
```

```
Z327  +283  +200
Z328  +283  +202
Z329  +283  +205
Z330  +283  +208
Z331  +283  +211
Z332  +283  +213
Z333  +283  +216
Z334  +283  +220
Z335  +283  +224
Z336  +283  +229
Z337  +283  +234
Z338  +283  +240
Z339  +283  +246
Z340  +283  +251
Z341  +283  +256
Z342  +283  +259
Z343  +283  +261
Z344  +283  +264
Z345  +284  +11
Z346  +284  +13
Z347  +284  +15
Z348  +284  +19
Z349  +284  +25
Z350  +284  +32
Z351  +284  +40
Z352  +284  +48
Z353  +284  +54
Z354  +284  +60
Z355  +284  +65
Z356  +284  +69
Z357  +284  +71
Z358  +284  +73
Z359  +284  +77
Z360  +284  +83
Z361  +284  +90
Z362  +284  +98
Z363  +284  +106
Z364  +284  +112
Z365  +284  +118
Z366  +284  +123
Z367  +284  +127
Z368  +284  +129
Z369  +284  +134
Z370  +284  +139
Z371  +284  +144
Z372  +284  +146
Z373  +284  +149
Z374  +284  +154
Z375  +284  +159
Z376  +284  +165
Z377  +284  +171
Z378  +284  +178
Z379  +284  +185
Z380  +284  +191
Z381  +284  +197
Z382  +284  +200
Z383  +284  +202
Z384  +284  +205
Z385  +284  +208
Z386  +284  +211
Z387  +284  +213
Z388  +284  +216
Z389  +284  +220
Z390  +284  +224
Z391  +284  +229
Z392  +284  +234
Z393  +284  +240
Z394  +284  +246
Z395  +284  +251
Z396  +284  +256
Z397  +284  +259
Z398  +284  +261
Z399  +284  +264
```

```
*Overlap of slot with material zones
  Z400  +12  +283
  Z401  +14  +283
  Z402  +18  +283
  Z403  +24  +283
  Z404  +31  +283
  Z405  +39  +283
  Z406  +47  +283
  Z407  +53  +283
  Z408  +59  +283
  Z409  +64  +283
  Z410  +68  +283
  Z411  +70  +283
  Z412  +72  +283
  Z413  +76   +283
  Z414  +82  +283
  Z415  +89  +283
  Z416  +97  +283
  Z417  +105  +283
  Z418  +111  +283
  Z419  +117  +283
  Z420  +122  +283
  Z421  +126  +283
  Z422  +128  +283
  Z423  +133  +283
  Z424  +138  +283
  Z425  +143  +283
  Z426  +145  +283
  Z427  +148  +283
  Z428  +153  +283
  Z429  +158  +283
  Z430  +164  +283
  Z431  +170  +283
  Z432  +177  +283
  Z433  +184  +283
  Z434  +190  +283
  Z435  +196  +283
  Z436  +199  +283
  Z437  +201  +283
  Z438  +204  +283
  Z439  +207  +283
  Z440  +210  +283
  Z441  +212  +283
  Z442  +215  +283
  Z443  +219  +283
  Z444  +223  +283
  Z445  +228  +283
  Z446  +233  +283
  Z447  +239  +283
  Z448  +245  +283
  Z449  +250  +283
  Z450  +255  +283
  Z451  +258  +283
  Z452  +260  +283
  Z453  +263  +283
  Z454  +10   +283
*Stainless Bulkhead
  Z455  +285
*VOID REGION SURROUNDING bulkhead
  Z456  +286 OR +287 -285
*Aluminum case back plate perp. to z
  Z457  +288 -295
*Aluminum case front plate perp. to z
  Z458  +289 -4
*Aluminum case top plate perp. to x
  Z459  +290
*Aluminum case bottom plate perp. to x
  Z460  +291
*Aluminum case upper side plate perp. to y
  Z461  +292 -302
*Aluminum case lower side plate perp. to y
  Z462  +293 -303
```

```
*Void cavity inside Al case
  Z463  +294 -7 -11 -13 -14 -15
       -19 -25 -32 -40 -48 -54
       -60 -65 -69 -71 -73 -77 -83 -90 -97 -98
       -106 -112 -118 -123 -127 -128 -129 -134 -139 -144 -145
       -146 -149 -154 -159 -165
       -171 -178 -185
       -191 -192 -193 -194 -195
       -196 -197 -198 -199 -200 -201 -202 -203 -204 -205
       -206 -207 -208 -209 -210 -211 -212 -213 -214 -215
       -216 -217 -218 -219 -220 -221 -222 -223 -224 -225
       -226 -227 -228 -229 -230 -231 -232 -233 -234 -235
       -236 -237 -238 -239 -240 -241 -242 -243 -244 -245
       -246 -247 -248 -249 -250 -251 -252 -253 -254 -255
       -256 -257 -258 -259 -260 -261 -262 -263 -264 -265
       -266 -267 -268


*Void region (rectangular) surrounding case
  Z464  +296
  Z465  +297
  Z466  +298
  Z467  +299
  Z468  +300
  Z469  +301
*Large connector hole in upper y plate
  Z470  +302
*Small conector hole in lower y plate
  Z471  +303
*Pinhole #1
  Z472 +304 +15
  Z473 +304 +19
  Z474 +304 +25
  Z475 +304 +32
*Pinhole #2
  Z476 +305 +65
  Z477 +305 +69
*Pinhole #3
  Z478 +306 +83
  Z479 +306 +90
  Z480 +306 +98
  Z481 +306 +106
  Z482 +306 +112
*Pinhole #4
  Z483 +307 +123
  Z484 +307 +127
*Pinhole #5
  Z485 +308 +139
*Pinhole #6
  Z486 +309 +139
*Pinhole #7
  Z487 +310 +139
*Pinhole #8
  Z488 +311 +139
*Pinhole #9
  Z489 +312 +165
  Z490 +312 +171
  Z491 +312 +178
  Z492 +312 +185
*Pinhole #10
  Z493 +313 +197
  Z494 +313 +200
  Z495 +313 +202
  Z496 +313 +205
*Pinhole #11
  Z497 +314 +208
*Pinhole #12
  Z498 +315 +208
*Pinhole #13
Z499 +316 +229
  Z500 +316 +234
  Z501 +316 +240
  Z502 +316 +246
*Pinhole #14
  Z503 +317 +256
  Z504 +317 +261
  Z505 +317 +264
*Escape Sphere
  Z506 +318
       -296 -297 -298 -299 -300 -301
END
```

Eight-column format on the following two pages used to conserve space. Actual file format is single column.

```
*MATERI
AL
*   1
    0
*   2
    3
*   3
    3
*   4
    0
*   5
    0
*   6
    3
*   7
    9
*   8
    0
*   9
    3
* 10
    9
* 11
    9
* 12
    9
* 13
    9
* 14
   13
* 15
    9
* 16
    0
* 17
    1
* 18
   13
* 19
    9
* 20
    0
* 21
    2
* 22
    2
* 23
   13
* 24
   13
* 25
    9
* 26
    0
* 27
    2
* 28
    2
* 29
    2
* 30
   13
* 31
   13
* 32
    9
* 33
    0
* 34
    6
* 35
    0
*   36
    9
*   72
   13
*   37
   13
*   73
    9
*   38
    9
*   74
    0
*   39
    0
*   75
    1
*   40
    0
*   76
   13
*   41
    2
*   77
    9
*   42
    9
*   78
    0
*   43
    0
*   79
    2
*   44
    2
*   80
    2
*   45
    2
*   81
   13
*   46
   13
*   82
   13
*   47
   13
*   83
    9
*   48
    9
*   84
    0
*   49
    0
*   85
    2
*   50
    2
*   86
   13
*   51
    2
*   87
   13
*   52
    2
*   88
    9
*   53
   13
*   89
    0
*   54
   13
*   90
    1
*   55
    9
*   91
   13
*   56
    0
*   92
    9
*   57
    6
*   93
   13
*   58
    0
*   94
    9
*   59
    2
*   95
   13
*   60
    2
*   96
   12
*   61
   13
*   97
   13
*   62
   13
*   98
   12
*   63
    9
*   99
    9
*   64
    2
*100
    4
*   65
   11
*101
   12
*   66
    0
*102
   10
*   67
    2
*103
   12
*   68
    2
*104
    9
*   69
   13
*105
   13
*   70
   13
*106
   12
*107
   13
*108
   12
*109
    9
*110
   13
*111
    9
*112
    1
*113
   13
*114
    9
*115
    0
*116
    2
*117
   13
*118
   13
*119
    9
*120
    0
*121
    2
*122
   13
*123
   13
*124
    9
*125
    0
*126
    6
*127
    7
*128
   13
*129
   13
*130
    9
*131
    8
*132
    8
*133
    7
*134
   13
*135
   13
*136
    9
*137
    0
*138
    6
*139
    0
*140
    7
*141
   13
*142
   13
*143
    9
*144
    0
*145
    6
*146
    7
*147
    7
*148
   13
*149
   13
*150
    9
*151
    0
*152
    2
*153
    7
*154
   13
*155
   13
*156
    9
*157
    0
*158
    2
*159
    7
*160
   13
*161
   13
*162
    9
*163
    1
*164
   13
*165
    9
*166
   13
*167
    9
*168
   13
*169
   12
*170
    9
*171
   10
*172
   12
*173
    9
*174
   13
*175
   12
*176
    9
*177
   13
*178
    9
*179
    1
*180
   13
*181
    9
*182
    0
*183
    2
*184
   13
*185
    9
*186
    0
*187
    2
*188
   13
*189
    9
*190
    0
*191
    6
*192
    7
*193
   13
*194
    9
*195
    8
*196
    8
*197
    7
*198
   13
*199
    9
*200
    0
*201
    6
*202
    0
*203
    7
*204
   13
*205
    9
*206
    0
*207
    6
*208
    2
*209
    7
*210
   13
*211
    9
*212
    0
*213
    2
*214
    7
*215
   13
*216
    9
*217
    0
*218
    2
*219
    7
*220
   13
*221
    9
*222
    1
*223
    7
*224
    9
*225
   13
*226
    9
*227
    0
*228
    2
*229
    9
*230
    9
*231
    2
*232
    9
*233
    9
*234
    8
*235
    8
*236
    0
*237
    0
*238
    0
*239
    8
*240
    8
*241
    0
*242
    0
*243
    0
*244
    0
*245
    8
*246
    0
*247
    0
*248
    8
*249
    7
*250
   13
*251
    9
*252
    0
*253
    2
*254
    7
*255
   13
*256
    9
*257
    1
*258
    7
*259
    9
*260
   13
*261
    9
*262
    0
*263
    2
*264
    9
*265
    9
*266
    2
*267
    9
*268
    9
*269
    8
*270
    8
*271
    0
*272
    0
*273
    0
*274
    8
*275
    8
*276
    0
*277
    0
*278
    0
*279
    0
*280
    8
*281
    0
*282
    0
*283
    8
```

*284 0 *355 0 *426 2 *497
0 *320 0 *391 13 *462 0
*285 0 *356 0 *427 2 *498
0 *321 0 *392 13 *463 0
*286 0 *357 0 *428 0 *499
8 *322 0 *393 13 *464 0
*287 0 *358 0 *429 0 *500
0 *323 0 *394 13 *465 0
*288 0 *359 0 *430 0 *501
0 *324 0 *395 13 *466 0
*289 0 *360 0 *431 0 *502
0 *325 0 *396 13 *467 0
*290 0 *361 0 *432 0 *503
0 *326 0 *397 13 *468 0
*291 0 *362 0 *433 0 *504
0 *327 0 *398 13 *469 0
*292 0 *363 0 *434 0 *505
0 *328 0 *399 12 *470 0
*293 0 *364 0 *435 0 *506
0 *329 0 *400 12 *471 0
*294 0 *365 9 *436 0
0 *330 0 *401 12 *472
*295 0 *366 13 *437 0
0 *331 0 *402 13 *473
*296 0 *367 13 *438 0
0 *332 0 *403 12 *474
*297 0 *368 13 *439 0
0 *333 0 *404 12 *475
*298 0 *369 13 *440 0
0 *334 0 *405 12 *476
*299 0 *370 13 *441 0
0 *335 0 *406 13 *477
*300 0 *371 13 *442 0
0 *336 0 *407 13 *478
*301 0 *372 13 *443 0
0 *337 0 *408 13 *479
*302 0 *373 13 *444 0
0 *338 0 *409 13 *480
*303 0 *374 13 *445 0
0 *339 0 *410 13 *481
*304 0 *375 13 *446 0
0 *340 0 *411 13 *482
*305 0 *376 13 *447 0
0 *341 0 *412 13 *483
*306 0 *377 13 *448 0
0 *342 0 *413 13 *484
*307 0 *378 13 *449 0
0 *343 0 *414 13 *485
*308 0 *379 13 *450 0
0 *344 0 *415 13 *486
*309 0 *380 13 *451 0
0 *345 0 *416 7 *487
*310 0 *381 13 *452 0
0 *346 0 *417 13 *488
*311 0 *382 13 *453 0
0 *347 0 *418 2 *489
*312 0 *383 13 *454 0
0 *348 0 *419 9 *490
*313 0 *384 13 *455 0
0 *349 0 *420 5 *491
*314 0 *385 13 *456 0
0 *350 0 *421 0 *492
*315 0 *386 13 *457 0
0 *351 0 *422 2 *493
*316 0 *387 13 *458 0
0 *352 0 *423 2 *494
*317 0 *388 12 *459 0
0 *353 0 *424 2 *495
*318 0 *389 12 *460 0
0 *354 0 *425 2 *496
*319 0 *390 12 *461 0

```
**********
********** SOURCE **********
ELECTRONS
ENERGY 25.0
POSITION 0.0 0.0  -0.5
    RADIUS 2.1
       DIRECTION  0.0
**********  OPTIONS  **********
HISTORIES 100000
```

APPENDIX 2

Annotated ITS-ACCEPT Program Listings Incorporating Disk and Rectangle Source Geometry and Individual History Tracking Options

```
      SUBROUTINE INPUT                                                    INPUT    00007
C ***************************************************************************INPUT    00009
C                                                                         INPUT    00010
C     PROGRAM INPUT IS CALLED BY                                          INPUT    00011
C                              ITS                                        INPUT    00012
C     PROGRAM INPUT CALLS                                                 INPUT    00013
C         INTRINSIC FUNCTIONS                                             INPUT    00014
C                              REAL          (TIGER & CYLTRAN)            INPUT    00015
C                              SQRT, ABS     (ACCEPT)                     INPUT    00016
C         EXTERNAL FUNCTIONS                                              INPUT    00017
C                              ALIST,  ELIST,  START,  PREP, KOP,         INPUT    00018
C                              REQALL, GEOMIN, SCRINF, OPOPTS             INPUT    00019
C                              KEYMAP, OPREAD                             INPUT    00020
C                              JOGEN   (ACCEPT)                           INPUT    00021
C                                                                         INPUT    00022
C     ORIGINATION DATE      12 DEC 67.                                    INPUT    00023
C     LAST MODIFIED         17 MAY 91                                     INPUT    00024
C                                                                         INPUT    00025
C     FUNCTION                                                            INPUT    00026
C        THIS PROGRAM IS USED TO READ AND PROCESS USER-SUPPLIED           INPUT    00027
C        CARD INPUT                                                       INPUT    00028
C                                                                         INPUT    00029
C ***************************************************************************INPUT    00030
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, XPED, STTS, SCALE, PLTITLINPUT    00031
C                   PAREM, GOMLOC (ACCEPT)                                INPUT    00032
C                   FLUOR         (PCODES)                                INPUT    00033
C                   PLOT          (PLOTS)                                 INPUT    00034
C$    LIST(S=0)                                                           INPUT    00035
CDIR$ NOLIST                                                              INPUT    00036
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)                                 CNSTNT   00081
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
      SAVE                                                                CNSTNT   00082
C                                                                         PARAMS   00002
C ------------------------------------------------------------------------ PARAMS   00003
C                                                                         PARAMS   00004
C ... I/O UNIT DECLARATIONS AND ARRAY BUFFERS                             PARAMS   00005
      PARAMETER (IIN = 5, IOUT = 6, ITP10 = 10, ITP11 = 11, ITP12 = 12,   PARAMS   00006
     $           ITP14 = 14, MAXKEY = 36)
C                                                                         PARAMS   00008
      PARAMETER ( INMT=15,          INEM=8,       INMAX=64,    NSURV=2775, PARAMS   00009
     $            IMTOP=INMAX+1,    IKTOP=89,     IMMAX=33,    INPANG=21,  PARAMS   00010
     $            INRANG=34,  INTANG=INMAX/4+1, INEEL=13,    INPEL=21,   PARAMS   00011
     $            INEPS=9,          INGAS=1000,   INLAN=5000,  INPPS=21,   PARAMS   00012
     $            INLAMB=1591,      JAHSUB=51,    IJSPEC=51,   JATPR=698,  PARAMS   00013
     $          JATAN=799, INTAB=30, IMTAX=64)                             STAN     00001
C TMJ: END OF MODIFICATION                                                STAN     00002
C                                                                         PARAMS   00015
      PARAMETER ( IMTOP1 = IMTOP,   INMAX1 = INMAX+1,  INMTP1 = INMT+1,   PARAMS   00016
     $            INEEL1 = INEEL,   INGAS1 = INGAS+1,  INLAN1 = INLAN+1,PARAMS   00017
     $            INEPS1 = INEPS,   NSURV1 = NSURV+1,                     PARAMS   00018
     $            INRNG1 = INRANG,  INTNG1 = INTANG  )                    PARAMS   00019
C                                                                         PARAMS   00020
      PARAMETER ( KPTMAX=5000,                  INSTAT=30,                PARAMS   00021
     $            NCHANG=INPANG*INRANG*INTANG, NJAH1=NCHANG*INMT,       PARAMS   00022
     $            NBDIS = IKTOP*IMTOP,         NJAH2=NBDIS*INMT,        PARAMS   00023
     $            NGG   = INMAX*IMMAX,         NJAH3=NGG*INMT,          PARAMS   00024
     $            NJAH4 = NSURV*INMT,          NJAH5=JATPR*INMT )       PARAMS   00025
```

Code modification

```
C                                                                       PARAMS   00026
C ... ARRAY DIMENSIONS FOR ZONING AND ESCAPE DISTRIBUTIONS              PARAMS   00027
      PARAMETER (  IKMAX  = 18,    IJMAX  = 50,                         PARAMS   00028
     $             IKPMAX = 18,    IJPMAX = 50,                         PARAMS   00029
     $             INIZON  = 901, INSZON = 900)                         PARAMS   00030
C                                                                       PARAMS   00031
      PARAMETER ( IKMX1  = IKMAX+1,     IKPMX1 = IKPMAX+1,              PARAMS   00032
     $            IJMX1  = IJMAX+1,     IJPMX1 = IJPMAX+1,              PARAMS   00033
     $            IMMAX1 = IMMAX+1 )                                    PARAMS   00034
C                                                                       PARAMS   00035
C ... ARRAY DIMENSIONS FOR PULSE-HEIGHT AND FLUX DISTRIBUTIONS          PARAMS   00036
      PARAMETER ( IJSMAX = 160,          IJFMAX  = 10,                  PARAMS   00037
     $            IJSMX1  = IJSMAX+1,    IJFMX1  = IJFMAX+1,            PARAMS   00038
     $            IJFMXP  = 10,          IJFMP1  = IJFMXP+1,            PARAMS   00039
     $            IKFMAX  =  6,          IKFMXP =  6,                   PARAMS   00040
     $            IKFMX1  = IKFMAX+1,    IKFMP1 = IKFMXP+1,             PARAMS   00041
     $            INLF    = 10,          INLFP   = 10)                  PARAMS   00042
C                                                                       PARAMS   00043
C ... COMMON AZIMUTHAL PARAMETERS TO FACILITATE COMMON CODING           PARAMS   00044
      PARAMETER (IKMAZ = 1, IKPMAZ = 1)                                 PARAMS   00045
      PARAMETER (IKFMAZ = 1, IKFMZP = 1)                                PARAMS   00046
C _____________________________________________                         PARAMS   00048
C ... PARAMETERS SPECIFIC TO ACCEPT AND CYLTRAN                         PARAMS   00049
C ---------------------------------------------                         PARAMS   00050
      PARAMETER (IKMZ1  = IKMAZ+1,    IKPMZ1 = IKPMAZ+1,                PARAMS   00051
     $           IKFMZ1 = IKFMAZ+1,   IKFPZ1 = IKFMZP+1,                PARAMS   00052
     $           INPNTS = 500,                                          PARAMS   00053
     $           NANGS  = 360)                                          PARAMS   00054
C -------------------------------------------------------               PARAMS   00055
C                                                                       PARAMS   00077
C _____________________________                                         PARAMS   00078
C ... ACCEPT SPECIFIC PARAMETERS                                        PARAMS   00079
C -----------------------------                                         PARAMS   00080
      PARAMETER (NESC = 1,      NESC1 = NESC,                           PARAMS   00081
     $ INUMR = 900, NAZ = 5,       ITMA= 18000, IFPD = 6000,            PARAMS   00082
     $ IJTY = 500,  IARB  = 5,     NVIEWS = 5,  NCZONE = 60,            PARAMS   00083
     $ INVALD = 10, INOFND = 10)                                        PARAMS   00084
C ... PARAMETERS FOR AUTOMATIC SUBZONING                                PARAMS   00085
      PARAMETER ( ILSUBZ=4)                                             PARAMS   00086
C -------------------------------------------------------               PARAMS   00089
      PARAMETER (NLAST = 50)                                            PARAMS   00103
      PARAMETER ( INUMK = 3,  INGP = INMT)                              OUT      00002
      LOGICAL RRKILL, FLMTEL
```

No changes in OUT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
      COMMON /OUT/                                                      OUT      00003
C                                                                       PLTITL   00002
      CHARACTER*80 TITLE                                                PLTITL   00003
      COMMON /PLTITL/ TITLE                                             PLTITL   00004
C                                                                       PLTITL   00005
C                                                                       CALC     00002
      COMMON /CALC/                                                     CALC     00003
```

No changes in CALC common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                       CALC     00139
C                                                                       XPED     00002
      COMMON /XPED/                                                     XPED     00003
     1 DETOUR(INMT), RHO(INMT), MT, MTP, MTP0                           XPED     00010
C                                                                       XPED     00012
      LOGICAL DMPFLG, FLMC                                              STTS     00002
      DOUBLE PRECISION IRSAV                                            STTS     00010
      COMMON  /STTS/  IB,  NB,  NSORS, IBT, BOLD, BATCH, KPUTMX, DMPFLG STTS     00017
     $ ,  IHIST,   IRSAV,  KPUT, FLMC                                   STTS     00018
C                                                                       STTS     00019
C                                                                       SUBZ     00002
      COMMON /SUBZ/ NSUBZ(INIZON), ZFAC(ILSUBZ)                         SUBZ     00003
     1 , NX(ILSUBZ),   XH(ILSUBZ),   XFAC(ILSUBZ),                     SUBZ     00005
     2   NY(ILSUBZ),   YH(ILSUBZ),   YFAC(ILSUBZ),                     SUBZ     00006
     3   NZ(ILSUBZ),   ZH(ILSUBZ)                                      SUBZ     00007
     $ , EPS1X(ILSUBZ), EPS1Y(ILSUBZ), EPS1Z(ILSUBZ),                   SUBZ     00009
```

```
     $   EPS2X(ILSUBZ), EPS2Y(ILSUBZ), EPS2Z(ILSUBZ)                    SUBZ    00010
C                                                                       PAREM   00002
      CHARACTER*3 OTYPE(10), OBODY                                      PAREM   00003
      LOGICAL FLDBG, FLDBGL                                             PAREM   00004
      COMMON /PAREM/                                                    PAREM   00008
     $  XB(3),    WT(3),    RIN,    ROUT,    PINF,    DIST,    IR,     PAREM   00009
     $  FLDBG,    IRPRIM,   ICALL,  LSURF,   NBO,     LRI,     LRO,    PAREM   00013
     $  KLOOP,    LOOP,     ITYPE,  FLDBGL                              PAREM   00014
      COMMON /PAREMO/  OTYPE                                            PAREM   00015
C                                                                       PAREM   00016
C                                                                       GOMLOC  00002
      COMMON /GOMLOC/                                                   GOMLOC  00003
     $   LDATA,   LTMA,   LFPD,   NUMR,   NUMB, LDATP1, LTMAM1,        GOMLOC  00004
     $   NVALD,   NOFND                                                 GOMLOC  00005
C                                                                       GOMLOC  00006
C                                                                       PLOT    00002
      COMMON /PLOT/ NPLOTS, PHIPLT(NVIEWS), THEPLT(NVIEWS),             PLOT    00003
     $   XMNPLT(NVIEWS), XMXPLT(NVIEWS), YMNPLT(NVIEWS), YMXPLT(NVIEWS),PLOT    00004
     $   XMN, XMX, YMN, YMX, KPLT                                       PLOT    00005
C$    LIST(S=1)                                                         INPUT   00051
CDIR$ LIST                                                              INPUT   00052
      COMMON  /SCALE/  BNUM, XNUM                                       SCALE   00002
        COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
C                                                                       SCALE   00003
C                                                                       INPUT   00057
        COMMON /HITS/EDPR(10),EDNK(10),EDSC(10),EDTL(10),LHCL(10),NINDV

      CHARACTER*80   KARD                                               INPUT   00058
      COMMON / IOPACK  / KARD                                           INPUT   00059
      LOGICAL EOFLAG, FLKEY(MAXKEY), FLDUP, FLNEWD                      INPUT   00060
C                                                                       INPUT   00061
      WRITE(IOUT,'(''1*****************************''/                  INPUT   00062
     $            '' *   BEGIN READING INPUT    *''/                   INPUT   00063
     $            '' *****************************'')')               INPUT   00064
      IF (IRUN .NE. 1) THEN                                             INPUT   00065
C                                                                       INPUT   00066
C       ********************************************************************INPUT   00067
C       * CONVERT UNITS FROM CM BACK TO GM/CM**2 FOR MULTIPLE PROBLEMS *INPUT   00068
C       ********************************************************************INPUT   00069
C                                                                       INPUT   00070
        DO 50 L=1,NMT                                                   INPUT   00071
          RHOL = RHO(L)                                                 INPUT   00073
          DO 10 N=1,NMAX1                                               INPUT   00074
            RANGE(N,L) = RANGE(N,L)*RHOL                                INPUT   00075
            DRG(N,L)   = DRG(N,L)  *RHOL                                INPUT   00076
            PXRAY(N,L) = PXRAY(N,L)/RHOL                                INPUT   00077
            PBREM(N,L) = PBREM(N,L)/RHOL                                INPUT   00078
  10        CONTINUE                                                    INPUT   00079
          DO 20 N=1,NMAX                                                INPUT   00080
            DRGS(N,L)  = DRGS(N,L) *RHOL                                INPUT   00081
            COSAV(N,L) = COSAV(N,L)/RHOL                                INPUT   00082
  20        CONTINUE                                                    INPUT   00083
          DO 30 J=1, NGMAX                                              INPUT   00084
            AT(J,L) = AT(J,L)/RHOL                                      INPUT   00085
  30        CONTINUE                                                    INPUT   00086
  50    CONTINUE                                                        INPUT   00087
      END IF                                                            INPUT   00088
C     ***********************************                               INPUT   00133
C     *  SET DEFAULT INPUT PARAMETERS  *                                INPUT   00134
C     ***********************************                               INPUT   00135
      FLSTRG = .TRUE.                                                   INPUT   00136
      FLNOK  = .TRUE.                                                   INPUT   00137
      FLNEL  = .FALSE.                                                  INPUT   00138
      FLBAD  = .TRUE.                                                   INPUT   00139
      FLGSEC = .TRUE.                                                   INPUT   00140
      FLNXEV = .FALSE.                                                  INPUT   00141
      FLBSC  = .FALSE.                                                  INPUT   00142
      FLCOH  = .TRUE.                                                   INPUT   00143
      FLSKN  = .TRUE.                                                   INPUT   00144
      FLDBG  = .FALSE.                                                  INPUT   00146
```

New code

New code

```
      FLDBGL = .FALSE.                                                  INPUT    00147
      RLAN   = C5EM1                                                    INPUT    00149
      BNUM   = CZERO                                                    INPUT    00150
      XNUM   = CZERO                                                    INPUT    00151
      DLIM   = CZERO                                                    INPUT    00152
      NPRTCL = 1                                                        INPUT    00153
C
      IRECTS = 0
       IDISKS = 0
       KPERPYZ = 0
       KPERPXZ = 0
       KPERPXY = 0
C
      NINDV=0
       DO 599 J=1,10
599   LHCL(J)=0
C                                                                       INPUT    00154
      TITLE  = ' '                                                      INPUT    00155
      NPRT   = 12                                                       INPUT    00156
      IECHO  = 0                                                        INPUT    00157
      NB     = 10                                                       INPUT    00158
      IMAX   = 1000                                                     INPUT    00159
      IBT    = 0                                                        INPUT    00160
      MBSC   = 1                                                        INPUT    00161
      BOLD   = CZERO                                                    INPUT    00162
      IMXOLD = 0                                                        INPUT    00163
      INRAN  = CZERO                                                    INPUT    00168
      BASE   = CTWO                                                     INPUT    00170
      XNCYC  = CEIGHT                                                   INPUT    00171
      TMFAC  = BASE**(-1.0/XNCYC)                                       INPUT    00172
      DMPFLG = .FALSE.                                                  INPUT    00173
C                                                                       INPUT    00174
C ... INITIALIZE LOGICALS FOR IDENTIFYING MATERIALS (NON-P CODES) OR     INPUT    00175
C     ELEMENTS (P CODES) THAT ARE PRESENT IN A GIVEN PROBLEM - USED      INPUT    00176
C     FOR IDENTIFYING RELEVANT LINE RADIATION.                          INPUT    00177
      NGP = NMT                                                         INPUT    00182
      DO 60 J=1,NGP                                                     INPUT    00184
   60   FLMTEL(J) = .FALSE.                                             INPUT    00185
C                                                                       INPUT    00186
      NPLOTS  = 0                                                       INPUT    00188
C     ------------------                                                INPUT    00193
C ... SOURCE VARIABLES                                                  INPUT    00194
C     ------------------                                                INPUT    00195
      FLESRC = .TRUE.                                                   INPUT    00196
      JSPEC  = 0                                                        INPUT    00197
      FLSPEC = .FALSE.                                                  INPUT    00198
      TIN    = CONE                                                     INPUT    00199
      TPCUT  = C1EM2                                                    INPUT    00200
      TCUT   = CZERO                                                    INPUT    00201
      TSAVE  = CZERO                                                    INPUT    00202
      ICTH   = 1                                                        INPUT    00203
      CTSR   = CZERO                                                    INPUT    00204
      CTHIN  = C90                                                      INPUT    00205
      ZSR    = CZERO                                                    INPUT    00210
      XSR    = CZERO                                                    INPUT    00213
      YSR    = CZERO                                                    INPUT    00214
      CPSR   = CZERO                                                    INPUT    00215
      SORCIN = CZERO                                                    INPUT    00216
C     --------------------------                                        INPUT    00218
C ... ELECTRON ESCAPE VARIABLES                                         INPUT    00219
C     --------------------------                                        INPUT    00220
      JMAX  = 10                                                        INPUT    00221
      FLESC = .FALSE.                                                   INPUT    00222
      ITMK  = 1                                                         INPUT    00223
      IAMK  = 1                                                         INPUT    00224
      KMAX  = 18                                                        INPUT    00225
      KMAZ  = 1                                                         INPUT    00226
      IAMKZ = 1                                                         INPUT    00228
C     ------------------------                                          INPUT    00230
C ... PHOTON ESCAPE VARIABLES                                           INPUT    00231
C     ------------------------                                          INPUT    00232
```

New code

```
      JPMAX  = 10                                                        INPUT    00233
      FLESCP = .FALSE.                                                   INPUT    00234
      IPMK   = 1                                                         INPUT    00235
      IBMK   = 1                                                         INPUT    00236
      KPMAX  = 18                                                        INPUT    00237
      KPMAZ  = 1                                                         INPUT    00238
      IBMKZ  = 1                                                         INPUT    00240
C     -------------------------                                          INPUT    00242
C ... ELECTRON FLUX VARIABLES                                            INPUT    00243
C     -------------------------                                          INPUT    00244
      FLFLUX = .FALSE.                                                   INPUT    00245
      JFMAX  = 10                                                        INPUT    00246
      KFMAX  = 6                                                         INPUT    00247
      KFMAZ  = 1                                                         INPUT    00248
      IFAMKZ = 1                                                         INPUT    00250
      IFMK   = 1                                                         INPUT    00252
      IFAMK  = 1                                                         INPUT    00253
C     ----------------------                                             INPUT    00254
C ... PHOTON FLUX VARIABLES                                              INPUT    00255
C     ----------------------                                             INPUT    00256
      FLFLXP = .FALSE.                                                   INPUT    00257
      JFMAXP = 10                                                        INPUT    00258
      KFMAXP = 6                                                         INPUT    00259
      KFMAZP = 1                                                         INPUT    00260
      IFBMKZ = 1                                                         INPUT    00262
      IFMKP  = 1                                                         INPUT    00264
      IFBMK  = 1                                                         INPUT    00265
C     ------------------------------------                               INPUT    00266
C ... PULSE HEIGHT DISTRIBUTION VARIABLES                                INPUT    00267
C     ------------------------------------                               INPUT    00268
      FLPHD  = .FALSE.                                                   INPUT    00269
      JSMAX  = 12                                                        INPUT    00270
      IPHMK  = 1                                                         INPUT    00271
C                                                                        INPUT    00272
C     ***********************************************                    INPUT    00273
C     *           BEGIN READING INPUT               *                    INPUT    00274
C     *  ZERO-LEVEL KEYWORDS IN ALPHABETICAL ORDER  *                    INPUT    00275
C     ***********************************************                    INPUT    00276
C                                                                        INPUT    00280
C ... SET ERROR TRAP FLAG TO ZERO                                        INPUT    00281
      IERTRP = 0                                                         INPUT    00282
      NUMCRD = 0                                                         INPUT    00283
      FLNEWD = .FALSE.                                                   INPUT    00284
      FLDUP  = .FALSE.                                                   INPUT    00285
      DO 65 IKEY=1,MAXKEY                                                INPUT    00286
   65   FLKEY(IKEY) = .FALSE.                                            INPUT    00287
C                                                                        INPUT    00288
C ... READ THE NEXT CARD IN THE INPUT FILE                               INPUT    00289
C                                                                        INPUT    00290
C     ____________________________                                       INPUT    00291
   70 CALL OPREAD(1,IECHO,EOFLAG)                                        INPUT    00292
C     ------------------------------                                     INPUT    00293
C                                                                        INPUT    00294
C ... NOTE, COMMENT CARDS DENOTED BY * IN COLUMN 1, SKIPPED INTERNALLY   INPUT    00295
C                                                                        INPUT    00296
      IF (.NOT. EOFLAG) THEN                                             INPUT    00297
        NUMCRD = NUMCRD + 1                                              INPUT    00298
C                                                                        INPUT    00299
   80   IF (KOP('BATCHES') .GE. 1) THEN                                  INPUT    00300
C         ---------                                                      INPUT    00301
C ...      BATCHES                                                       INPUT    00302
C         ---------                                                      INPUT    00303
C          Check if primary keyword has been used                        INPUT    00304
C                                                                        INPUT    00305
           IKEY = 1                                                      INPUT    00306
C                                                                        INPUT    00307
           IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                      INPUT    00308
C                            -------------------------                   INPUT    00309
           FLKEY(IKEY) = .TRUE.                                          INPUT    00310
C                                                                        INPUT    00311
           NB = PARM(1)                                                  INPUT    00312
```

```
C
      ELSE IF (KOP('CUTOFFS') .GE. 0) THEN                              INPUT    00313
C      ---------                                                        INPUT    00314
C ...   CUTOFFS                                                         INPUT    00315
C      ---------                                                        INPUT    00316
        IKEY = 2                                                        INPUT    00317
C                                                                       INPUT    00318
        IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                        INPUT    00319
C                        ------------------------                       INPUT    00320
        FLKEY(IKEY) = .TRUE.                                            INPUT    00321
C                                                                       INPUT    00322
        KARG = KOP('CUTOFFS')                                           INPUT    00323
        IF (KARG .GE. 1) THEN                                           INPUT    00324
          TCUT = PARM(1)                                                INPUT    00325
        END IF                                                          INPUT    00326
        IF (KARG .GE. 2) THEN                                           INPUT    00327
          TPCUT = PARM(2)                                               INPUT    00328
        END IF                                                          INPUT    00329
C                                                                       INPUT    00330
      ELSE IF (KOP('DETAIL-IONIZE') .GE. 0) THEN                        INPUT    00331
C      ------------------                                               INPUT    00332
C ...   DETAIL-IONIZATION                                               INPUT    00333
C      ------------------                                               INPUT    00334
        IKEY = 33                                                       INPUT    00335
C                                                                       INPUT    00336
        IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                        INPUT    00337
C                        ------------------------                       INPUT    00338
        FLKEY(IKEY) = .TRUE.                                            INPUT    00339
C                                                                       INPUT    00340
        NPRTCL = 2                                                      INPUT    00341
C                                                                       INPUT    00342
                                                                        INPUT    00343
```

```
C
      ELSE IF (KOP('RECTANGLE-SOURCE').GE.0)THEN
C      ----------------
C       RECTANGULAR PLANE SOURCE
C      ------------
        IKEY = 34
C
C
        IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C                        ------------------------
        FLKEY(IKEY) = .TRUE.
C
        KARG = KOP('RECTANGLE-SOURCE')
      IF(KARG.LT.6)THEN
            WRITE(IOUT,68)

68    FORMAT(1X,'>>>>>')
            WRITE(IOUT,51)
               WRITE(IOUT,68)

51    FORMAT(1X,' USER MUST ENTER 6 NUMBERS (XLOW,XHIGH,YLOW,YHIGH,ZLOW,
     $ZHIGH) TO DEFINE SOURCE LOWER AND UPPER COORDINATE LIMITS OF SOURC
     $E RECTANGLE')
          CALL ABORTX('INPUT')
        ELSE
            IRECTS = 1
        XLOWS = PARM(1)
        XHIGHS = PARM(2)
        YLOWS = PARM(3)
        YHIGHS = PARM(4)
        ZLOWS = PARM(5)
        ZHIGHS = PARM(6)
        END IF
```

New code

```
C
      ELSE IF (KOP('CIRCLE-SOURCE').GE.0)THEN
C
C          CIRCLE PLANE SOURCE
C
           IKEY = 35
C
C
           IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C
           FLKEY(IKEY) = .TRUE.
C
           KARG = KOP('CIRCLE-SOURCE')
         IF(KARG.LT.6)THEN
               WRITE(IOUT,68)
               WRITE(IOUT,52)
               WRITE(IOUT,68)
52     FORMAT(1X,' USER MUST ENTER 6 NUMBERS - COORDINATES OF CIRCLE CENT
     $ER (XO,YO,ZO),AND COORDINATES A POINT ON CIRCUMFERENCE'/1X,'(XC,YC
     $,ZC) TO DEFINE POSITION AND ORIENTATION OF SOURCE CIRCLE')
C
            CALL ABORTX('INPUT')
         ELSE
            IDISKS = 1
         XCENT = PARM(1)
         YCENT = PARM(2)
         ZCENT = PARM(3)
         XCIR = PARM(4)
         YCIR = PARM(5)
         ZCIR = PARM(6)
         CALL OPREAD(1,IECHO,EOFLAG)
         IF(KOP('RADIUS').GE.1) THEN
         SORCIN = PARM(1)
         ELSE
         GO TO 80
         END IF
C
      END IF
C
C
      ELSE IF (KOP('INDIVIDUAL-HISTS').GE.0) THEN
C
C          RECORD SINGLE HISTORY ENERGY DEPOSITIONS
C
C
           IKEY = 36
C
           IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C
           FLKEY(IKEY) = .TRUE.
C
           KARG   = KOP('INDIVIDUAL-HISTS')
             IF(KARG.LT.1.OR. KARG.GT.10)THEN
                WRITE(IOUT,68)
                   WRITE(IOUT,688)
                   WRITE(IOUT,68)
688    FORMAT(1X,'USER MUST ENTER NO FEWER THAN 1 AND NO MORE THAN 10 CEL
     $L NUMBERS IN WHICH THE ENERGY DEPOSITION'/1X,'FOR INDIVIDUAL ELECT
     $RON HISTORIES ARE TO BE RECORDED.')
C
```

New code

```
          CALL ABORTX('INPUT')
        ELSE
          DO 689 KRRG=1,KARG
689      LHCL(KRRG)=PARM(KRRG)
         NINDV=KARG
        WRITE(IOUT,587)
        WRITE(IOUT,588)(LHCL(KRRG),KRRG=1,NINDV)
588    FORMAT(1X,'ENERGY DEPOSITION FOR INDIVIDUAL HISTORIES WILL BE RECO
     $RDED ON FILE "EDSHOW.TXT" FOR CELL NOS.'/5X,10I5)
        WRITE(IOUT,587)
587    FORMAT(/1X,'*************************************************************
     $*************************************************************'
     $/1X,'*************************************************************
     $*************************************************************')
       END IF
```

New code

```
C
C
C
       ELSE IF (KOP('DIRECTION') .GE. 0) THEN                          INPUT    00344
C                                                                      INPUT    00345
C ...    DIRECTION                                                     INPUT    00346
C        ---------                                                     INPUT    00347
         IKEY = 3                                                      INPUT    00348
C                                                                      INPUT    00349
         IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                      INPUT    00350
C                         ------------------------                     INPUT    00351
         FLKEY(IKEY) = .TRUE.                                          INPUT    00352
C                                                                      INPUT    00353
```

Remaining portion of subroutine INPUT (omitted here for brevity) is identical to original ACCEPT [1] code

```
      END                                                              INPUT    01841
```

```
      SUBROUTINE HIST                                                    HIST     00007
C ***********************************************************************HIST     00009
C                                                                        HIST     00010
C     SUBROUTINE HIST IS CALLED BY                                       HIST     00011
C                                   ITS                                  HIST     00012
C     SUBROUTINE HIST CALLS                                              HIST     00013
C         INTRINSIC FUNCTIONS                                            HIST     00014
C                              SQRT, RANF                                HIST     00015
C                              REAL                 (CYLTRAN)            HIST     00016
C         EXTERNAL FUNCTIONS                                             HIST     00017
C                              CLASS, ECROS, EHIST, TIMER, PHIST         HIST     00018
C                              RANINT, RANSAV                            HIST     00019
C                              ZONE                           (CYLTRAN)  HIST     00020
C                              FOLD,  ZONEA                   (ACCEPT)   HIST     00021
C                              PLTDAT                         (M-CODES)  HIST     00022
C                                                                        HIST     00023
C     ORIGINATION DATE     16 JAN 68.                                    HIST     00024
C     LAST MODIFIED        30 MAY 91                                     HIST     00025
C                                                                        HIST     00026
C     FUNCTION                                                           HIST     00027
C        THIS PROGRAM SAMPLES PHASE SPACE PARAMETERS FOR                 HIST     00028
C        SOURCE PARTICLES.  SUBSEQUENTLY CALLS EITHER EHIST OR           HIST     00029
C        PHIST.  RETRIEVES "BANKED" ELECTRONS AND CALLS EHIST.           HIST     00030
C        TALLIES PULSE HEIGHT DISTRIBUTION.                              HIST     00031
C                                                                        HIST     00032
C ***********************************************************************HIST     00033
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, XPED, STOR, STTS,         HIST     00034
C                  (PAREM)-ACCEPT                                        HIST     00035
C$    LIST(S=0)                                                          HIST     00036
CDIR$ NOLIST                                                             HIST     00037
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)                                CNSTNT   00081
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
      PARAMETER (CCOHLM=57.031547D0,    CCOHMX=80.654788D0)              CNSTNT   00140
C                                                                        PARAMS   00002
C ---------------------------------------------------------------------- PARAMS   00003
C                                                                        PARAMS   00004
C ... I/O UNIT DECLARATIONS AND ARRAY BUFFERS                            PARAMS   00005
      PARAMETER (IIN = 5, IOUT = 6, ITP10 = 10, ITP11 = 11, ITP12 = 12,  PARAMS   00006
```

PARAMS common block identical to that shown in subroutine INPUT

```
       COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
      LOGICAL RRKILL, FLMTEL                                             OUT      00002
      COMMON /OUT/                                                       OUT      00003
```

New Code

No changes in OUT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00002
      COMMON /CALC/                                                      CALC     00003
```

No changes in CALC common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        XPED     00002
      COMMON /XPED/                                                      XPED     00003
     1 DETOUR(INMT), RHO(INMT), MT, MTP, MTP0                            XPED     00010
C                                                                        XPED     00012
      LOGICAL DMPFLG, FLMC                                               STTS     00002
      DOUBLE PRECISION IRSAV                                             STTS     00010
      COMMON  /STTS/  IB,  NB,  NSORS, IBT, BOLD, BATCH, KPUTMX, DMPFLG  STTS     00017
     $ ,  IHIST,   IRSAV,  KPUT, FLMC                                    STTS     00018
C                                                                        STTS     00019
C                                                                        PAREM    00002
      CHARACTER*3 OTYPE(10), OBODY                                       PAREM    00003
      LOGICAL FLDBG, FLDBGL                                              PAREM    00004
      COMMON /PAREM/                                                     PAREM    00008
     $  XB(3),   WT(3),   RIN,   ROUT,   PINF,   DIST,   IR,            PAREM    00009
```

```
     $  FLDBG,    IRPRIM,   ICALL, LSURF,  NBO,     LRI,     LRO,          PAREM    00013
     $  KLOOP,    LOOP,     ITYPE, FLDBGL                                  PAREM    00014
      COMMON /PAREMO/  OTYPE                                               PAREM    00015
C                                                                          PAREM    00016
        COMMON /HITS/EDPR(10),EDNK(10),EDSC(10),EDTL(10),LHCL(10),NINDV    HIST     00047
C$    LIST(S=1)                                                            HIST     00048
CDIR$ LIST                                                                 STOR     00002
      COMMON /STOR/                                                        STOR     00003
     1 CTHS(NLAST),  TS(NLAST),  WS(NLAST),  ZS(NLAST),  IPRS(NLAST),      STOR     00004
     2 LBS(NLAST),   NTS(NLAST)                                            STOR     00006
     $ ,XS(NLAST),   YS(NLAST),  STHS(NLAST),                              STOR     00007
     3 CPHS(NLAST),  SPHS(NLAST)                                           STOR     00009
     4 ,LBCS(NLAST)                                                        HIST     00050
C                                                                          RANNUM   00003
      EXTERNAL RAN                                                         HIST     00089
C                                                                          HIST     00090
      CIMAX = IMAX                                                         HIST     00091
      IF (FLSPEC) THEN                                                     HIST     00092
        TAV = CZERO                                                        HIST     00093
      ELSE                                                                 HIST     00094
        TAV = CIMAX*TIN                                                    HIST     00095
      END IF                                                               HIST     00096
C     ____________________                                                 HIST     00097
      CALL RANINT(IRA)                                                     HIST     00098
C     --------------------                                                 HIST     00101
      IF (IB .EQ. 1) INRAN = IRA                                           HIST     00103
      DO 130 I = 1, IMAX
            DO 1301 JJJ=1,10
               EDPR(JJJ)=0.
               EDNK(JJJ)=0.
               EDSC(JJJ)=0.
1301     EDTL(JJJ)=0.
         IHIST = I                                                         HIST     00104
      MODTMJ = MIN(100,IMAX)                                               LAHEY    00017
      IF(I.EQ.MODTMJ*(I/MODTMJ)) THEN                                      LAHEY    00018
      CALL TOTTIM(XTMJ)                                                    LAHEY    00019
      WRITE(*,'(/'' HISTORY'',I8,'', ELAPSED MINUTES'',F10.2)')            LAHEY    00020
     1I,XTMJ/60.                                                           LAHEY    00021
      ENDIF                                                                LAHEY    00022
        W     = CONE                                                       HIST     00105
        CWCF  = W                                                          HIST     00106
        LAST  = 0                                                          HIST     00107
C       ____________________                                               HIST     00108
        CALL RANSAV(IRSAV)                                                 HIST     00109
C       --------------------                                               HIST     00110
C                                                                          HIST     00111
C _________________                                                        HIST     00112
C ... SOURCE ENERGY                                                        HIST     00113
C -----------------                                                        HIST     00114
        IF (FLSPEC) THEN                                                   HIST     00115
          RA = RAN(IRAN)                                                   HIST     00116
          DO 14 JHIST = 2,JSPEC                                            HIST     00117
             IF ( RA. GT. SPECIN(JHIST) ) GO TO 16                         HIST     00118
   14     CONTINUE                                                         HIST     00119
   16     T = ESP(JHIST-1) + ( RA -SPECIN(JHIST-1) )*( ESP(JHIST)          HIST     00120
     $       - ESP(JHIST-1) )/( SPECIN(JHIST) - SPECIN(JHIST-1) )          HIST     00121
          TAV = TAV + T                                                    HIST     00122
          IF ( (FLESRC .AND. (T .GT. TCUT )) .OR.                          HIST     00123
     $         (.NOT. FLESRC .AND. (T .GT. TPCUT)) ) THEN                  HIST     00124
             GO TO 20                                                      HIST     00125
          ELSE                                                             HIST     00126
             NTREJ = NTREJ + 1                                             HIST     00127
             TREJ  = TREJ + W*T                                            HIST     00128
             GO TO 1299                                                    HIST     00129
          END IF                                                           HIST     00130
        END IF                                                             HIST     00131
        T  = TIN                                                           HIST     00132
   20   NT = NTFST                                                        HIST     00133
C       ____________________                                               HIST     00134
        CALL CLASS (T,NT)                                                  HIST     00135
C       --------------------                                               HIST     00136
```

New Code

New Code

```
C _____                                                                 HIST     00137
C ... SOURCE DIRECTION                                                  HIST     00138
C --------------------                                                  HIST     00139
        IF (ICTH .EQ. 2) THEN                                           HIST     00140
          RA  = RAN(IRAN)                                               HIST     00141
          COM = CTHIN+ RA*(CONE-CTHIN)                                  HIST     00142
        ELSE IF (ICTH .EQ. 3) THEN                                      HIST     00143
          RA  = RAN(IRAN)                                               HIST     00144
          COM = SQRT(CTHIN+RA*(CONE-CTHIN))                             HIST     00145
        ELSE IF (ICTH .EQ. 1) THEN                                      HIST     00146
          CTH(1) = CTSR                                                 HIST     00147
          STH(1) = STSR                                                 HIST     00149
          CPH(1) = CPSR                                                 HIST     00150
          SPH(1) = SPSR                                                 HIST     00151
          GO TO 69                                                      HIST     00153
        END IF                                                          HIST     00154
C                                                                       HIST     00155
        IF (CTSR .EQ. CONE) THEN                                        HIST     00156
          CTH(1) = COM                                                  HIST     00157
          STH(1) = SQRT(CONE-COM*COM)                                   HIST     00159
          RA     = RAN(IRAN)                                            HIST     00160
          JAZ    = RA*C360                                              HIST     00161
          CPH(1) = CCH(JAZ+1)                                           HIST     00162
          SPH(1) = SCH(JAZ+1)                                           HIST     00163
        ELSE                                                            HIST     00165
C        _____________________________________________________________  HIST     00172
          CALL FOLD(CTSR,STSR,CPSR,SPSR,COM,CTH(1),STH(1),CPH(1),SPH(1)) HIST     00173
C        -------------------------------------------------------------  HIST     00174
        END IF                                                          HIST     00176
C _____                                                                 HIST     00177
C ... SOURCE POSITION                                                   HIST     00178
C --------------------                                                  HIST     00179
 69     IF (SORCIN .NE. CZERO) THEN                                     HIST     00198
          RA   = RAN(IRAN)                                              HIST     00199
          R    = SQRT(RA)*SORCIN                                        HIST     00200
          RA   = RAN(IRAN)                                              HIST     00201
          JAZ  = RA*C360                                                HIST     00202
          SCHR = SCH(JAZ+1)*R                                           HIST     00203
          CCHR = CCH(JAZ+1)*R                                           HIST     00204
           IF (IDISKS .EQ. 0) THEN
                 X   = XSR + CCHR*W1X+SCHR*W2X
                 Y   = YSR+CCHR*W1Y+SCHR*W2Y
                 Z   = ZSR+CCHR*W1Z+SCHR*W2Z
               ELSE
                  IF(KPERPXY.EQ.1)THEN
                     X = XCENT + CCHR
                         Y = YCENT + SCHR
                         Z = ZCENT
                      END IF
                      IF (KPERPXZ.EQ.1)THEN
                        X = XCENT + CCHR
                        Y = YCENT
                        Z = ZCENT + SCHR
                      END IF
                      IF(KPERPYZ.EQ.1)THEN

                   X = XCENT
                         Y = YCENT + CCHR

                   Z = ZCENT + SCHR

                 END IF

               END IF

             ELSE
          IF (IRECTS .EQ. 0) THEN                                       HIST     00208
          X = XSR                                                       HIST     00209
          Y = YSR                                                       HIST     00210
          Z = ZSR                                                       HIST     00211
```

New Code

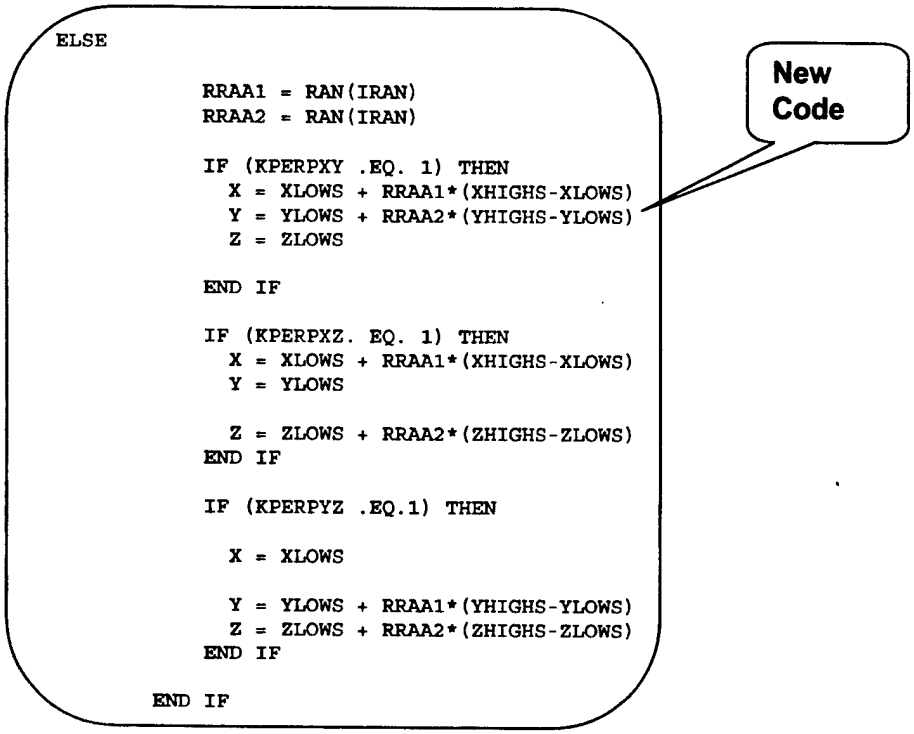


```
      END IF                                                          HIST    00212
C                                                                     HIST    00213
      XB(1) = X                                                       HIST    00220
      XB(2) = Y                                                       HIST    00221
      XB(3) = Z                                                       HIST    00222
      WT(1) = STH(1)*CPH(1)                                           HIST    00223
      WT(2) = STH(1)*SPH(1)                                           HIST    00224
      WT(3) = CTH(1)                                                  HIST    00225
C                                                                     HIST    00226
      CALL ZONEA                                                      HIST    00227
C     ----------                                                      HIST    00228
      LB   = IR                                                       HIST    00229
      LBCZ = IRPRIM                                                   HIST    00230
      IPR = 1                                                         HIST    00232
C                                                                     HIST    00233
C                                                                     HIST    00234
C ... CALL TRACKING ROUTINES                                          HIST    00235
C -------------------------                                           HIST    00236
   70 IF ( FLESRC .OR. (IPR .NE. 1) ) THEN                            HIST    00237
C                                                                     HIST    00238
C ...   PARTICLE TO BE TRACKED IS AN ELECTRON                         HIST    00239
C       ------------------------------------                          HIST    00240
        IF (MT .NE. MAT(LB)) THEN                                     HIST    00241
          MT = MAT(LB)                                                HIST    00242
        END IF                                                        HIST    00248
C                                                                     HIST    00249
        CALL EHIST                                                    HIST    00250
C       ----------                                                    HIST    00251
      ELSE                                                            HIST    00252
C                                                                     HIST    00253
C  ...  PARTICLE TO BE TRACKED IS A PHOTON                            HIST    00254
C       ---------------------------------                             HIST    00255
        LPCZ = LBCZ                                                   HIST    00262
C                                                                     HIST    00265
        CALL PHIST(X,Y,Z,LB,CTH(1),STH(1),CPH(1),SPH(1),T,W,1)        HIST    00266
C       ------------------------------------------------------        HIST    00267
      END IF                                                          HIST    00269
C                                                                     HIST    00270
```

```
C _____________________________________________________________      HIST     00271
C ... REMOVE SECONDARY ELECTRONS FROM STORAGE FOR TRANSPORT          HIST     00272
C -------------------------------------------------------------      HIST     00273
       IF (LAST .NE. 0) THEN                                         HIST     00274
         LB      = LBS(LAST)                                         HIST     00275
         Z       = ZS(LAST)                                          HIST     00276
         T       = TS(LAST)                                          HIST     00277
         NT      = NTS(LAST)                                         HIST     00278
         CTH(1)  = CTHS(LAST)                                        HIST     00279
         W       = WS(LAST)                                          HIST     00280
         IPR     = IPRS(LAST)                                        HIST     00281
C                                                                    HIST     00283
         X       = XS(LAST)                                          HIST     00284
         Y       = YS(LAST)                                          HIST     00285
         STH(1)  = STHS(LAST)                                        HIST     00286
         CPH(1)  = CPHS(LAST)                                        HIST     00287
         SPH(1)  = SPHS(LAST)                                        HIST     00288
C                                                                    HIST     00289
         LBCZ  = LBCS(LAST)                                          HIST     00291
         KLOOP = KLOOP+1                                             HIST     00292
         LAST = LAST-1                                               HIST     00294
         GO TO 70                                                    HIST     00295
       END IF                                                        HIST     00296
C                                                                    HIST     00297
       IF (.NOT. FLPHD) GO TO 1299                                   HIST     00298
C                                                                    HIST     00299
C _____________________________________                              HIST     00300
C ... SCORE PULSE-HEIGHT DISTRIBUTION                                HIST     00301
C -------------------------------------                              HIST     00302
       EABST = CZERO                                                 HIST     00303
       DO 100 LS=LPHDB,LPHDE                                         HIST     00304
         EABST    =  EABST+PHDD(LS)                                 HIST     00305
  100    PHDD(LS) = CZERO                                            HIST     00306
       DO 110 JS=1,JSMAX                                             HIST     00307
         IF(SMARK(JS) .LE. EABST) GO TO 120                          HIST     00308
  110  CONTINUE                                                      HIST     00309
       NPHD = NPHD+1                                                 HIST     00310
       GO TO 1299                                                    HIST     00311
  120  ABE(JS) = ABE(JS)+CWCF                                        HIST     00312
 1299  IF(NINDV.EQ.0)GO TO 130
       DO 1298 NIND=1,NINDV
         EDTL(NIND)=EDPR(NIND)+EDNK(NIND)+EDSC(NIND)
1298  CONTINUE
         WRITE(44)(EDPR(NIND),EDNK(NIND),EDSC(NIND),EDTL(NIND),NIND
     $  =1,NINDV)
          130 CONTINUE                                                 HIST     00313
C _____________________                                              HIST     00314
      CALL RANSAV(IRC)                                               HIST     00315
C     -----------------                                              HIST     00316
      RETURN                                                         HIST     00317
      END                                                            HIST     00318
```

New Code

```
      SUBROUTINE SRCINF(IMXOLD)                                          SRCINF   00002
C ***************************************************************************SRCINF   00003
C                                                                        SRCINF   00004
C     PROGRAM SRCINF IS CALLED BY                                        SRCINF   00005
C                                INPUT                                   SRCINF   00006
C     PROGRAM INPUT CALLS                                                SRCINF   00007
C         INTRINSIC FUNCTIONS                                            SRCINF   00008
C                              MAX,  SIN,  COS,  SQRT                    SRCINF   00009
C         EXTERNAL FUNCTIONS                                             SRCINF   00010
C                              ABORTX                                    SRCINF   00011
C                                                                        SRCINF   00012
C     ORIGINATION DATE     28 NOV 89                                     SRCINF   00013
C     LAST MODIFIED        11 MARCH 91                                   SRCINF   00014
C                                                                        SRCINF   00015
C     FUNCTION                                                           SRCINF   00016
C        This Subroutine processes the SOURCE Information                SRCINF   00017
C                                                                        SRCINF   00018
C     INPUT PARAMETERS                                                   SRCINF   00019
C        IMXOLD  -                                                       SRCINF   00020
C                                                                        SRCINF   00021
C     OUTPUT PARAMETERS                                                  SRCINF   00022
C        NONE                                                            SRCINF   00023
C                                                                        SRCINF   00024
C ***************************************************************************SRCINF   00025
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, STTS                      SRCINF   00026
C$    LIST(S=0)                                                          SRCINF   00027
CDIR$ NOLIST                                                             SRCINF   00028
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)                                CNSTNT   00081
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
                                                                         CNSTNT   00082
C                                                                        PARAMS   00002
C ---------------------------------------------------------------------- PARAMS   00003
C                                                                        PARAMS   00004
```

PARAMS common block identical to that shown in subroutine INPUT

```
C ... I/O UNIT DECLARATIONS AND ARRAY BUFFERS                            PARAMS   00005
      PARAMETER (IIN = 5, IOUT = 6, ITP10 = 10, ITP11 = 11, ITP12 = 12,  PARAMS   00006
     $           ITP14 = 14, MAXKEY = 36)
C                                                                        PARAMS   00008
        COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
      LOGICAL RRKILL, FLMTEL                                             OUT      00002
      COMMON /OUT/                                                       OUT      00003
     1 FLMTEL(INGP)                                                      OUT      00004
C                                                                        OUT      00005
```

New Code

No changes in OUT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00002
      COMMON /CALC/                                                      CALC     00003
     1 ACON(INMT),         ASTEP(INMAX,INMT),     AT(NSURV,INMT),       CALC     00004
```

No changes in CALC common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00139
      LOGICAL DMPFLG, FLMC                                               STTS     00002
      DOUBLE PRECISION IRSAV                                             STTS     00010
      COMMON  /STTS/  IB,  NB,  NSORS, IBT, BOLD, BATCH, KPUTMX, DMPFLG  STTS     00017
     $ ,  IHIST,   IRSAV,  KPUT, FLMC                                    STTS     00018
C                                                                        STTS     00019
C$    LIST(S=1)                                                          SRCINF   00034
CDIR$ LIST                                                               SRCINF   00035
C                                                                        SRCINF   00036
      WRITE(IOUT,'(''1************************''/                        SRCINF   00037
     $           '' *  SOURCE INFORMATION  *''/                         SRCINF   00038
     $           '' ************************'')')                       SRCINF   00039
C                                                                        SRCINF   00040
```

```
      IF (FLESRC) THEN                                                  SRCINF   00041
        WRITE(IOUT,'(''0SOURCE ELECTRONS'')')                           SRCINF   00042
      ELSE                                                              SRCINF   00043
        WRITE(IOUT,'(''0SOURCE PHOTONS'')')                             SRCINF   00044
      END IF                                                            SRCINF   00045
C                                                                       SRCINF   00046
      WRITE(IOUT,'(''0THE MAXIMUM SOURCE ENERGY IS'',T38,F12.5,         SRCINF   00047
     $            '' MEV'')') TIN                                       SRCINF   00048
      WRITE(IOUT,'(''0THE GLOBAL ELECTRON CUTOFF ENERGY IS'',T38,F12.5, SRCINF   00049
     $            '' MEV'')') TCUT                                      SRCINF   00050
      WRITE(IOUT,'(''0THE PHOTON CUTOFF ENERGY IS'',T38,F12.5,          SRCINF   00051
     $            '' MEV'')') TPCUT                                     SRCINF   00052
      IF (TSAVE .GT. TCUT) WRITE(IOUT,'(''0THE GLOBAL ELECTRON TRAP'',  SRCINF   00053
     $            ''PING ENERGY IS'',T38,F12.5,'' MEV'')') TSAVE        SRCINF   00054
C                                                                       SRCINF   00055
      IF (FLSPEC) THEN                                                  SRCINF   00056
        WRITE(IOUT,'(''0SOURCE SPECTRUM'')')                            SRCINF   00057
        WRITE(IOUT,'(12I6)') JSPEC                                      SRCINF   00058
        WRITE(IOUT,'(''0NORMALIZED CUMULATIVE SPECTRUM'')')             SRCINF   00059
        WRITE(IOUT,'(6F12.5)') (SPECIN(J),J=1,JSPEC)                    SRCINF   00060
        IF ((SPECIN(1) .NE. CONE) .OR. (SPECIN(JSPEC) .NE. CZERO)) THEN SRCINF   00061
          WRITE(IOUT,*) ' INPUT CUMULATIVE SOURCE SPECTRUM MUST BE',    SRCINF   00062
     $                  ' MONOTONICALLY DECREASING FROM 1.0 TO 0.0'     SRCINF   00063
C         ______________________                                        SRCINF   00064
          CALL ABORTX('SRCINF')                                         SRCINF   00065
C         ----------------------                                        SRCINF   00066
        END IF                                                          SRCINF   00067
        WRITE(IOUT,'(''0SPECTRAL ENERGIES (MEV)'')')                    SRCINF   00068
        WRITE(IOUT,'(6F12.5)') (ESP(J),J=1,JSPEC)                       SRCINF   00069
C                                                                       SRCINF   00070
      END IF                                                            SRCINF   00071
C
      IF(IRECTS.EQ.0 .AND. IDISKS.EQ.0) THEN
C                                                                       SRCINF   00072
      WRITE(IOUT,'(''0COORDINATES OF THE POINT SOURCE OR OF THE'',      SRCINF   00083
     $            '' CENTER OF THE BEAM (DISK) SOURCE ARE''/            SRCINF   00084
     $            ''     X = '',E12.5,'' CM'',10X,''Y = '',E12.5,       SRCINF   00085
     $            '' CM'',10X,''Z = '',E12.5,'' CM'')')                 SRCINF   00086
     $               XSR, YSR, ZSR                                      SRCINF   00087
      WRITE(IOUT,'(''0THE RADIUS OF THE BEAM (DISK) SOURCE IS = '',     SRCINF   00088
     $             1PE12.4,'' CM'')') SORCIN                            SRCINF   00089
C                                                                       SRCINF   00095
      END IF
C
      WRITE(IOUT,'(''0REFERENCE DIRECTION FOR ANGULAR DISTRIBUTION'',   SRCINF   00090
     $            '' IS DEFINED BY''/''     THETA = '',G11.4,           SRCINF   00091
     $            '' DEGREES'',10X,''PHI = '',G11.4,'' DEGREES'')')     SRCINF   00092
     $               CTSR, CPSR                                         SRCINF   00093

      TEMPA = CTSR/C180PI                                               SRCINF   00096
      CTSR  = COS(TEMPA)                                                SRCINF   00097
      STSR  = SIN(TEMPA)                                                SRCINF   00099
      TEMPA = CPSR/C180PI                                               SRCINF   00100
      CPSR  = COS(TEMPA)                                                SRCINF   00101
      SPSR  = SIN(TEMPA)                                                SRCINF   00102
C
      IF(IRECTS.EQ.1)THEN
          WRITE(IOUT,55)XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,ZHIGHS
55    FORMAT(//1X,'RECTANGULAR PLATE SOURCE,'/5X,'BOUNDING COORDINATES A
     $RE - '/10X,'XLOW = ',E12.5,'   XHIGH = ',E12.5/10X,'YLOW = ',E12.5
     $,'   YHIGH = ',E12.5/10X,'ZLOW = ',E12.5,'   ZHIGH = ',E12.5)
          IF(ABS(XHIGHS-XLOWS).LE.CT1EM7)KPERPYZ=1
          IF(ABS(YHIGHS-YLOWS).LE.CT1EM7)KPERPXZ=1
          IF(ABS(ZHIGHS-ZLOWS).LE.CT1EM7)KPERPXY=1
               KPRPSUM=KPERPYZ+KPERPXZ+KPERPXY
               IF(KPRPSUM.EQ.0 .OR. KPRPSUM.EQ.3)THEN
               WRITE(IOUT,54)
54    FORMAT(///1X,'PROBLEM IN DEFINITION OF SOURCE PLANE ORIENTATION')
            CALL ABORTX('SRCINF')
               END IF
          END IF
```

New Code

New Code

New Code

```
C
      IF(IDISKS.EQ.1)THEN
          WRITE(IOUT,56)XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR
56    FORMAT(//1X,'CIRCULAR DISK SOURCE'/5X,'COORDINATES OF CENTER ARE'/
     $10X,'XCENTER = ',E12.5,'   YCENTER = ',E12.5,'   ZCENTER = ',E12.5
     $//5X,'COORDINATES OF POINT ON CIRCUMFERENCE ARE'/10X,'XCIR = ',
     $E12.5,'   YCIR = ',E12.5,'   ZCIR = ',E12.5)
          IF(ABS(XCENT-XCIR).LE.CT1EM7)KPERPYZ=1
          IF(ABS(YCENT-YCIR).LE.CT1EM7)KPERPXZ=1
          IF(ABS(ZCENT-ZCIR).LE.CT1EM7)KPERPXY=1
               KPRPSUM=KPERPYZ+KPERPXZ+KPERPXY
               IF(KPRPSUM.EQ.0 .OR. KPRPSUM.EQ.3)THEN
               WRITE(IOUT,54)
           CALL ABORTX('SRCINF')
               END IF

C


                    IF(SORCIN.EQ.CZERO)THEN

                    WRITE(IOUT,57)

                    CALL ABORTX('SRCINF')

                    END IF

C


               RSSQQ=SQRT((XCENT-XCIR)**2+(YCENT-YCIR)**2+(ZCENT-ZCIR)**2)
                    IF(ABS(RSSQQ-SORCIN).GT.CT1EM7)THEN

                    WRITE(IOUT,58)

                    CALL ABORTX('SRCINF')

                    ELSE

                    SORCIN=RSSQQ
                    WRITE(IOUT,59)SORCIN
59    FORMAT(/1X,'RADIUS OF THE DISK SOURCE IS ',E12.5)

                    END IF

57    FORMAT(///1X,'SOURCE DISK RADIUS NOT SPECIFIED')
58    FORMAT(///1X,'SOURCE DISK RADIUS INCONSISTENT WITH SPECIFICATION O
     $F POINTS ON CIRCUMFERENCE AND AT CENTER OF SOURCE DISK')


      END IF
C
C                                                                    SRCINF   00103
C     This code block checks to see if the sine of the input polar   SRCINF   00104
C     angle direction is less than zero. If it is, it allows this    SRCINF   00105
C     condition within an acceptable tolerance and changes the sine  SRCINF   00106
C     of the angle to zero; else it aborts.                          SRCINF   00107
C                                                                    SRCINF   00108
      IF (STSR .LT. CZERO) THEN                                      SRCINF   00109
        IF (STSR .GT. -C1EM6) THEN                                   SRCINF   00110
          WRITE (IOUT,'(//,'' >>>> SRCINF: WARNING! SINE OF SOURCE'',SRCINF   00111
     $           '' INPUT POLAR ANGLE DIRECTION IS CHANGED TO ZERO.'')')SRCINF   00112
          STSR = CZERO                                               SRCINF   00113
          CTSR = SIGN(CONE,CTSR)                                     SRCINF   00114
        ELSE                                                         SRCINF   00115
          WRITE (IOUT,'(//,'' >>>> THE INPUT POLAR ANGLE WITH THE'',SRCINF   00116
     $           '' DIRECTION KEYWORD MUST BE BETWEEN ZERO AND 180'',SRCINF   00117
     $           '' DEGREES.'')')                                    SRCINF   00118
C          ______________________                                    SRCINF   00119
           CALL ABORTX('SRCINF')                                     SRCINF   00120
C          ----------------------                                    SRCINF   00121
        END IF                                                       SRCINF   00122
      END IF                                                         SRCINF   00123
```

New Code

```
C                                                                       SRCINF   00124
C                                                                       SRCINF   00125
      IF(IRECTS.EQ.0 .AND. IDISKS.EQ.0) THEN                            SRCINF   00126
      WSRX = STSR*CPSR                                                  SRCINF   00127
      WSRY = STSR*SPSR                                                  SRCINF   00128
      WSRZ = CTSR                                                       SRCINF   00129
C     ---------------------------------                                 SRCINF   00130
C ... USUALLY W1(V) = R(V) X OMEGA(V)                                   SRCINF   00131
C     ---------------------------------                                 SRCINF   00132
      W1X  = YSR*WSRZ - ZSR*WSRY                                        SRCINF   00133
      W1Y  = ZSR*WSRX - XSR*WSRZ                                        SRCINF   00134
      W1Z  = XSR*WSRY - YSR*WSRX                                        SRCINF   00135
      XNRM = W1X*W1X + W1Y*W1Y + W1Z*W1Z                                SRCINF   00136
C     ----------------------------                                      SRCINF   00137
C ... UNLESS R(V) X OMEGA(V) = 0                                        SRCINF   00138
C     ----------------------------                                      SRCINF   00139
      IF (XNRM .EQ. CZERO) THEN                                         SRCINF   00140
C      -------------------------------------                            SRCINF   00141
C ...   IF I(V) * OMEGA(V) = 0, W1(V) = I(V)                            SRCINF   00142
C      -------------------------------------                            SRCINF   00143
        IF (WSRX .EQ. CZERO) THEN                                       SRCINF   00144
          W1X = CONE                                                    SRCINF   00145
          W1Y = CZERO                                                   SRCINF   00146
          W1Z = CZERO                                                   SRCINF   00147
C        --------------------------------------                         SRCINF   00148
C ...     IF J(V) * OMEGA(V) = 0, W1(V) = J(V)                          SRCINF   00149
C        --------------------------------------                         SRCINF   00150
        ELSE IF (WSRY .EQ. CZERO) THEN                                  SRCINF   00151
          W1X = CZERO                                                   SRCINF   00152
          W1Y = CONE                                                    SRCINF   00153
          W1Z = CZERO                                                   SRCINF   00154
C        --------------------------------------                         SRCINF   00155
C ...     IF K(V) * OMEGA(V) = 0, W1(V) = K(V)                          SRCINF   00156
C        --------------------------------------                         SRCINF   00157
        ELSE IF (WSRZ .EQ. CZERO) THEN                                  SRCINF   00158
          W1X = CZERO                                                   SRCINF   00159
          W1Y = CZERO                                                   SRCINF   00160
          W1Z = CONE                                                    SRCINF   00161
C        ----------------------------------------                       SRCINF   00162
C ...     OTHERWISE, W1(V) = +OR- K(V) X OMEGA(V)                       SRCINF   00163
C        ----------------------------------------                       SRCINF   00164
        ELSE                                                            SRCINF   00165
          W1Z = CZERO                                                   SRCINF   00166
          W1X = CONE/SQRT(CONE + (WSRX/WSRY)**2)                        SRCINF   00167
          W1Y = -W1X*WSRX/WSRY                                          SRCINF   00168
        END IF                                                          SRCINF   00169
      ELSE                                                              SRCINF   00170
        XNRM = SQRT(XNRM)                                               SRCINF   00171
        W1X  = W1X/XNRM                                                 SRCINF   00172
        W1Y  = W1Y/XNRM                                                 SRCINF   00173
        W1Z  = W1Z/XNRM                                                 SRCINF   00174
      END IF                                                            SRCINF   00175
C                                                                       SRCINF   00176
      W2X = WSRY*W1Z - WSRZ*W1Y                                         SRCINF   00177
      W2Y = WSRZ*W1X - WSRX*W1Z                                         SRCINF   00178
      W2Z = WSRX*W1Y - WSRY*W1X                                         SRCINF   00179
      XSR = XSR + CT1EM7*WSRX                                           SRCINF   00180
      YSR = YSR + CT1EM7*WSRY                                           SRCINF   00181
      ZSR = ZSR + CT1EM7*WSRZ                                           SRCINF   00182
      IF (SORCIN .EQ. CZERO) THEN                                       SRCINF   00183
        XSR = XSR+CT1EM7*W1X                                            SRCINF   00184
        YSR = YSR+CT1EM7*W1Y                                            SRCINF   00185
        ZSR = ZSR+CT1EM7*W1Z                                            SRCINF   00186
      END IF                                                            SRCINF   00187
C                                                                       SRCINF   00188
      END IF                                                            SRCINF   00189
C                                                                       SRCINF   00190
      IF (ICTH .EQ. 1) THEN                                             SRCINF   00191
        WRITE(IOUT,'(''0MONODIRECTIONAL SOURCE IN REFERENCE'',          SRCINF   00192
     $                 '' DIRECTION'')')                               SRCINF   00193
      ELSE IF (ICTH .EQ. 2) THEN                                        SRCINF   00194
        WRITE(IOUT,'(''0ISOTROPIC SOURCE TRUNCATED AT '',G11.4,         SRCINF   00195
     $         '' DEGREES WITH RESPECT TO REFERENCE DIRECTION'')') CTHIN SRCINF   00196
        CTHIN = COS(CTHIN/C180PI)                                       SRCINF   00197
      ELSE                                                              SRCINF   00198
        WRITE(IOUT,'(''0COSINE-LAW SOURCE TRUNCATED AT '',G11.4,        SRCINF   00199
     $         '' DEGREES WITH RESPECT TO REFERENCE DIRECTION'')') CTHIN SRCINF   00200
        CTHIN = COS(CTHIN/C180PI)**2                                    SRCINF   00201
      END IF                                                            SRCINF   00202
C                                                                       SRCINF   00203
      IF (NB .LE. 0)       NB = 10                                      SRCINF   00204
      IF (IMAX .LT. NB) IMAX = NB                                       SRCINF   00205
      IMAX = IMAX/NB                                                    SRCINF   00206
C                                                                       SRCINF   00207
```

New Code

New Code

```
      IF ((IBT .NE. 0) .AND. (IMAX .NE. IMXOLD)) THEN                    SRCINF   00205
C                                                                        SRCINF   00206
C     ... BATCH SIZES INCONSISTENT ON RESTART - TERMINATE RUN            SRCINF   00207
C                                                                        SRCINF   00208
         WRITE(IOUT,'(''0*** FATAL ERROR ON ATTEMPTED RESTART ***''/     SRCINF   00209
     $    '' NEW BATCH SIZE = '',I10,'' DOESNT EQUAL OLD BATCH SIZE = '',SRCINF   00210
     $    I10/'' BATCH SIZES MUST MATCH TO CORRECTLY ACCUMULATE'',       SRCINF   00211
     $    '' STATISTICS'' )') IMAX, IMXOLD                               SRCINF   00212
C                                                                        SRCINF   00213
        CALL ABORTX('SRCINF')                                            SRCINF   00214
C       ---------------------                                            SRCINF   00215
      END IF                                                             SRCINF   00216
C                                                                        SRCINF   00217
      NB = NB + IBT                                                      SRCINF   00218
      WRITE(IOUT,'(''0THE STANDARD ERROR ESTIMATES ARE BASED ON '',I5,   SRCINF   00219
     $             '' BATCHES OF '',I7,'' HISTORIES EACH'')') NB,IMAX    SRCINF   00220
C                                                                        SRCINF   00221
      RETURN                                                             SRCINF   00222
C                                                                        SRCINF   00223
      END                                                                SRCINF   00224
C                                                                        SRCINF   00225
```

```
      SUBROUTINE KEYMAP(INDX,FLDUP)                                      KEYMAP   00003
C ***************************************************************************KEYMAP   00004
C                                                                        KEYMAP   00005
C     SUBROUTINE KEYMAP IS CALLED BY                                     KEYMAP   00006
C                                  INPUT                                 KEYMAP   00007
C     SUBROUTINE KEYMAP CALLS                                            KEYMAP   00008
C         INTRINSIC FUNCTIONS                                            KEYMAP   00009
C                                                                        KEYMAP   00010
C         EXTERNAL FUNCTIONS                                             KEYMAP   00011
C                                                                        KEYMAP   00012
C                                                                        KEYMAP   00013
C     ORIGINATION DATE     15 AUG 90                                     KEYMAP   00014
C     LAST MODIFIED        11 MARCH 91                                   KEYMAP   00015
C                                                                        KEYMAP   00016
C     FUNCTION                                                           KEYMAP   00017
C        This subroutine contains the INPUT Primary Keyword mapping.     KEYMAP   00018
C        It takes the "indx" of the keyword list array as input and      KEYMAP   00019
C        returns the status of the duplicate keyword flag, "fldup".      KEYMAP   00020
C                                                                        KEYMAP   00021
C     INPUT PARAMETERS                                                   KEYMAP   00022
C        INDX    - Index of the keyword list array                       KEYMAP   00023
C                                                                        KEYMAP   00024
C     OUTPUT PARAMETERS                                                  KEYMAP   00025
C        FLDUP   - Status of the duplicate keyword flag                  KEYMAP   00026
C                                                                        KEYMAP   00027
C ***************************************************************************KEYMAP   00028
C *** COMMON BLOCKS CNSTNT, PARAMS                                       KEYMAP   00029
C$    LIST(S=0)                                                          KEYMAP   00030
CDIR$ NOLIST                                                             KEYMAP   00031
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)                                CNSTNT   00081
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
                                                                         CNSTNT   00082
C                                                                        PARAMS   00002
C ------------------------------------------------------------------------ PARAMS   00003
C                                                                        PARAMS   00004
```

PARAMS common block identical to that shown in subroutine INPUT

```
C$    LIST(S=1)                                                          KEYMAP   00034
CDIR$ LIST                                                               KEYMAP   00035
C                                                                        KEYMAP   00036
      CHARACTER*17 OKEYLS(MAXKEY)                                        KEYMAP   00037
      LOGICAL FLDUP                                                      KEYMAP   00038
C                                                                        KEYMAP   00039
      DATA OKEYLS /'BATCHES', 'CUTOFFS',                                 KEYMAP   00040
     $             'DIRECTION', 'DUMP', 'ECHO',                          KEYMAP   00041
     $             'ELECTRONS', 'ELECTRON-ESCAPE', 'ELECTRON-FLUX',      KEYMAP   00042
     $             'ENERGY', 'GEOMETRY', 'HISTORIES', 'NEW-DATA-SET',    KEYMAP   00043
     $             'NEXT-EVENT-ESCAPE', 'NO-KNOCKONS', 'NO-STRAGGLING',  KEYMAP   00044
     $             'PHOTONS', 'PHOTON-ESCAPE', 'PHOTON-FLUX', 'PLOTS',   KEYMAP   00045
     $             'POSITION', 'PRINT-ALL', 'PULSE-HEIGHT',              KEYMAP   00046
     $             'RANDOM-NUMBER', 'RESTART', 'SCALE-BREMS',            KEYMAP   00047
     $             'SCALE-IMPACT', 'SIMPLE-BREMS', 'SPECTRUM', 'TITLE',  KEYMAP   00048
     $             'TRAP-ELECTRONS', 'NO-COHERENT', 'NO-INCOH-BINDING',  KEYMAP   00049
C    $             'DETAIL-IONIZE'/                                      KEYMAP   00050
     $             'DETAIL-IONIZE','RECTANGLE-SOURCE','CIRCLE-SOURCE',
     $             'INDIVIDUAL-HISTS'/
     C                                                                   KEYMAP   00051
C     Print that the keyword pointed to by INDX is a duplicate entry     KEYMAP   00052
C                                                                        KEYMAP   00053
      WRITE(IOUT,'('' >>>> KEYMAP: DUPLICATE INPUT KEYWORD: '', (A))')   KEYMAP   00054
     $      OKEYLS(INDX)                                                KEYMAP   00055
      IF (.NOT. FLDUP) FLDUP = .TRUE.                                    KEYMAP   00056
C                                                                        KEYMAP   00057
      RETURN                                                             KEYMAP   00058
      END                                                                KEYMAP   00059
```

New Code

APPENDIX 3

count.F Program Listing

```
      parameter (maxhis = 10000)
      parameter (mxclls = 2)
      dimension edep(200),nelec(200),nprot(200),nneut(200),nphot(200)
     1,edelec(200),edprot(200),edphot(200),edneut(200),iesc(10),

     2numcoin(3),koinc(3,mxclls),kcell(mxclls)
      dimension nhcoin(maxhis,3),npart(3)
      data npart/9,1,2/
      data kcell/67,88/
      data eps/1.e-8/
         data ntime,nw8win,nclimp,nwcut,nh,iesc,numcoin/18*0/
      data eesc,elostot/0.0,0.0/
      data edeptot,eprtot,ephtot,edntot,edeltot/5*0./
      data edep,edprot,edphot,edelec,edneut/1000*0./
      data nelec,nprot,nneut,nphot/800*0/
      open(1,file='trkbin',status='unknown',form='UNFORMATTED')
      open(7,file='countups',status='unknown')
         print 77
         read(5,*)nmax
77    format(1x,'Enter number of histories')
 111  format(1x,'problem in track file')
c     start a history
      do 18 i=1,3
      do 18 k=1,mxclls
 18   koinc(i,k)=0
 20   nh=nh+1
      lflag=0
         elost=0.0
      if(nh.gt.nmax)go to 2000
      read(1,end=2000)nhstry,nstart
      read(1)nevent,nsrc,ipt,ncell,mat,xs,ys,zs,us,vs,ws,es,wt,time
      do 25 nc=1,mxclls
      do 25 i=1,3
       np=npart(i)
 25   if(ipt.eq.np .and. ncell.eq.kcell(nc)) koinc(i,nc)=koinc(i,nc)+1
      ec=es
      iptold=ipt
      ncold=ncell
      oldtim=time
c     read event records
 1000 read(1)nevent,nsurf,i1,ipt,ncell,mat,x,y,z,u,v,w,e,wt,time
      do 26 nc=1,mxclls
      do 26 i=1,3
       np=npart(i)
 26   if(ipt.eq.np .and. ncell.eq.kcell(nc)) koinc(i,nc)=koinc(i,nc)+1
      if(i1.eq.0.and.lflag.gt.0)elost=elost-e*wt
         nter=0
         de=ec-e
      dt=time-oldtim
      if(nevent.eq.9000)then
         nter=nsurf
```

```
          nbrnch=i1
        if (nter.eq.1)then
        iesc(ipt)=iesc(ipt)+1
        eesc=eesc+e*wt/nmax

          go to 20
       end if
          if(nter.gt.2)then
          if(nter.eq.3)ntime=ntime+1
          if(nter.eq.4)nw8win=nw8win+1
          if(nter.eq.5)nclimp=nclimp+1
          if(nter.eq.6)nwcut=nwcut+1
          end if
        end if
          if(nevent.ge.2000. and. nevent.lt.3000)then
           nter=nsurf
          if(nter.gt.12.and.nter.lt.15)then
           lflag=lflag+1
           elost=elost+e
        end if
        if(nter.eq.1)then
        iesc(ipt)=iesc(ipt)+1
        eesc=eesc+e*wt/nmax
        go to 19
        end if
        end if
        if(nter.eq.2)de=ec-e
         if(ipt.eq.iptold .and. dt.ge.eps.and.de.ge.eps)then
c       energy deposition by charged particle CSDA or neutral particle
c       inelastic collision
              edep(ncold)=edep(ncold)+de*wt
c       electron
              if(ipt.eq.3)then
                   nelec(ncold)=nelec(ncold)+1
                   edelec(ncold)=edelec(ncold)+de*wt
              end if
c       proton
              if(ipt.eq.9)then
                  nprot(ncold)=nprot(ncold)+1
                  edprot(ncold)=edprot(ncold)+de*wt
              end if
c       neutron
              if(ipt.eq.1)then
                  nneut(ncold)=nneut(ncold)+1
                  edneut(ncold)=edneut(ncold)+de*wt
              end if
c       photon
              if(ipt.eq.2)then
                 nphot(ncold)=nphot(ncold)+1
                 edphot(ncold)=edphot(ncold)+de*wt
              end if
        end if
   19   iptold=ipt
        ec=e
        oldtim=time
        ncold=ncell
          if(nevent.eq.9000)then
```

```
      elostot=elostot+elost
      do 220 k=1,3
      do 219 nc=1,mxclls
219   if(koinc(k,nc).eq.0)go to 220
        numcoin(k)=numcoin(k)+1
        ll=numcoin(k)
        nhcoin(ll,k)=nh
220   continue
      do 221 k=1,3
      do 221 nc=1,mxclls
221   koinc(k,nc)=0
         go to 20
         end if
      go to 1000
2000  continue
      elostot=elostot/nmax
      do 2100 m=1,200
      edep(m)=edep(m)/nmax
      edprot(m)=edprot(m)/nmax
      edphot(m)=edphot(m)/nmax
      edneut(m)=edneut(m)/nmax
      edelec(m)=edelec(m)/nmax
         edeptot=edeptot+edep(m)
         eprtot=eprtot+edprot(m)
         ephtot=ephtot+edphot(m)
         edntot=edntot+edneut(m)
         edeltot=edeltot+edelec(m)
2100  write(7,112)m,edep(m),nprot(m),edprot(m),nelec(m),edelec(m),.
     1nneut(m),edneut(m),nphot(m),edphot(m)
         edeptot=edeptot+elostot
      write(7,119)(iesc(i),i=1,10),eesc
         write(7,114)edeptot,eprtot,ephtot,edntot,edeltot,elostot,
     $numcoin(1),numcoin(2),numcoin(3)
      do 300 k=1,3
      maxk=numcoin(k)
      if(k.eq.1)write(7,302)
      if(k.eq.2)write(7,303)
      if(k.eq.3)write(7,304)
      write(7,301)(nhcoin(m,k),m=1,maxk)
300    continue
301   format(15i8)
302   format(/1x,'history numbers for proton coincidence events')
303   format(/1x,'history numbers for neutron coincidence events')
304   format(/1x,'history numbers for photon coincidence events')
114   format(1x,'total energy deposited = ',e12.5/10x,'from protons = ',
     xe12.5,/10x,'from photons = ',e12.5/10x,'from neutrons = ',e12.5/
     x10x,'from electrons = ',e12.5,/10x,'from inelastic collisions='
     $,e12.5/10x,'number of proton coincidence events =',i5
     $/10x,'number of neutron coincidence events =',i5
     $/10x,'number of photon coincidence events =',i5)
119   format(1x,'no. of escaped particles =',10i6,/1x,
     $' escaped energy =',e12.5)
112   format(1x,i5,e12.5,4(i15,e12.5))
      stop
      end
```

APPENDIX 4

source.F Program Listing for MCNPX Beam Source Allowing for User-supplied Location, Direction, Energy, Particle Specie

```
c_deck so source                                                          so
1
      subroutine source                                                   so
2
c   user supplied source subroutine
#include "cm.h"
c
      data issty/0/
      if(issty.eq.0)then
      wgt=1.0
      tme=0.0
      write(jtty,1)
      read(itty,*)xxx,yyy,zzz
      write(jtty,2)
      read(itty,*)uuu,vvv,www
      aa=sqrt(uuu**2+vvv**2+www**2)
      uuu=uuu/aa
      vvv=vvv/aa
      www=www/aa
      write(jtty,7)
      read(itty,*)ipt
      write(jtty,3)
      read(itty,*)erg
      write(jtty,4)
      read(itty,*)jsu
      write(jtty,5)
      read(itty,*)icl
      write(47)wgt,tme,xxx,yyy,zzz,uuu,vvv,www,erg,ipt,jsu,icl
      print 6,xxx,yyy,zzz,uuu,vvv,www,icl,jsu,ipt,erg,wgt,tme
      write(iuo,8)
      write(iuo,6)xxx,yyy,zzz,uuu,vvv,www,icl,jsu,ipt,erg,wgt,tme
      write(iuo,9)
      issty=1
      else
      rewind 47
      read(47)wgt,tme,xxx,yyy,zzz,uuu,vvv,www,erg,ipt,jsu,icl
      do 50 ispr=1,3
 50   spare(ispr)=0.0
      end if
 1    format(1x,'Enter the source point (x,y,z)')
 2    format(1x,'Enter the source beam direction cosines (u,v,w)')
 3    format(1x,'Enter the source energy (MeV)')
 4    format(1x,'If this is a surface source, enter surface number'/
     $1x, 'if not, enter 0')
 5    format(1x,'Enter the cell number containing the source point')
 7    format(1x,'Enter particle type (ipt)')
 6    format(1x,'User-supplied source'/1x,'xxx = ',e12.5,' yyy = ',e12.5
     $,' zzz = ',e12.5/1x,'uuu = ',e12.5,' vvv = ',e12.5,' www = ',e12.5
     $/1x,'icl = ',i5,' jsu = ',i5,' ipt = ',i5/1x,'erg = ',e12.5,
     $' wgt = ',e12.5,' time = ',e12.5)
 8    format(/////1x,'*****************************************',
     $          1x,'*****************************************',
     $          1x,'*****************************************'/)
 9    format(/    1x,'*****************************************',
     $          1x,'*****************************************',
     $          1x,'*****************************************'/////)
      return
      end                                                                 so
13
```

APPENDIX 5

ITS-ACCEPT Input File for the CEASE-DD1 Dosimeter

```
  10 MEV DOME SOURCE FLAT DOSIMETER TEST -DD1
********************** GEOMETRY ************************
GEOMETRY
*1
  RCC   0.0   0.0   -0.2032   0.0   0.00000  0.2032   1.75514
*2
  RCC   0.0   0.0   -0.36068  0.0    .00000  0.15748  1.75514
*3
  RCC   0.0   0.0   -0.36158  0.0    .00000  0.00090  1.75514
*4
  RCC   0.0   0.0   -0.38158  0.0    .00000  0.02000  1.75514
*5
  RCC   0.0   0.0   -0.45158  0.0    .00000  0.07000  1.75514
*6
  RCC   0.0   0.0   -0.55158  0.0    .00000  0.10000  1.75514
*7
  RCC   0.0   0.0   -0.70400  0.0    .00000  0.15242  1.75514
*8
  RCC   0.0   0.0   -1.20400  0.0    .00000  0.50000  1.75514
*9
  RCC   0.0   0.0   -0.2032   0.0   0.00000  0.2032   1.76
*10
  RCC   0.0   0.0   -0.36068  0.0    .00000  0.15748  1.76
*11
  RCC   0.0   0.0   -0.36158  0.0    .00000  0.00090  1.76
*12
  RCC   0.0   0.0   -0.38158  0.0    .00000  0.02000  1.76
*13
  RCC   0.0   0.0   -0.45158  0.0    .00000  0.07000  1.76
*14
  RCC   0.0   0.0   -0.55158  0.0    .00000  0.10000  1.76
*15
  RCC   0.0   0.0   -0.70400  0.0    .00000  0.15242  1.76
*16
  RCC   0.0   0.0   -1.20400  0.0    .00000  0.50000  1.76
*17
  RPP  -0.85  0.85   -0.85  0.85  -0.36158  -.36068
*18
  RPP  -0.6477  0.6477  -0.6477  0.6477  -0.38158  -0.36158
*19
  RPP  -0.85  0.85   -0.85  0.85  -0.38158  -.36158
*20
  RPP  -0.45  0.45   -0.45  0.45  -0.45158  -0.38158
*21
  RPP  -0.6477  0.6477  -0.6477  0.6477   -0.45158  -0.38158
*22
  RPP  -0.85  0.85   -0.85  0.85  -0.45158  -0.38158
*23
  RPP  -0.6342  0.6342  -0.6342  0.6342  -0.55158  -0.45158
*24
  RPP  -0.6477  0.6477  -0.6477  0.6477  -0.55158  -0.45158
*25
  RPP  -0.85    0.85    -0.85    0.85    -0.55158  -0.45158
*26
  RPP  -0.6477  0.6477  -0.6477  0.6477  -0.70400  -0.55158
*27
  RPP  -0.85    0.85    -0.85    0.85    -0.70400  -0.55158
*28
  SPH   0.0   0.0   0.0  1.75514
*29
  SPH   0.0   0.0   0.0  1.76
*30
  RCC   0.0   0.0   0.0       0.0   0.00000  1.76   1.75514
*31
  RCC   0.0   0.0   0.0       0.0   0.00000  1.76   1.76
*32
  SPH   0.0   0.0  0.0  5.0
*33
  SPH   0.0   0.0   0.0       10.0
```

```
  END

*VOID
  Z01 +1
  Z02 +2
  Z03 +17
  Z04 +3 -17
  Z05 +11 -3 -17
  Z06 +18
  Z07 +19 -18
  Z08 +4 -19 -18
  Z09 +12 -4 -19 -18
  Z10 +20
  Z11 +21 -20
  Z12 +22 -21 -20
  Z13 +5 -22  -21 -20
  Z14 +13 -5  -22 -21 -20
  Z15 +23
  Z16 +24 -23
  Z17 +25 -24 -23
  Z18 +6 -25 -24 -23
  Z19 +14 -6 -25 -24 -23
  Z20 +26
  Z21 +27 -26
  Z22 +7 -27 -26
  Z23 +15 -7 -27 -26
  Z24  +8
  Z25  +16 -8
  Z26  +28 +30
  Z27  +29 +31 -28
  Z28  +30 -29
  Z29  +9 -1
  Z30  +10 -2
  Z31 +31 -1 -2 -3 -4 -5 -6 -7 -8 -9 -10 -11 -12 -13 -14
      -15 -16 -17 -18 -19 -20 -21 -22 -23 -24 -25 -26 -26
      -28 -29 -30
  Z32 +32 -31
END
*MATERIAL

 1                                                    1
 0                                                    0
 0                                                    0
 1                                                    1
 0                                                    1
 0                                                    0
 0                                                    0
 1                                                    0
 0                                                    0
 0                                                    0
 2                                                    0
 0                                                    0
 1                                                    0
 0                                                    0
 0                                                    0
 3                                                    0
 0

********************** SOURCE ********************
ELECTRONS
SPECTRUM 11
  1.0000    .9553    .9062    .8559    .8046    .7508    .6932    .6312
   .5627    .4573    0.0
 10.0000  9.2000  9.1000  9.0000  8.9000  8.6000  8.3000  8.0000
  7.5000  5.0000  0.0
*********************  OPTIONS  ******************
PULSE-HEIGHT 10  10
   NBINE 102
DOME-SOURCE  0. 0. 0.0 1.755
*********************  OPTIONS  ******************
HISTORIES 10000
```

Two column format used here to conserve space

This is the hemispherical dome source option as depicted in Figure 15. For the flat disc source option depicted in Figure 14, this line must be replaced with

```
CIRCLE-SOURCE  0. 0. -0.01 1.755  0. -0.01
  RADIUS 1.755
     DIRECTION 180.0
ISOTROPIC
```

APPENDIX 6

MCNPX Input File for the CEASE-DD2 Dosimeter

```
CEASE DD2 dosimeter MCNPX, electrons, isotropic source on hemispherical void
C       Cells
C     Silicon Dosimeter DD2
1     2 -2.33 23 -25 22 -24 6 -5
C     Voids surrounding DD2
2     0 15 -17 14 -16 6 -5 #1
3     0 15 -17 14 -16 7 -6 #5
4     0 15 -17 14 -16 6 5 -4
c     Aluminum Oxide substrate
5     3 -3.97  19 -21 18 -20 7 -6
c     Aluminum base
6     1 -2.7 15 -17 14 -16 8 -7
c     Aluminum sides
7     1  -2.7  11 -13 10 -14 8 -4
8     1  -2.7  11 -13 16 -12 8 -4
9     1  -2.7  11 -15 14 -16 8 -4
10    1  -2.7  17 -13 14 -16 8 -4
c     Al foil
11    1  -2.7  11 -13 10 -12 4 -3
c     void cylinder above foil
12    0   -26 3 -2
c     Al cover plate
13    1  -2.7  2 -1 -26
c     Void cylinder around box
14    0  8 -3 -26 #1 #2 #3 #4 #5 #6 #7 #8 #9 #10 #11
c     Void cylinder below box
15    0  9 -8 -26
c     Void hemispherical region above plate
16    0  1 -27
c     Hemispherical void region enclosing upper half(dome)
17    0  27 -28 1
c     Spherical void region enclosing everything
18    0  -29  #1 #2 #3 #4 #5 #6 #7 #8 #9 #10 #11 #12 #13 #14 #15 #16
             #17
c     exterior void escape region
19    0    #18

c      Surfaces
1       pz  0.0
2       pz  -0.635
3       pz  -0.79248
4       pz  -0.79338
5       pz  -0.81338
6       pz  -0.88338
7       pz  -0.98338
8       pz  -1.1358
9       pz  -1.6358
10      py  -0.85
11      px  -0.85
12      py   0.85
13      px   0.85
14      py  -0.6477
15      px  -0.6477
16      py   0.6477
17      px   0.6477
18      py  -0.6342
19      px  -0.6342
20      py   0.6342
```

```
21      px   0.6342
22      py  -0.45
23      px  -0.45
24      py   0.45
25      px   0.45
26      cz  1.79578
27      so  1.79578
28      so  1.8
29      so  3.0
c

c    Transport electrons and photons
mode    e  p
c    Source  is defined by subroutine "sourcedd2.F" (which must be renamed
c            to "source.F")
c   no. of histories
nps    10000
c
c      electron cutoff energy = 0.5 MeV
cut:e      1.e+10  0.5
c      photon cutoff energy = 10 keV
cut:p      1.e+10  0.01
c
c     materials
c
c     aluminum
M1      13027 -1.0
C       Silicon
M2      14000 -1.0
C       Aluminum Oxide
M3      13027  -0.529251  8016  -0.470749
C       Kel-F  (chlorotrifluoroethylene  C2ClF3)
M4      6000  -0.20625  17000  -0.30440  9019  -0.48935
c
c      maximum electron energy(MeV) needed for cross sections
phys:e  12.
c      maximum photon energy(MeV) needed for cross sections
phys:p  12.
c   tallies
c     energy deposition (MeV) tally
*F18:e    1  5 13
c    pulse height tally
F48:e     1  5 13
E48     0 1.e-5 .1 97I 9.9 9.99999 10.
c      cell importances for electrons
imp:e   1 17R  0
c      cell importances for photons
imp:p   1 17R 0
```

APPENDIX 7

ITS-ACCEPT Subroutine Modifications for Dome Source Option - Code Listings -

```
    SUBROUTINE INPUT                                                        INPUT    00007
C ***************************************************************************INPUT    00009
C                                                                           INPUT    00010
C     PROGRAM INPUT IS CALLED BY                                            INPUT    00011
C                                ITS                                        INPUT    00012
C     PROGRAM INPUT CALLS                                                   INPUT    00013
C         INTRINSIC FUNCTIONS                                               INPUT    00014
C                               REAL          (TIGER & CYLTRAN)           INPUT    00015
C                               SQRT, ABS     (ACCEPT)                    INPUT    00016
C         EXTERNAL FUNCTIONS                                                INPUT    00017
C                               ALIST,  ELIST,  START,  PREP, KOP,          INPUT    00018
C                               REQALL, GEOMIN, SCRINF, OPOPTS              INPUT    00019
C                               KEYMAP, OPREAD                              INPUT    00020
C                               JOGEN   (ACCEPT)                            INPUT    00021
C                                                                           INPUT    00022
C     ORIGINATION DATE      12 DEC 67.                                      INPUT    00023
C     LAST MODIFIED         17 MAY 91                                       INPUT    00024
C                                                                           INPUT    00025
C     FUNCTION                                                              INPUT    00026
C        THIS PROGRAM IS USED TO READ AND PROCESS USER-SUPPLIED             INPUT    00027
C        CARD INPUT                                                         INPUT    00028
C                                                                           INPUT    00029
C ***************************************************************************INPUT    00030
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, XPED, STTS, SCALE, PLTITLINPUT    00031
C                   PAREM, GOMLOC (ACCEPT)                                  INPUT    00032
C                   FLUOR         (PCODES)                                  INPUT    00033
C                   PLOT          (PLOTS)                                   INPUT    00034
C$    LIST(S=0)                                                             INPUT    00035
```

•
•
•

Code listing omitted here is identical to that given in Appendix 2

•
•
•

```
C$    LIST(S=1)                                                             INPUT    00051
CDIR$ LIST                                                                  INPUT    00052
      COMMON  /SCALE/  BNUM, XNUM                                           SCALE    00002
        COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
     $  IDOME,RDOME
C                                                                           SCALE    00003
C                                                                           INPUT    00057
       COMMON /HITS/EDPR(10),EDNK(10),EDSC(10),EDTL(10),LHCL(10),NINDV
```

New Code

•
•

•

Code listing omitted here is identical to that given in Appendix 2

•
•
•

```
      NPRTCL = 1                                                    INPUT    00153
C
      IRECTS = 0
        IDISKS = 0
        KPERPYZ = 0
        KPERPXZ = 0
        KPERPXY = 0
        IDOME = 0
C
      NINDV=0
        DO 599 J=1,10
599   LHCL(J)=0
C                                                                   INPUT    00154
      TITLE  = ' '                                                  INPUT    00155
      NPRT   = 12                                                   INPUT    00156
      IECHO  = 0                                                    INPUT    00157
      NB     = 10                                                   INPUT    00158
      IMAX   = 1000                                                 INPUT    00159
      IBT    = 0                                                    INPUT    00160
      MBSC   = 1                                                    INPUT    00161
      BOLD   = CZERO                                                INPUT    00162
      IMXOLD = 0                                                    INPUT    00163
      INRAN  = CZERO                                                INPUT    00168
      BASE   = CTWO                                                 INPUT    00170
      XNCYC  = CEIGHT                                               INPUT    00171
      TMFAC  = BASE**(-1.0/XNCYC)                                   INPUT    00172
      DMPFLG = .FALSE.                                              INPUT    00173
C                                                                   INPUT    00174
C ... INITIALIZE LOGICALS FOR IDENTIFYING MATERIALS (NON-P CODES) OR INPUT    00175
C     ELEMENTS (P CODES) THAT ARE PRESENT IN A GIVEN PROBLEM - USED INPUT    00176
C     FOR IDENTIFYING RELEVANT LINE RADIATION.                      INPUT    00177
      NGP = NMT                                                     INPUT    00182
      DO 60 J=1,NGP                                                 INPUT    00184
   60   FLMTEL(J) = .FALSE.                                         INPUT    00185
C                                                                   INPUT    00186
      NPLOTS  = 0                                                   INPUT    00188
C     ------------------                                            INPUT    00193
C ... SOURCE VARIABLES                                              INPUT    00194
C     ------------------                                            INPUT    00195
      FLESRC = .TRUE.                                               INPUT    00196
      JSPEC  = 0                                                    INPUT    00197
      FLSPEC = .FALSE.                                              INPUT    00198
      TIN    = CONE                                                 INPUT    00199
      TPCUT  = C1EM2                                                INPUT    00200
      TCUT   = CZERO                                                INPUT    00201
      TSAVE  = CZERO                                                INPUT    00202
      ICTH   = 1                                                    INPUT    00203
      CTSR   = CZERO                                                INPUT    00204
      CTHIN  = C90                                                  INPUT    00205
      ZSR    = CZERO                                                INPUT    00210
      XSR    = CZERO                                                INPUT    00213
      YSR    = CZERO                                                INPUT    00214
      CPSR   = CZERO                                                INPUT    00215
      SORCIN = CZERO                                                INPUT    00216
C     --------------------------                                    INPUT    00218
C ... ELECTRON ESCAPE VARIABLES                                     INPUT    00219
C     --------------------------                                    INPUT    00220
```

New Code

```
      JMAX  = 10                                                        INPUT    00221
      FLESC = .FALSE.                                                   INPUT    00222
      ITMK  = 1                                                         INPUT    00223
      IAMK  = 1                                                         INPUT    00224
      KMAX  = 18                                                        INPUT    00225
      KMAZ  = 1                                                         INPUT    00226
      IAMKZ = 1                                                         INPUT    00228
C     -------------------------                                         INPUT    00230
C ... PHOTON ESCAPE VARIABLES                                           INPUT    00231
C     -------------------------                                         INPUT    00232
      JPMAX  = 10                                                       INPUT    00233
      FLESCP = .FALSE.                                                  INPUT    00234
      IPMK   = 1                                                        INPUT    00235
      IBMK   = 1                                                        INPUT    00236
      KPMAX  = 18                                                       INPUT    00237
      KPMAZ  = 1                                                        INPUT    00238
      IBMKZ  = 1                                                        INPUT    00240
C     -------------------------                                         INPUT    00242
C ... ELECTRON FLUX VARIABLES                                           INPUT    00243
C     -------------------------                                         INPUT    00244
      FLFLUX = .FALSE.                                                  INPUT    00245
      JFMAX  = 10                                                       INPUT    00246
      KFMAX  = 6                                                        INPUT    00247
      KFMAZ  = 1                                                        INPUT    00248
      IFAMKZ = 1                                                        INPUT    00250
      IFMK   = 1                                                        INPUT    00252
      IFAMK  = 1                                                        INPUT    00253
C     ----------------------                                            INPUT    00254
C ... PHOTON FLUX VARIABLES                                             INPUT    00255
C     ----------------------                                            INPUT    00256
      FLFLXP = .FALSE.                                                  INPUT    00257
      JFMAXP = 10                                                       INPUT    00258
      KFMAXP = 6                                                        INPUT    00259
      KFMAZP = 1                                                        INPUT    00260
      IFBMKZ = 1                                                        INPUT    00262
      IFMKP  = 1                                                        INPUT    00264
      IFBMK  = 1                                                        INPUT    00265
C     ------------------------------------                              INPUT    00266
C ... PULSE HEIGHT DISTRIBUTION VARIABLES                               INPUT    00267
C     ------------------------------------                              INPUT    00268
      FLPHD  = .FALSE.                                                  INPUT    00269
      JSMAX  = 12                                                       INPUT    00270
      IPHMK  = 1                                                        INPUT    00271
C                                                                       INPUT    00272
C     ***********************************************                   INPUT    00273
C     *           BEGIN READING INPUT               *                   INPUT    00274
C     *  ZERO-LEVEL KEYWORDS IN ALPHABETICAL ORDER  *                   INPUT    00275
C     ***********************************************                   INPUT    00276
C                                                                       INPUT    00280
C ... SET ERROR TRAP FLAG TO ZERO                                       INPUT    00281
      IERTRP = 0                                                        INPUT    00282
      NUMCRD = 0                                                        INPUT    00283
      FLNEWD = .FALSE.                                                  INPUT    00284
      FLDUP  = .FALSE.                                                  INPUT    00285
      DO 65 IKEY=1,MAXKEY                                               INPUT    00286
   65   FLKEY(IKEY) = .FALSE.                                           INPUT    00287
C                                                                       INPUT    00288
C ... READ THE NEXT CARD IN THE INPUT FILE                              INPUT    00289
C                                                                       INPUT    00290
C                                                                       INPUT    00291
   70 CALL OPREAD(1,IECHO,EOFLAG)                                       INPUT    00292
C     ----------------------------                                      INPUT    00293
C                                                                       INPUT    00294
C ... NOTE, COMMENT CARDS DENOTED BY * IN COLUMN 1, SKIPPED INTERNALLY  INPUT    00295
C                                                                       INPUT    00296
      IF (.NOT. EOFLAG) THEN                                            INPUT    00297
        NUMCRD = NUMCRD + 1                                             INPUT    00298
C                                                                       INPUT    00299
   80   IF (KOP('BATCHES') .GE. 1) THEN                                 INPUT    00300
C        ---------                                                      INPUT    00301
C ...     BATCHES                                                       INPUT    00302
```

```
C        ---------                                                      INPUT    00303
C         Check if primary keyword has been used                        INPUT    00304
C                                                                       INPUT    00305
          IKEY = 1                                                      INPUT    00306
C                                                                       INPUT    00307
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                      INPUT    00308
C                          -------------------------                    INPUT    00309
          FLKEY(IKEY) = .TRUE.                                          INPUT    00310
C                                                                       INPUT    00311
          NB = PARM(1)                                                  INPUT    00312
C                                                                       INPUT    00313
        ELSE IF (KOP('CUTOFFS') .GE. 0) THEN                            INPUT    00314
C         ---------                                                     INPUT    00315
C ...     CUTOFFS                                                       INPUT    00316
C         ---------                                                     INPUT    00317
          IKEY = 2                                                      INPUT    00318
C                                                                       INPUT    00319
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                      INPUT    00320
C                          -------------------------                    INPUT    00321
          FLKEY(IKEY) = .TRUE.                                          INPUT    00322
C                                                                       INPUT    00323
          KARG = KOP('CUTOFFS')                                         INPUT    00324
          IF (KARG .GE. 1) THEN                                         INPUT    00325
            TCUT = PARM(1)                                              INPUT    00326
          END IF                                                        INPUT    00327
          IF (KARG .GE. 2) THEN                                         INPUT    00328
            TPCUT = PARM(2)                                             INPUT    00329
          END IF                                                        INPUT    00330
C                                                                       INPUT    00331
        ELSE IF (KOP('DETAIL-IONIZE') .GE. 0) THEN                      INPUT    00332
C         ------------------                                            INPUT    00333
C ...     DETAIL-IONIZATION                                             INPUT    00334
C         ------------------                                            INPUT    00335
          IKEY = 33                                                     INPUT    00336
C                                                                       INPUT    00337
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                      INPUT    00338
C                          -------------------------                    INPUT    00339
          FLKEY(IKEY) = .TRUE.                                          INPUT    00340
C                                                                       INPUT    00341
          NPRTCL = 2                                                    INPUT    00342
C                                                                       INPUT    00343
C
        ELSE IF (KOP('RECTANGLE-SOURCE').GE.0)THEN
C         ------------

C         RECTANGULAR PLANE SOURCE
C         ------------

          IKEY = 34
C


C
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C                          -------------------------
          FLKEY(IKEY) = .TRUE.
C

          KARG = KOP('RECTANGLE-SOURCE')
        IF(KARG.LT.6)THEN
              WRITE(IOUT,68)

68     FORMAT(1X,'>>>>>')
              WRITE(IOUT,51)
                  WRITE(IOUT,68)

51     FORMAT(1X,' USER MUST ENTER 6 NUMBERS (XLOW,XHIGH,YLOW,YHIGH,ZLOW,
      $ZHIGH) TO DEFINE SOURCE LOWER AND UPPER COORDINATE LIMITS OF SOURC
      $E RECTANGLE')
            CALL ABORTX('INPUT')
          ELSE
              IRECTS = 1
```

```
        XLOWS = PARM(1)
        XHIGHS = PARM(2)
        YLOWS = PARM(3)
        YHIGHS = PARM(4)
        ZLOWS = PARM(5)
        ZHIGHS = PARM(6)
        END IF
C
      ELSE IF (KOP('CIRCLE-SOURCE').GE.0)THEN
C       ____________
C         CIRCLE PLANE SOURCE
C        ------------
          IKEY = 35
C
C
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C                          ------------------------
          FLKEY(IKEY) = .TRUE.
C
          KARG = KOP('CIRCLE-SOURCE')
        IF(KARG.LT.6)THEN
              WRITE(IOUT,68)

              WRITE(IOUT,52)

              WRITE(IOUT,68)

52     FORMAT(1X,' USER MUST ENTER 6 NUMBERS - COORDINATES OF CIRCLE CENT
     $ER (XO,YO,ZO),AND COORDINATES A POINT ON CIRCUMFERENCE'/1X,'(XC,YC
     $,ZC) TO DEFINE POSITION AND ORIENTATION OF SOURCE CIRCLE')
C
            CALL ABORTX('INPUT')
        ELSE
            IDISKS = 1
        XCENT = PARM(1)
        YCENT = PARM(2)
        ZCENT = PARM(3)
        XCIR = PARM(4)
        YCIR = PARM(5)
        ZCIR = PARM(6)
        CALL OPREAD(1,IECHO,EOFLAG)
        IF(KOP('RADIUS').GE.1) THEN
        SORCIN = PARM(1)
        ELSE
        GO TO 80
        END IF

C

      END IF
C
C
      ELSE IF (KOP('INDIVIDUAL-HISTS').GE.0) THEN
C      ____________________________________________
C        RECORD SINGLE HISTORY ENERGY DEPOSITIONS
C       ------------------------------------------
C
          IKEY = 36
C
          IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C
          FLKEY(IKEY) = .TRUE.
C
          KARG   = KOP('INDIVIDUAL-HISTS')
           IF(KARG.LT.1.OR. KARG.GT.10)THEN
```

```
            WRITE(IOUT,68)
               WRITE(IOUT,688)
               WRITE(IOUT,68)
688   FORMAT(1X,'USER MUST ENTER NO FEWER THAN 1 AND NO MORE THAN 10 CEL
     $L NUMBERS IN WHICH THE ENERGY DEPOSITION'/1X,'FOR INDIVIDUAL ELECT
     $RON HISTORIES ARE TO BE RECORDED.')
C
         CALL ABORTX('INPUT')
       ELSE
         DO 689 KRRG=1,KARG
689     LHCL(KRRG)=PARM(KRRG)
        NINDV=KARG
       WRITE(IOUT,587)
       WRITE(IOUT,588)(LHCL(KRRG),KRRG=1,NINDV)
588   FORMAT(1X,'ENERGY DEPOSITION FOR INDIVIDUAL HISTORIES WILL BE RECO
     $RDED ON FILE "EDSHOW.TXT" FOR CELL NOS.'/5X,10I5)
       WRITE(IOUT,587)
587   FORMAT(/1X,'*************************************************************
     $*************************************************************'
     $/1X,'*************************************************************
     $*************************************************************')
      END IF
C
      ELSE IF (KOP('DOME-SOURCE').GE.0)THEN
C
C        HEMISPHERICAL DOME SOURCE
C
         IKEY = 37
C
C
         IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)
C                          ------------------------
         FLKEY(IKEY) = .TRUE.
C
         KARG = KOP('DOME-SOURCE')
       IF(KARG.LT.4)THEN
            WRITE(IOUT,68)
            WRITE(IOUT,53)
            WRITE(IOUT,68)
53    FORMAT(1X,' USER MUST ENTER 4 NUMBERS - COORDINATES OF SPHERE CENT
     $ER (XO,YO,ZO),AND SPHERE RADIUS'/1X,'(RDOME)')
C
         CALL ABORTX('INPUT')
       ELSE
         IDOME = 1
       XCENT = PARM(1)
       YCENT = PARM(2)
       ZCENT = PARM(3)
       RDOME = PARM(4)
C
      END IF
C
C
C
      ELSE IF (KOP('DIRECTION') .GE. 0) THEN                    INPUT    00344
C                                                               INPUT    00345
C ...    DIRECTION                                              INPUT    00346
```

New Code

```
C       -----------                                                  INPUT    00347
        IKEY = 3                                                     INPUT    00348
C                                                                    INPUT    00349
        IF (FLKEY(IKEY)) CALL KEYMAP(IKEY,FLDUP)                     INPUT    00350
C                        ------------------------                    INPUT    00351
        FLKEY(IKEY) = .TRUE.                                         INPUT    00352
C                                                                    INPUT    00353
```

•
•
•

Remaining portion of subroutine INPUT (omitted here for brevity) is identical to original ACCEPT [1] code

•
•
•

```
END                                                                  INPUT    01841
```

```
      SUBROUTINE KEYMAP(INDX,FLDUP)                                     KEYMAP   00003
C ***************************************************************************KEYMAP   00004
C                                                                       KEYMAP   00005
C     SUBROUTINE KEYMAP IS CALLED BY                                    KEYMAP   00006
C                                 INPUT                               KEYMAP   00007
C     SUBROUTINE KEYMAP CALLS                                           KEYMAP   00008
C         INTRINSIC FUNCTIONS                                           KEYMAP   00009
C                                                                       KEYMAP   00010
C         EXTERNAL FUNCTIONS                                            KEYMAP   00011
C                                                                       KEYMAP   00012
C                                                                       KEYMAP   00013
C     ORIGINATION DATE      15 AUG 90                                   KEYMAP   00014
C     LAST MODIFIED         11 MARCH 91                                 KEYMAP   00015
C                                                                       KEYMAP   00016
C     FUNCTION                                                          KEYMAP   00017
C        This subroutine contains the INPUT Primary Keyword mapping.    KEYMAP   00018
C        It takes the "indx" of the keyword list array as input and     KEYMAP   00019
C        returns the status of the duplicate keyword flag, "fldup".     KEYMAP   00020
C                                                                       KEYMAP   00021
C     INPUT PARAMETERS                                                  KEYMAP   00022
C        INDX     - Index of the keyword list array                     KEYMAP   00023
C                                                                       KEYMAP   00024
C     OUTPUT PARAMETERS                                                 KEYMAP   00025
C        FLDUP    - Status of the duplicate keyword flag                KEYMAP   00026
C                                                                       KEYMAP   00027
C ***************************************************************************KEYMAP   00028
C *** COMMON BLOCKS CNSTNT, PARAMS                                     KEYMAP   00029
C$    LIST(S=0)                                                         KEYMAP   00030
CDIR$ NOLIST                                                            KEYMAP   00031
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                       PARAMS   00002
C ----------------------------------------------------------------------PARAMS   00003
```

PARAMS common block identical to that shown in subroutine INPUT listed in Appendix 2.

```
C$    LIST(S=1)                                                         KEYMAP   00034
CDIR$ LIST                                                              KEYMAP   00035
C                                                                       KEYMAP   00036
      CHARACTER*17 OKEYLS(MAXKEY)                                       KEYMAP   00037
      LOGICAL FLDUP                                                     KEYMAP   00038
C                                                                       KEYMAP   00039
      DATA OKEYLS /'BATCHES', 'CUTOFFS',                                KEYMAP   00040
     $             'DIRECTION', 'DUMP', 'ECHO',                         KEYMAP   00041
     $             'ELECTRONS', 'ELECTRON-ESCAPE', 'ELECTRON-FLUX',     KEYMAP   00042
     $             'ENERGY', 'GEOMETRY', 'HISTORIES', 'NEW-DATA-SET',   KEYMAP   00043
     $             'NEXT-EVENT-ESCAPE', 'NO-KNOCKONS', 'NO-STRAGGLING', KEYMAP   00044
     $             'PHOTONS', 'PHOTON-ESCAPE', 'PHOTON-FLUX', 'PLOTS',  KEYMAP   00045
     $             'POSITION', 'PRINT-ALL', 'PULSE-HEIGHT',             KEYMAP   00046
     $             'RANDOM-NUMBER', 'RESTART', 'SCALE-BREMS',           KEYMAP   00047
     $             'SCALE-IMPACT', 'SIMPLE-BREMS', 'SPECTRUM', 'TITLE', KEYMAP   00048
     $             'TRAP-ELECTRONS', 'NO-COHERENT', 'NO-INCOH-BINDING', KEYMAP   00049
C    $             'DETAIL-IONIZE'/                                     KEYMAP   00050
     $             'DETAIL-IONIZE','RECTANGLE-SOURCE','CIRCLE-SOURCE',
     $             'INDIVIDUAL-HISTS','DOME-SOURCE'/
     C                                                                  KEYMAP   00051
C     Print that the keyword pointed to by INDX is a duplicate entry    KEYMAP   00052
C                                                                       KEYMAP   00053
      WRITE(IOUT,'('' >>>> KEYMAP: DUPLICATE INPUT KEYWORD: '', (A))') KEYMAP   00054
     $      OKEYLS(INDX)                                               KEYMAP   00055
      IF (.NOT. FLDUP) FLDUP = .TRUE.                                   KEYMAP   00056
C                                                                       KEYMAP   00057
      RETURN                                                            KEYMAP   00058
      END                                                               KEYMAP   00059
```

New code

```
      SUBROUTINE SRCINF(IMXOLD)                                          SRCINF   00002
C ***************************************************************************SRCINF   00003
C                                                                        SRCINF   00004
C     PROGRAM SRCINF IS CALLED BY                                        SRCINF   00005
C                                INPUT                                   SRCINF   00006
C     PROGRAM INPUT CALLS                                                SRCINF   00007
C         INTRINSIC FUNCTIONS                                            SRCINF   00008
C                              MAX,   SIN,   COS,   SQRT                 SRCINF   00009
C         EXTERNAL FUNCTIONS                                             SRCINF   00010
C                              ABORTX                                    SRCINF   00011
C                                                                        SRCINF   00012
C     ORIGINATION DATE      28 NOV 89                                    SRCINF   00013
C     LAST MODIFIED         11 MARCH 91                                  SRCINF   00014
C                                                                        SRCINF   00015
C     FUNCTION                                                           SRCINF   00016
C        This Subroutine processes the SOURCE Information                SRCINF   00017
C                                                                        SRCINF   00018
C     INPUT PARAMETERS                                                   SRCINF   00019
C        IMXOLD  -                                                       SRCINF   00020
C                                                                        SRCINF   00021
C     OUTPUT PARAMETERS                                                  SRCINF   00022
C        NONE                                                            SRCINF   00023
C                                                                        SRCINF   00024
C ***************************************************************************SRCINF   00025
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, STTS                      SRCINF   00026
C$    LIST(S=0)                                                          SRCINF   00027
CDIR$ NOLIST                                                             SRCINF   00028
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)                                CNSTNT   00081
      SAVE                                                               CNSTNT   00082
C
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        PARAMS   00002
C ------------------------------------------------------------------------ PARAMS   00003
```

PARAMS common block identical to that shown in subroutine INPUT listed in Appendix 2.

New code

```
      COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
     $  IDOME,RDOME
      LOGICAL RRKILL, FLMTEL                                             OUT      00002
      COMMON /OUT/                                                       OUT      00003
     1 FLMTEL(INGP)                                                      OUT      00004
```

No changes in OUT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00002
      COMMON /CALC/                                                      CALC     00003
     1 ACON(INMT),          ASTEP(INMAX,INMT),      AT(NSURV,INMT),     CALC     00004
```

No changes in CALC common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00139
      LOGICAL DMPFLG, FLMC                                               STTS     00002
      DOUBLE PRECISION IRSAV                                             STTS     00010
      COMMON  /STTS/  IB,  NB,  NSORS, IBT, BOLD, BATCH, KPUTMX, DMPFLG STTS     00017
     $ ,  IHIST,   IRSAV,  KPUT, FLMC                                    STTS     00018
C                                                                        STTS     00019
C$    LIST(S=1)                                                          SRCINF   00034
CDIR$ LIST                                                               SRCINF   00035
C                                                                        SRCINF   00036
      WRITE(IOUT,'(''1************************''/                        SRCINF   00037
     $             '' *  SOURCE INFORMATION  *''/                       SRCINF   00038
     $             '' ************************'')')                     SRCINF   00039
C                                                                        SRCINF   00040
      IF (FLESRC) THEN                                                   SRCINF   00041
        WRITE(IOUT,'(''0SOURCE ELECTRONS'')')                            SRCINF   00042
      ELSE                                                               SRCINF   00043
        WRITE(IOUT,'(''0SOURCE PHOTONS'')')                              SRCINF   00044
```

```
      END IF                                                            SRCINF   00045
C                                                                       SRCINF   00046
      WRITE(IOUT,'(''0THE MAXIMUM SOURCE ENERGY IS'',T38,F12.5,         SRCINF   00047
     $            '' MEV'')') TIN                                       SRCINF   00048
      WRITE(IOUT,'(''0THE GLOBAL ELECTRON CUTOFF ENERGY IS'',T38,F12.5, SRCINF   00049
     $            '' MEV'')') TCUT                                      SRCINF   00050
      WRITE(IOUT,'(''0THE PHOTON CUTOFF ENERGY IS'',T38,F12.5,          SRCINF   00051
     $            '' MEV'')') TPCUT                                     SRCINF   00052
      IF (TSAVE .GT. TCUT) WRITE(IOUT,'(''0THE GLOBAL ELECTRON TRAP'',  SRCINF   00053
     $            ''PING ENERGY IS'',T38,F12.5,'' MEV'')') TSAVE        SRCINF   00054
C                                                                       SRCINF   00055
      IF (FLSPEC) THEN                                                  SRCINF   00056
        WRITE(IOUT,'(''0SOURCE SPECTRUM'')')                            SRCINF   00057
        WRITE(IOUT,'(12I6)') JSPEC                                      SRCINF   00058
        WRITE(IOUT,'(''0NORMALIZED CUMULATIVE SPECTRUM'')')             SRCINF   00059
        WRITE(IOUT,'(6F12.5)') (SPECIN(J),J=1,JSPEC)                    SRCINF   00060
        IF ((SPECIN(1) .NE. CONE) .OR. (SPECIN(JSPEC) .NE. CZERO)) THEN SRCINF   00061
          WRITE(IOUT,*) ' INPUT CUMULATIVE SOURCE SPECTRUM MUST BE',    SRCINF   00062
     $                  ' MONOTONICALLY DECREASING FROM 1.0 TO 0.0'     SRCINF   00063
C                                                                       SRCINF   00064
          CALL ABORTX('SRCINF')                                         SRCINF   00065
C         ----------------------                                        SRCINF   00066
        END IF                                                          SRCINF   00067
        WRITE(IOUT,'(''0SPECTRAL ENERGIES (MEV)'')')                    SRCINF   00068
        WRITE(IOUT,'(6F12.5)') (ESP(J),J=1,JSPEC)                       SRCINF   00069
C                                                                       SRCINF   00070
      END IF                                                            SRCINF   00071
C
      IF(IRECTS.EQ.0 .AND. IDISKS.EQ.0  .AND. IDOME.EQ.0) THEN
C                                                                       SRCINF   00072
      WRITE(IOUT,'(''0COORDINATES OF THE POINT SOURCE OR OF THE'',      SRCINF   00083
     $            '' CENTER OF THE BEAM (DISK) SOURCE ARE''/            SRCINF   00084
     $            ''     X = '',E12.5,'' CM'',10X,''Y = '',E12.5,       SRCINF   00085
     $            '' CM'',10X,''Z = '',E12.5,'' CM'')')                 SRCINF   00086
     $               XSR, YSR, ZSR                                      SRCINF   00087
      WRITE(IOUT,'(''0THE RADIUS OF THE BEAM (DISK) SOURCE IS = '',     SRCINF   00088
     $             1PE12.4,'' CM'')') SORCIN                            SRCINF   00089
C                                                                       SRCINF   00095
      END IF
C
      IF(IDOME.EQ.0)THEN
      WRITE(IOUT,'(''0REFERENCE DIRECTION FOR ANGULAR DISTRIBUTION'',   SRCINF   00090
     $            '' IS DEFINED BY''/''     THETA = '',G11.4,           SRCINF   00091
     $            '' DEGREES'',10X,''PHI = '',G11.4,'' DEGREES'')')     SRCINF   00092
     $               CTSR, CPSR                                         SRCINF   00093

      TEMPA = CTSR/C180PI                                               SRCINF   00096
      CTSR  = COS(TEMPA)                                                SRCINF   00097
      STSR  = SIN(TEMPA)                                                SRCINF   00099
      TEMPA = CPSR/C180PI                                               SRCINF   00100
      CPSR  = COS(TEMPA)                                                SRCINF   00101
      SPSR  = SIN(TEMPA)                                                SRCINF   00102
       END IF
C
      IF(IRECTS.EQ.1)THEN
         WRITE(IOUT,55)XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,ZHIGHS
55    FORMAT(//1X,'RECTANGULAR PLATE SOURCE,'/5X,'BOUNDING COORDINATES A
     $RE - '/10X,'XLOW = ',E12.5,'   XHIGH = ',E12.5/10X,'YLOW = ',E12.5
     $,'   YHIGH = ',E12.5/10X,'ZLOW = ',E12.5,'   ZHIGH = ',E12.5)
         IF(ABS(XHIGHS-XLOWS).LE.CT1EM7)KPERPYZ=1
         IF(ABS(YHIGHS-YLOWS).LE.CT1EM7)KPERPXZ=1
         IF(ABS(ZHIGHS-ZLOWS).LE.CT1EM7)KPERPXY=1
              KPRPSUM=KPERPYZ+KPERPXZ+KPERPXY
              IF(KPRPSUM.EQ.0 .OR. KPRPSUM.EQ.3)THEN
              WRITE(IOUT,54)
54    FORMAT(///1X,'PROBLEM IN DEFINITION OF SOURCE PLANE ORIENTATION')
           CALL ABORTX('SRCINF')
              END IF
         END IF
C
      IF(IDISKS.EQ.1)THEN
```

New code

New code

New code

```
          WRITE(IOUT,56)XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR
56     FORMAT(//1X,'CIRCULAR DISK SOURCE'/5X,'COORDINATES OF CENTER ARE'/
     $10X,'XCENTER = ',E12.5,'   YCENTER = ',E12.5,'   ZCENTER = ',E12.5
     $//5X,'COORDINATES OF POINT ON CIRCUMFERENCE ARE'/10X,'XCIR = ',
     $E12.5,'   YCIR = ',E12.5,'   ZCIR = ',E12.5)
          IF(ABS(XCENT-XCIR).LE.CT1EM7)KPERPYZ=1
          IF(ABS(YCENT-YCIR).LE.CT1EM7)KPERPXZ=1
          IF(ABS(ZCENT-ZCIR).LE.CT1EM7)KPERPXY=1
               KPRPSUM=KPERPYZ+KPERPXZ+KPERPXY
               IF(KPRPSUM.EQ.0 .OR. KPRPSUM.EQ.3)THEN
               WRITE(IOUT,54)
           CALL ABORTX('SRCINF')
               END IF

C

                    IF(SORCIN.EQ.CZERO)THEN

                    WRITE(IOUT,57)

                    CALL ABORTX('SRCINF')

                    END IF

C

              RSSQQ=SQRT((XCENT-XCIR)**2+(YCENT-YCIR)**2+(ZCENT-ZCIR)**2)
                    IF(ABS(RSSQQ-SORCIN).GT.CT1EM7)THEN

                    WRITE(IOUT,58)

                    CALL ABORTX('SRCINF')

                    ELSE

                    SORCIN=RSSQQ
                    WRITE(IOUT,59)SORCIN
59     FORMAT(/1X,'RADIUS OF THE DISK SOURCE IS ',E12.5)

                    END IF

57     FORMAT(///1X,'SOURCE DISK RADIUS NOT SPECIFIED')
58     FORMAT(///1X,'SOURCE DISK RADIUS INCONSISTENT WITH SPECIFICATION O
     $F POINTS ON CIRCUMFERENCE AND AT CENTER OF SOURCE DISK')


      END IF
C
      IF(IDOME.EQ.1)THEN
        WRITE(IOUT,61)XCENT,YCENT,ZCENT,RDOME
61    FORMAT(//1X,'HEMISPHERICAL DOME SOURCE'/5X,'COORDINATES OF SPHERE
     $CENTER ARE'/
     $10X,'XCENTER = ',E12.5,'   YCENTER = ',E12.5,'   ZCENTER = ',E12.5
     $//5X,'DOME RADIUS = ',E12.5)
      END IF
C
C                                                                SRCINF   00103
C     This code block checks to see if the sine of the input polar SRCINF   00104
C     angle direction is less than zero. If it is, it allows this SRCINF   00105
C     condition within an acceptable tolerance and changes the sine SRCINF   00106
C     of the angle to zero; else it aborts.                      SRCINF   00107
C                                                                SRCINF   00108
      IF (STSR .LT. CZERO) THEN                                  SRCINF   00109
        IF (STSR .GT. -C1EM6) THEN                               SRCINF   00110
          WRITE (IOUT,'(//,'' >>>> SRCINF: WARNING! SINE OF SOURCE'',  SRCINF   00111
     $           '' INPUT POLAR ANGLE DIRECTION IS CHANGED TO ZERO.'')')SRCINF   00112
          STSR = CZERO                                           SRCINF   00113
          CTSR = SIGN(CONE,CTSR)                                 SRCINF   00114
        ELSE                                                     SRCINF   00115
          WRITE (IOUT,'(//,'' >>>> THE INPUT POLAR ANGLE WITH THE'',   SRCINF   00116
```

New code

```
     $           '' DIRECTION KEYWORD MUST BE BETWEEN ZERO AND 180'',   SRCINF   00117
     $           '' DEGREES.'')')                                       SRCINF   00118
C                                                                       SRCINF   00119
          CALL ABORTX('SRCINF')                                         SRCINF   00120
C         ---------------------                                         SRCINF   00121
        END IF                                                          SRCINF   00122
      END IF                                                            SRCINF   00123
C                                                                       SRCINF   00124
C
      IF(IRECTS.EQ.0 .AND. IDISKS.EQ.0  .AND.  IDOME.EQ.0) THEN
      WSRX = STSR*CPSR                                                  SRCINF   00125
      WSRY = STSR*SPSR                                                  SRCINF   00126
      WSRZ = CTSR                                                       SRCINF   00127
C     ---------------------------------                                 SRCINF   00128
C ... USUALLY W1(V) = R(V) X OMEGA(V)                                   SRCINF   00129
C     ---------------------------------                                 SRCINF   00130
      W1X  = YSR*WSRZ - ZSR*WSRY                                        SRCINF   00131
      W1Y  = ZSR*WSRX - XSR*WSRZ                                        SRCINF   00132
      W1Z  = XSR*WSRY - YSR*WSRX                                        SRCINF   00133
      XNRM = W1X*W1X + W1Y*W1Y + W1Z*W1Z                                SRCINF   00134
C     ----------------------------                                      SRCINF   00135
C ... UNLESS R(V) X OMEGA(V) = 0                                        SRCINF   00136
C     ----------------------------                                      SRCINF   00137
      IF (XNRM .EQ. CZERO) THEN                                         SRCINF   00138
C      ------------------------------------                             SRCINF   00139
C ...   IF I(V) * OMEGA(V) = 0, W1(V) = I(V)                            SRCINF   00140
C      ------------------------------------                             SRCINF   00141
        IF (WSRX .EQ. CZERO) THEN                                       SRCINF   00142
          W1X = CONE                                                    SRCINF   00143
          W1Y = CZERO                                                   SRCINF   00144
          W1Z = CZERO                                                   SRCINF   00145
C        ------------------------------------                           SRCINF   00146
C ...     IF J(V) * OMEGA(V) = 0, W1(V) = J(V)                          SRCINF   00147
C        ------------------------------------                           SRCINF   00148
      .   ELSE IF (WSRY .EQ. CZERO) THEN                                SRCINF   00149
          W1X = CZERO                                                   SRCINF   00150
          W1Y = CONE                                                    SRCINF   00151
          W1Z = CZERO                                                   SRCINF   00152
C        ------------------------------------                           SRCINF   00153
C ...     IF K(V) * OMEGA(V) = 0, W1(V) = K(V)                          SRCINF   00154
C        ------------------------------------                           SRCINF   00155
        ELSE IF (WSRZ .EQ. CZERO) THEN                                  SRCINF   00156
          W1X = CZERO                                                   SRCINF   00157
          W1Y = CZERO                                                   SRCINF   00158
          W1Z = CONE                                                    SRCINF   00159
C        ----------------------------------------                       SRCINF   00160
C ...     OTHERWISE, W1(V) = +OR- K(V) X OMEGA(V)                       SRCINF   00161
C        ----------------------------------------                       SRCINF   00162
        ELSE                                                            SRCINF   00163
          W1Z = CZERO                                                   SRCINF   00164
          W1X = CONE/SQRT(CONE + (WSRX/WSRY)**2)                        SRCINF   00165
          W1Y = -W1X*WSRX/WSRY                                          SRCINF   00166
        END IF                                                          SRCINF   00167
      ELSE                                                              SRCINF   00168
        XNRM = SQRT(XNRM)                                               SRCINF   00169
        W1X  = W1X/XNRM                                                 SRCINF   00170
        W1Y  = W1Y/XNRM                                                 SRCINF   00171
        W1Z  = W1Z/XNRM                                                 SRCINF   00172
      END IF                                                            SRCINF   00173
C                                                                       SRCINF   00174
      W2X = WSRY*W1Z - WSRZ*W1Y                                         SRCINF   00175
      W2Y = WSRZ*W1X - WSRX*W1Z                                         SRCINF   00176
      W2Z = WSRX*W1Y - WSRY*W1X                                         SRCINF   00177
      XSR = XSR + CT1EM7*WSRX                                           SRCINF   00178
      YSR = YSR + CT1EM7*WSRY                                           SRCINF   00179
      ZSR = ZSR + CT1EM7*WSRZ                                           SRCINF   00180
      IF (SORCIN .EQ. CZERO) THEN                                       SRCINF   00181
        XSR = XSR+CT1EM7*W1X                                            SRCINF   00182
        YSR = YSR+CT1EM7*W1Y                                            SRCINF   00183
        ZSR = ZSR+CT1EM7*W1Z                                            SRCINF   00184
      END IF                                                            SRCINF   00185
C
      END IF
C
      IF(IDOME.EQ.0)THEN                                                SRCINF   00187
      IF (ICTH .EQ. 1) THEN                                             SRCINF   00188
        WRITE(IOUT,'(''0MONODIRECTIONAL SOURCE IN REFERENCE'',          SRCINF   00189
     $           '' DIRECTION'')')                                      SRCINF   00190
      ELSE IF (ICTH .EQ. 2) THEN                                        SRCINF   00191
        WRITE(IOUT,'(''0ISOTROPIC SOURCE TRUNCATED AT '',G11.4,         SRCINF   00192
     $       '' DEGREES WITH RESPECT TO REFERENCE DIRECTION'')') CTHIN   SRCINF   00193
        CTHIN = COS(CTHIN/C180PI)                                       SRCINF   00194
```

New code

New code

```
      ELSE                                                                  SRCINF   00195
        WRITE(IOUT,'(''0COSINE-LAW SOURCE TRUNCATED AT '',G11.4,            SRCINF   00196
     $        '' DEGREES WITH RESPECT TO REFERENCE DIRECTION'')') CTHIN     SRCINF   00197
        CTHIN = COS(CTHIN/C180PI)**2                                        SRCINF   00198
      END IF                                                                SRCINF   00199
       END IF
C                                                                           SRCINF   00200
      IF (NB .LE. 0)       NB = 10                                          SRCINF   00201
      IF (IMAX .LT. NB) IMAX = NB                                           SRCINF   00202
      IMAX = IMAX/NB                                                        SRCINF   00203
C                                                                           SRCINF   00204
      IF ((IBT .NE. 0) .AND. (IMAX .NE. IMXOLD)) THEN                       SRCINF   00205
C                                                                           SRCINF   00206
C   ... BATCH SIZES INCONSISTENT ON RESTART - TERMINATE RUN                 SRCINF   00207
C                                                                           SRCINF   00208
        WRITE(IOUT,'(''0*** FATAL ERROR ON ATTEMPTED RESTART ***''/         SRCINF   00209
     $   '' NEW BATCH SIZE = '',I10,'' DOESNT EQUAL OLD BATCH SIZE = '',    SRCINF   00210
     $   I10/'' BATCH SIZES MUST MATCH TO CORRECTLY ACCUMULATE'',           SRCINF   00211
     $   '' STATISTICS'' )') IMAX, IMXOLD                                   SRCINF   00212
C                                                                           SRCINF   00213
        CALL ABORTX('SRCINF')                                               SRCINF   00214
C       ---------------------                                               SRCINF   00215
      END IF                                                                SRCINF   00216
C                                                                           SRCINF   00217
      NB = NB + IBT                                                         SRCINF   00218
      WRITE(IOUT,'(''0THE STANDARD ERROR ESTIMATES ARE BASED ON '',I5,      SRCINF   00219
     $             '' BATCHES OF '',I7,'' HISTORIES EACH'')') NB,IMAX       SRCINF   00220
C                                                                           SRCINF   00221
      RETURN                                                                SRCINF   00222
C                                                                           SRCINF   00223
      END                                                                   SRCINF   00224
C                                                                           SRCINF   00225
```

New code

```
      SUBROUTINE HIST                                                    HIST     00007
C ***********************************************************************HIST     00009
C                                                                        HIST     00010
C     SUBROUTINE HIST IS CALLED BY                                       HIST     00011
C                                  ITS                                   HIST     00012
C     SUBROUTINE HIST CALLS                                              HIST     00013
C         INTRINSIC FUNCTIONS                                            HIST     00014
C                              SQRT, RANF                                HIST     00015
C                              REAL                 (CYLTRAN)            HIST     00016
C         EXTERNAL FUNCTIONS                                             HIST     00017
C                              CLASS, ECROS, EHIST, TIMER, PHIST         HIST     00018
C                              RANINT, RANSAV                            HIST     00019
C                              ZONE                           (CYLTRAN)  HIST     00020
C                              FOLD,  ZONEA                   (ACCEPT)   HIST     00021
C                              PLTDAT                         (M-CODES)  HIST     00022
C                                                                        HIST     00023
C     ORIGINATION DATE     16 JAN 68.                                    HIST     00024
C     LAST MODIFIED        30 MAY 91                                     HIST     00025
C                                                                        HIST     00026
C     FUNCTION                                                           HIST     00027
C        THIS PROGRAM SAMPLES PHASE SPACE PARAMETERS FOR                 HIST     00028
C        SOURCE PARTICLES.  SUBSEQUENTLY CALLS EITHER EHIST OR           HIST     00029
C        PHIST.  RETRIEVES "BANKED" ELECTRONS AND CALLS EHIST.           HIST     00030
C        TALLIES PULSE HEIGHT DISTRIBUTION.                              HIST     00031
C                                                                        HIST     00032
C ***********************************************************************HIST     00033
C *** COMMON BLOCKS CNSTNT, PARAMS, OUT, CALC, XPED, STOR, STTS,         HIST     00034
C                 (PAREM)-ACCEPT                                         HIST     00035
C$    LIST(S=0)                                                          HIST     00036
CDIR$ NOLIST                                                             HIST     00037
```

No changes in CNSTNT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        PARAMS   00002
C ---------------------------------------------------------------------- PARAMS   00003
```

PARAMS common block identical to that shown in subroutine INPUT listed in Appendix 2.

```
      COMMON /EXTSORC/ IRECTS,IDISKS,XLOWS,XHIGHS,YLOWS,YHIGHS,ZLOWS,
     $  ZHIGHS,XCENT,YCENT,ZCENT,XCIR,YCIR,ZCIR,KPERPYZ,KPREPXZ,KPERPXY
     $  IDOME,RDOME
      LOGICAL RRKILL, FLMTEL                                             OUT      00002
      COMMON /OUT/                                                       OUT      00003
     1 FLMTEL(INGP)                                                      OUT      00004
```

New code

No changes in OUT common block - listing, omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00002
      COMMON /CALC/                                                      CALC     00003
     1 ACON(INMT),         ASTEP(INMAX,INMT),     AT(NSURV,INMT),       CALC     00004
```

No changes in CALC common block - listing, , omitted for brevity, is identical to that given in Reference 1.

```
C                                                                        CALC     00139
C                                                                        XPED     00002
      COMMON /XPED/                                                      XPED     00003
     1 DETOUR(INMT), RHO(INMT), MT, MTP, MTP0                            XPED     00010
C                                                                        XPED     00012
      LOGICAL DMPFLG, FLMC                                               STTS     00002
      DOUBLE PRECISION IRSAV                                             STTS     00010
      COMMON  /STTS/  IB,  NB,  NSORS, IBT, BOLD, BATCH, KPUTMX, DMPFLG  STTS     00017
     $ ,  IHIST,   IRSAV,  KPUT, FLMC                                    STTS     00018
C                                                                        STTS     00019
C                                                                        PAREM    00002
      CHARACTER*3 OTYPE(10), OBODY                                       PAREM    00003
      LOGICAL FLDBG, FLDBGL                                              PAREM    00004
      COMMON /PAREM/                                                     PAREM    00008
     $  XB(3),   WT(3),   RIN,   ROUT,   PINF,   DIST,   IR,            PAREM    00009
     $  FLDBG,   IRPRIM,  ICALL, LSURF,  NBO,    LRI,    LRO,           PAREM    00013
     $  KLOOP,   LOOP,    ITYPE, FLDBGL                                 PAREM    00014
```

```
      COMMON /PAREMO/  OTYPE                                                PAREM    00015
C                                                                           PAREM    00016
         COMMON /HITS/EDPR(10),EDNK(10),EDSC(10),EDTL(10),LHCL(10),NINDV
C$    LIST(S=1)                                                             HIST     00047
CDIR$ LIST                                                                  HIST     00048
      COMMON /STOR/                                                         STOR     00002
     1 CTHS(NLAST),  TS(NLAST),  WS(NLAST),  ZS(NLAST),  IPRS(NLAST),       STOR     00003
     2 LBS(NLAST),   NTS(NLAST)                                             STOR     00004
     $ ,XS(NLAST),   YS(NLAST),  STHS(NLAST),                               STOR     00006
     3 CPHS(NLAST),  SPHS(NLAST)                                            STOR     00007
     4 ,LBCS(NLAST)                                                         STOR     00009
C                                                                           HIST     00050
      EXTERNAL RAN                                                          RANNUM   00003
C                                                                           HIST     00089
      CIMAX = IMAX                                                          HIST     00090
      IF (FLSPEC) THEN                                                      HIST     00091
        TAV = CZERO                                                         HIST     00092
      ELSE                                                                  HIST     00093
        TAV = CIMAX*TIN                                                     HIST     00094
      END IF                                                                HIST     00095
C     _____________________                                                 HIST     00096
      CALL RANINT(IRA)                                                      HIST     00097
C     --------------------                                                  HIST     00098
      IF (IB .EQ. 1) INRAN = IRA                                            HIST     00101
      DO 130 I = 1, IMAX                                                    HIST     00103
            DO 1301 JJJ=1,10
               EDPR(JJJ)=0.
               EDNK(JJJ)=0.
               EDSC(JJJ)=0.
1301     EDTL(JJJ)=0.
         IHIST = I                                                          HIST     00104
      MODTMJ = MIN(100,IMAX)                                                LAHEY    00017
      IF(I.EQ.MODTMJ*(I/MODTMJ)) THEN                                       LAHEY    00018
      CALL TOTTIM(XTMJ)                                                     LAHEY    00019
      WRITE(*,'(/'' HISTORY'',I8,'', ELAPSED MINUTES'',F10.2)')             LAHEY    00020
     1I,XTMJ/60.                                                            LAHEY    00021
      ENDIF                                                                 LAHEY    00022
        W      = CONE                                                       HIST     00105
        CWCF   = W                                                          HIST     00106
        LAST   = 0                                                          HIST     00107
C       _____________________                                               HIST     00108
        CALL RANSAV(IRSAV)                                                  HIST     00109
C       ---------------------                                               HIST     00110
C                                                                           HIST     00111
C _________________                                                         HIST     00112
C ... SOURCE ENERGY                                                         HIST     00113
C -----------------                                                         HIST     00114
        IF (FLSPEC) THEN                                                    HIST     00115
          RA = RAN(IRAN)                                                    HIST     00116
          DO 14 JHIST = 2,JSPEC                                             HIST     00117
             IF ( RA. GT. SPECIN(JHIST) ) GO TO 16                          HIST     00118
   14     CONTINUE                                                          HIST     00119
   16     T = ESP(JHIST-1) + ( RA -SPECIN(JHIST-1) )*( ESP(JHIST)           HIST     00120
     $       - ESP(JHIST-1) )/( SPECIN(JHIST) - SPECIN(JHIST-1) )           HIST     00121
          TAV = TAV + T                                                     HIST     00122
          IF ( (FLESRC .AND. (T .GT. TCUT )) .OR.                           HIST     00123
     $         (.NOT. FLESRC .AND. (T .GT. TPCUT)) ) THEN                   HIST     00124
               GO TO 20                                                     HIST     00125
          ELSE                                                              HIST     00126
               NTREJ = NTREJ + 1                                            HIST     00127
               TREJ  = TREJ + W*T                                           HIST     00128
               GO TO 1299                                                   HIST     00129
          END IF                                                            HIST     00130
        END IF                                                              HIST     00131
        T  = TIN                                                            HIST     00132
   20   NT = NTFST                                                          HIST     00133
C       _____________________                                               HIST     00134
        CALL CLASS (T,NT)                                                   HIST     00135
C       --------------------                                                HIST     00136
      IF(IDOME.EQ.0)THEN                                                    HIST     00137
C _____________________
```

New code

```
C ... SOURCE DIRECTION                                                  HIST    00138
C --------------------                                                 HIST    00139
        IF (ICTH .EQ. 2) THEN                                           HIST    00140
          RA  = RAN(IRAN)                                               HIST    00141
          COM = CTHIN+ RA*(CONE-CTHIN)                                  HIST    00142
        ELSE IF (ICTH .EQ. 3) THEN                                      HIST    00143
          RA  = RAN(IRAN)                                               HIST    00144
          COM = SQRT(CTHIN+RA*(CONE-CTHIN))                             HIST    00145
        ELSE IF (ICTH .EQ. 1) THEN                                      HIST    00146
          CTH(1) = CTSR                                                 HIST    00147
          STH(1) = STSR                                                 HIST    00149
          CPH(1) = CPSR                                                 HIST    00150
          SPH(1) = SPSR                                                 HIST    00151
          GO TO 69                                                      HIST    00153
        END IF                                                          HIST    00154
C                                                                       HIST    00155
        IF (CTSR .EQ. CONE) THEN                                        HIST    00156
          CTH(1) = COM                                                  HIST    00157
          STH(1) = SQRT(CONE-COM*COM)                                   HIST    00159
          RA     = RAN(IRAN)                                            HIST    00160
          JAZ    = RA*C360                                              HIST    00161
          CPH(1) = CCH(JAZ+1)                                           HIST    00162
          SPH(1) = SCH(JAZ+1)                                           HIST    00163
        ELSE                                                            HIST    00165
C       ------------------------------------------------------------    HIST    00172
          CALL FOLD(CTSR,STSR,CPSR,SPSR,COM,CTH(1),STH(1),CPH(1),SPH(1))HIST    00173
C       ------------------------------------------------------------    HIST    00174
        END IF                                                          HIST    00176
       END IF
C ------------------------------                                        HIST    00177
C ... SOURCE POSITION                                                   HIST    00178
C --------------------                                                 HIST    00179
 69     IF (SORCIN .NE. CZERO) THEN                                     HIST    00198
          RA   = RAN(IRAN)                                              HIST    00199
          R    = SQRT(RA)*SORCIN                                        HIST    00200
          RA   = RAN(IRAN)                                              HIST    00201
          JAZ  = RA*C360                                                HIST    00202
          SCHR = SCH(JAZ+1)*R                                           HIST    00203
          CCHR = CCH(JAZ+1)*R                                           HIST    00204
            IF (IDISKS .EQ. 0) THEN
                  X   = XSR + CCHR*W1X+SCHR*W2X
                  Y   = YSR+CCHR*W1Y+SCHR*W2Y
                  Z   = ZSR+CCHR*W1Z+SCHR*W2Z
              ELSE
                 IF(KPERPXY.EQ.1)THEN
                    X = XCENT + CCHR
                        Y = YCENT + SCHR
                        Z = ZCENT
                     END IF
                     IF (KPERPXZ.EQ.1)THEN
                       X = XCENT + CCHR
                       Y = YCENT
                       Z = ZCENT + SCHR
                     END IF
                     IF(KPERPYZ.EQ.1)THEN

                X = XCENT
                       Y = YCENT + CCHR

                Z = ZCENT + SCHR

              END IF

            END IF

        ELSE

            IF (IRECTS .EQ. 0 .AND. IDOME.EQ.0)THEN                     HIST    00208
          X = XSR                                                       HIST    00209
          Y = YSR                                                       HIST    00210
          Z = ZSR                                                       HIST    00211
```

New code

New code

```
      ELSE
           IF(IRECTS.NE.0)THEN

          RRAA1 = RAN(IRAN)
          RRAA2 = RAN(IRAN)

          IF (KPERPXY .EQ. 1) THEN
            X = XLOWS + RRAA1*(XHIGHS-XLOWS)
            Y = YLOWS + RRAA2*(YHIGHS-YLOWS)
            Z = ZLOWS

          END IF

          IF (KPERPXZ. EQ. 1) THEN
            X = XLOWS + RRAA1*(XHIGHS-XLOWS)
            Y = YLOWS

            Z = ZLOWS + RRAA2*(ZHIGHS-ZLOWS)
          END IF

          IF (KPERPYZ .EQ.1) THEN

            X = XLOWS

            Y = YLOWS + RRAA1*(YHIGHS-YLOWS)
            Z = ZLOWS + RRAA2*(ZHIGHS-ZLOWS)
          END IF
           END IF
           IF(IDOME.NE.0)THEN
           STHDM=RAN(IRAN)

        CTHDM=SQRT(1.-STHDM*STHDM)
        PPHDM=C2PI*RAN(IRAN)
        CPPHDM=COS(PPHDM)
      SPPHDM=SIN(PPHDM)
        ALDM=STHDM*CPPHDM
        BTDM=STHDM*SPPHDM
        X=RDOME*ALDM
        Y=RDOME*BTDM
        Z=RDOME*CTHDM
106       PHSDM=C2PI*RAN(IRAN)
        CTHSDM=2.*RAN(IRAN)-1.
        STHSDM=SQRT(1.-CTHSDM*CTHSDM)
        SPHSDM=SIN(PHSDM)
        CPHSDM=COS(PHSDM)
        UUUD=STHSDM*CPHSDM
        VVVD=STHSDM*SPHSDM
        WWWD=CTHSDM
        AAAD=SQRT(UUUD**2+VVVD**2+WWWD**2)
        UUUD=UUUD/AAAD
        VVVD=VVVD/AAAD
        WWWD=WWWD/AAAD
        PRODD=ALDM*UUUD+BTDM*VVVD+CTHDM*WWWD
        IF(PRODD.GT.0.0)GO TO 106
        STH(1)=STHSDM
        CTH(1)=CTHSDM
        SPH(1)=SPHSDM
        CPH(1)=CPHSDM
        END IF
      END IF

      END IF                                                    HIST    00212
C                                                               HIST    00213
      XB(1) = X                                                 HIST    00220
      XB(2) = Y                                                 HIST    00221
      XB(3) = Z                                                 HIST    00222
      WT(1) = STH(1)*CPH(1)                                     HIST    00223
      WT(2) = STH(1)*SPH(1)                                     HIST    00224
      WT(3) = CTH(1)                                            HIST    00225
C                                                               HIST    00226
      CALL ZONEA                                                HIST    00227
C     ----------                                                HIST    00228
      LB    = IR                                                HIST    00229
```

New code

```
      LBCZ = IRPRIM                                                    HIST    00230
      IPR = 1                                                          HIST    00232
C                                                                      HIST    00233
C                                                                      HIST    00234
C ... CALL TRACKING ROUTINES                                           HIST    00235
C -------------------------                                            HIST    00236
   70 IF ( FLESRC .OR. (IPR .NE. 1) ) THEN                             HIST    00237
C                                                                      HIST    00238
C ...   PARTICLE TO BE TRACKED IS AN ELECTRON                          HIST    00239
C       ------------------------------------                           HIST    00240
        IF (MT .NE. MAT(LB)) THEN                                      HIST    00241
          MT = MAT(LB)                                                 HIST    00242
        END IF                                                         HIST    00248
C                                                                      HIST    00249
          CALL EHIST                                                   HIST    00250
C         ----------                                                   HIST    00251
      ELSE                                                             HIST    00252
C                                                                      HIST    00253
C   ...   PARTICLE TO BE TRACKED IS A PHOTON                           HIST    00254
C         ----------------------------------                           HIST    00255
        LPCZ = LBCZ                                                    HIST    00262
C                                                                      HIST    00265
        CALL PHIST(X,Y,Z,LB,CTH(1),STH(1),CPH(1),SPH(1),T,W,1)         HIST    00266
C       ------------------------------------------------------         HIST    00267
      END IF                                                           HIST    00269
C                                                                      HIST    00270
C                                                                      HIST    00271
C ... REMOVE SECONDARY ELECTRONS FROM STORAGE FOR TRANSPORT            HIST    00272
C -----------------------------------------------------------          HIST    00273
      IF (LAST .NE. 0) THEN                                            HIST    00274
        LB     = LBS(LAST)                                             HIST    00275
        Z      = ZS(LAST)                                              HIST    00276
        T      = TS(LAST)                                              HIST    00277
        NT     = NTS(LAST)                                             HIST    00278
        CTH(1) = CTHS(LAST)                                            HIST    00279
        W      = WS(LAST)                                              HIST    00280
        IPR    = IPRS(LAST)                                            HIST    00281
C                                                                      HIST    00283
        X      = XS(LAST)                                              HIST    00284
        Y      = YS(LAST)                                              HIST    00285
        STH(1) = STHS(LAST)                                            HIST    00286
        CPH(1) = CPHS(LAST)                                            HIST    00287
        SPH(1) = SPHS(LAST)                                            HIST    00288
C                                                                      HIST    00289
        LBCZ  = LBCS(LAST)                                             HIST    00291
        KLOOP = KLOOP+1                                                HIST    00292
        LAST = LAST-1                                                  HIST    00294
        GO TO 70                                                       HIST    00295
      END IF                                                           HIST    00296
C                                                                      HIST    00297
      IF (.NOT. FLPHD) GO TO 1299                                      HIST    00298
C                                                                      HIST    00299
C                                                                      HIST    00300
C ... SCORE PULSE-HEIGHT DISTRIBUTION                                  HIST    00301
C -----------------------------------                                  HIST    00302
      EABST = CZERO                                                    HIST    00303
      DO 100 LS=LPHDB,LPHDE                                            HIST    00304
        EABST    =  EABST+PHDD(LS)                                     HIST    00305
  100   PHDD(LS) = CZERO                                               HIST    00306
      DO 110 JS=1,JSMAX                                                HIST    00307
        IF(SMARK(JS) .LE. EABST) GO TO 120                             HIST    00308
  110 CONTINUE                                                         HIST    00309
      NPHD = NPHD+1                                                    HIST    00310
      GO TO 1299                                                       HIST    00311
  120 ABE(JS) = ABE(JS)+CWCF                                           HIST    00312
 1299 IF(NINDV.EQ.0)GO TO 130
      DO 1298 NIND=1,NINDV
        EDTL(NIND)=EDPR(NIND)+EDNK(NIND)+EDSC(NIND)
1298  CONTINUE
        WRITE(44)(EDPR(NIND),EDNK(NIND),EDSC(NIND),EDTL(NIND),NIND
     $  =1,NINDV)
  130 CONTINUE                                                         HIST    00313
C                                                                      HIST    00314
      CALL RANSAV(IRC)                                                 HIST    00315
C     ----------------                                                 HIST    00316
      RETURN                                                           HIST    00317
      END                                                              HIST    00318
```

APPENDIX 8
MCNPX Source Subroutine for PASP Dome D3

```
c_deck so source                                                    so          1
      subroutine source                                             so          2
c   user supplied source subroutine
#include "cm.h"
c
c
c
c      This is the source routine for the Dome3 dosimeter.
c      Electron source covers the top of the aluminum dome.
c      The name of this deck is sourcd3.F
c
      dimension specin(11),esp(11)
      data specin/1.0 ,.9553,.9062,.8559,.8046,.7508,.6932,.6312,
     $.5627,.4573,0./
      data esp/10., 9.2,9.1,9.,8.9,8.6,8.3,8.,7.5,5., 0./
      data shlrad,twopie/1.7958,6.2831853/
      wgt=1.0
      tme=0.0
      jsu=16
      icl=14
c
c     The source energy
      erg=10.0
      ra=rang()
      do 14 jhist=2,11
      if(ra.gt.specin(jhist))go to 16
14    continue
16    erg= esp(jhist-1)+(ra-specin(jhist-1))*(esp(jhist)-
     $esp(jhist-1))/(specin(jhist)-specin(jhist-1))
c
c     ipt=3 denotes electron source.  To change to protons,
c     set ipt=9
c
      ipt=3
      stth=rang()
      ctth=sqrt(1.-stth*stth)
      pph=twopie*rang()
      cpph=cos(pph)
      spph=sin(pph)
      al=stth*cpph
      bt=stth*spph
      xxx=shlrad*al
      yyy=shlrad*bt
      zzz=shlrad*ctth
10    phs=twopie*rang()
      ths=0.5*twopie*rang()
      cths=cos(ths)
      sths=sqrt(1.-cths*cths)
      sphs=sin(phs)
      cphs=cos(phs)
      uuu=sths*cphs
      vvv=sths*sphs
      www=cths
      aa=sqrt(uuu**2+vvv**2+www**2)
      uuu=uuu/aa
      vvv=vvv/aa
      www=www/aa
      prod=al*uuu+bt*vvv+ctth*www
      if(prod.gt.0)go to 10
      do 50 ispr=1,3
50    spare(ispr)=0.0
      return
      end                                                           so          13
```